



# RebelAmp

## Owner's manual

### RebelAmp is a class-A headphone amplifier and preamp

1. If you don't know how to install audio devices, get a qualified professional to help.
2. Never use this device near water, and clean only with a dry cloth.
3. Assure adequate ventilation, do not block any ventilation openings, or place near heat sources.
4. Use only the supplied power cord or suitable replacement. Route cords away from traffic areas and protect them from being pinched. Unplug the cord from the outlet if the apparatus is unused for a long period of time.
5. To prevent electric shock, do not use the plug with an extension cord, receptacle, or outlet unless blades can be fully inserted.
6. Refer all servicing to qualified service personnel. Service is required when the device has been damaged, including cord or plug damage, liquid has been spilled or objects have fallen into the device, the device has been exposed to rain or moisture, does not operate normally, or has been dropped.
7. Do not expose this device to rain or moisture.


### What's in the box

- RebelAmp - 1

### Getting started

1. Make sure that volume knob is turned to the left at minimum position.
2. Connect your inputs and outputs (stereo headphones, source, poweramp or powered speakers).
3. Turn on the amp, select headphones or preamp output. Amp engages immediately.

### Controls

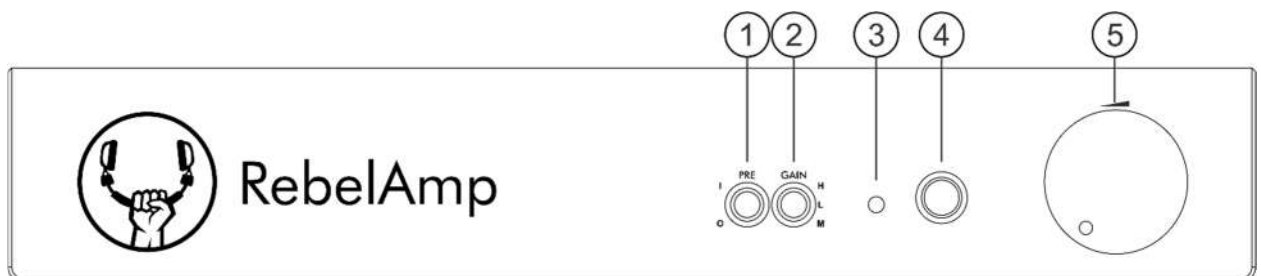

1. **Preamp selector.** 0 – headphone output, I – preamp output.
2. **Gain switch.** H – HIGH, L – LOW, M – MEDIUM.
3. **Power On LED** indicator.

4. **SE Headphone Jack.** Plug in stereo headphones here with ¼" plug. Do NOT plug in mono Jacks!
5. **Volume Knob.** Turn it to the right to adjust volume.

**Warning!** – always turn down the volume when switching GAIN or switching between headphone output and preamp out.

## Connections



1. **SE Input.** Connect your source with RCA cable.
2. **SE Preamp Output.** Connect powered speakers or power amplifier with RCA cables.
3. **AC Input.** Plug the power cord in here. Plug the other end into an outlet of the correct voltage. Trying to run 115V amplifier on 230V will spoil your amp and your day.
4. **On-Off Switch.** I – On green LED indicator on front will light up. O – Off.



# Rebel Audio

[info@rebel.audio](mailto:info@rebel.audio)

RebelAmp is based on AMB Laboratories technology published by Ti Kan ([www.amb.org](http://www.amb.org)), and is used with permission.