




Data Sheet

Releasable Cable Ties

TRT-05, TRT-12, ***TRT-14

NYLON 6/6 POLYAMIDE

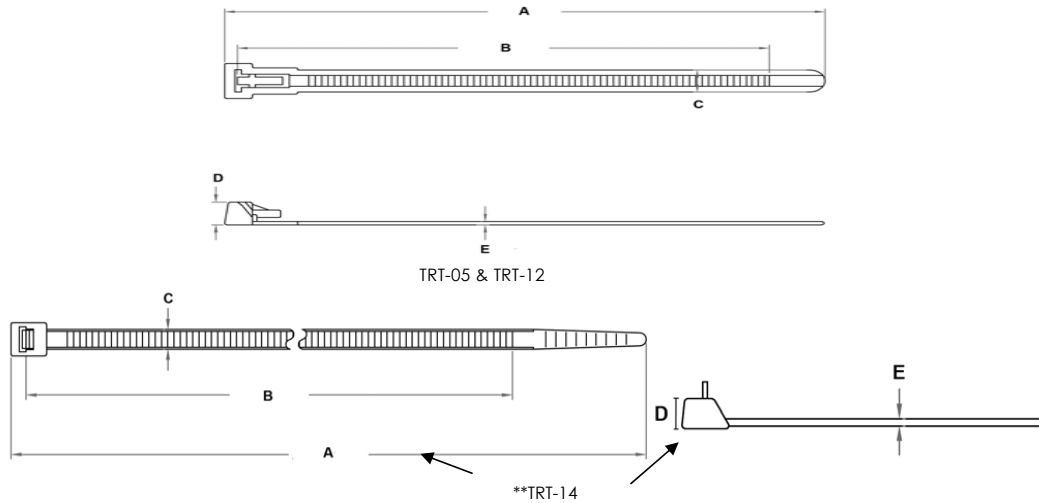

TIEWRAP.COM PART NUMBER	BUNDLE DIAMETER		A IN (mm)	B IN (mm)	C IN (mm)	D IN (mm)	E IN (mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 MH FLAMABILITY RATING
	MIN IN (mm)	MAX IN (mm)							
TRT-05-N	.230 (6.0mm)	1.250 (32.0mm)	5.906 (150.000mm) +/- .138 (3.500mm)	5.236 (133.500mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307 (7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2
TRT-05-B	.230 (6.0mm)	1.250 (32.0mm)	5.906 (150.000mm) +/- .138 (3.500mm)	5.236 (133.500mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307 (7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2
TRT-12-N	.230 (6.0mm)	2.87 (73.0mm)	11.930 (303.000mm) +/- .098 (2.500mm)	11.142 (283.000mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307 (7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2
TRT-12-B	.230 (6.0mm)	2.87 (73.0mm)	11.930 (303.000mm) +/- .098 (2.500mm)	11.142 (283.000mm) +/- .098 (2.500mm)	.299 (7.600mm) +/- .014 (.360mm)	.307 (7.800mm) +/- .307 (.360mm)	.051 (1.300mm) +/- .010 (.250mm)	50 (222)	V-2
***TRT-14-N	MAX 4.000 (102.0mm)		14.488 (368mm) +/- .098 (2.500mm)	13.307 (338.000mm) +/- .098 (2.500mm)	.189 (4.800mm) +/- .012 (.300mm)	.201 (5.100mm) +/- .014 (.360mm)	.063 (1.600mm) +/- .010 (.250mm)	50 (222)	V-2
***TRT-14-B	MAX 4.000 (102.0mm)		14.488 (368mm) +/- .098 (2.500mm)	13.307 (338.000mm) +/- .098 (2.500mm)	.189 (4.800mm) +/- .012 (.300mm)	.201 (5.100mm) +/- .014 (.360mm)	.063 (1.600mm) +/- .010 (.250mm)	50 (222)	V-2

COLOR DESIGNATIONS:

B = UV BLACK N = NATURAL