




Data Sheet

Hole Mount Tie Wraps

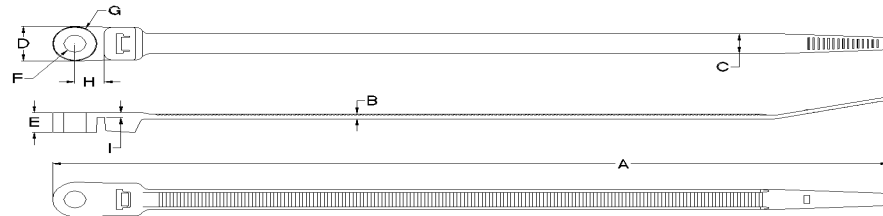

TIEWRAP.COM PART NUMBER	BUNDLE DIAMETER		A	B	C	D	E	F	G	H	I	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 MH FLAMABILITY RATING
	MIN IN (mm)	MAX IN (mm)	IN (mm) +/- .030 (.762mm)	IN (mm) +/- .005 (.127mm)	IN (mm) +/- .005 (.127mm)	IN (mm) +/- .020 (.508mm)	IN (mm) +/- .020 (.508mm)	IN (mm) +/- .005 (.127mm)	IN (mm) +/- .020 (.508mm)	IN (mm) +/- .030 (.762mm)	IN (mm) +/- .020 (.508mm)		
*HMT-06-N	.100 (2.550mm)	1.250 (31.750mm)	5.875 (149.225mm)	.045 (1.143mm)	.138 (3.505mm)	.310 (7.874mm)	.175 (4.445mm)	.175 (4.445mm)	.312 (7.924mm)	.325 (8.255mm)	.046 (1.168mm)	40 (180)	V-2
*HMT-06-B	.100 (2.550mm)	1.250 (31.750mm)	5.875 (149.225mm)	.045 (1.143mm)	.138 (3.505mm)	.310 (7.874mm)	.175 (4.445mm)	.175 (4.445mm)	.312 (7.924mm)	.325 (8.255mm)	.046 (1.168mm)	40 (180)	V-2
HMT-08-N	.062 (1.587mm)	1.750 (44.450mm)	8.000 (203.200mm)	.052 (1.320mm)	.177 (4.495mm)	.364 (9.245mm)	.183 (4.668mm)	.208 (5.283mm)	.361 (9.169mm)	.325 (8.255mm)	.049 (1.244mm)	50 (222)	V-2
HMT-08-B	.062 (1.587mm)	1.750 (44.450mm)	8.000 (203.200mm)	.052 (1.320mm)	.177 (4.495mm)	.364 (9.245mm)	.183 (4.668mm)	.208 (5.283mm)	.361 (9.169mm)	.325 (8.255mm)	.049 (1.244mm)	50 (222)	V-2
HMT-12-N	.062 (1.587mm)	3.00 (76.20mm)	11.500 (292.100mm)	.053 (1.346mm)	.177 (4.495mm)	.357 (9.067mm)	.179 (4.546mm)	.206 (5.232mm)	.356 (9.042mm)	.324 (8.229mm)	.060 (1.524mm)	50 (222)	V-2
HMT-12-B	.062 (1.587mm)	3.00 (76.20mm)	11.500 (292.100mm)	.053 (1.346mm)	.177 (4.495mm)	.357 (9.067mm)	.179 (4.546mm)	.206 (5.232mm)	.356 (9.042mm)	.324 (8.229mm)	.060 (1.524mm)	50 (222)	V-2
HMT-15-N	.187 (4.762mm)	4.062 (103.174mm)	15.750 (400.050mm)	.075 (1.905mm)	.298 (7.569mm)	.513 (13.030mm)	.298 (7.569mm)	.256 (6.502mm)	.510 (12.954mm)	.345 (8.763mm)	.074 (1.879mm)	120 (534)	V-2
HMT-15-B	.187 (4.762mm)	4.062 (103.174mm)	15.750 (400.050mm)	.075 (1.905mm)	.298 (7.569mm)	.513 (13.030mm)	.298 (7.569mm)	.256 (6.502mm)	.510 (12.954mm)	.345 (8.763mm)	.074 (1.879mm)	120 (534)	V-2



TIEWRAP.COM – MOUNTING HEAD SERIES TIE WRAPS

COLOR DESIGNATIONS:

B = UV BLACK N = NATURAL

MATERIAL:

NYLON 6/6 POLYAMIDE

CONFIDENTIAL PROPERTY OF TIEWRAP.COM, INC.

THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF TIEWRAP.COM, INC.

Please Note - *HMT-06-B-N'S are made in China.

Moulded-in screw hole mount provides one piece mounting and bundling.

Black Tie Wraps are UV resistant, recommended for outdoor usage.

Sizes (HMT - 06 / 08 / 12) are now available in Natural.

Temperature Ratings 185 F / 85 C.

UL Flame Rating 94V-2.

Minimum installation temperature is greater than 32 F or 0 C.

Made From Nylon 6/6.

*Made in USA.

Sold in Bags of 100