



2250D

PARTS

<p>① X 1</p>	<p>A.M6*25 X 4</p>
<p>② X 1</p>	<p>B.M8*25 X 4</p>
<p>③ X 1</p>	<p>C.M8*30 X 4</p>
<p>④ X 1</p>	<p>D.X 4</p>
<p>E.X 1</p>	
<p>⑤ X 1</p>	<p>F.X 5</p>
<p>⑥ X 1</p>	<p>G.X 2</p>
<p>⑦ X 1</p>	<p>H.X 2</p>

NOTICE:
 EVERY 6 MONTHS, PLEASE MAKE SURE ALL BOLTS, SCREWS AND KNOBS ARE FULLY TIGHTENED TO ENSURE STABILITY.

Assembly instructions

STEP 1

F 5 PCS

STEP 2

STEP 3

A 4PCS
 D 4PCS
 G 2PCS
 H 2PCS

STEP 4

B 4PCS
 E 4PCS

STEP 5

C 4PCS
 D 4PCS
 E 4PCS

STEP 6

TOP

NEED HELP? 215-961-2242 Monday thru Friday 9 TO 5 EST

CONTROL MECHANISM



* Flip back armrest



* Chair Height Adjustment


- To increase chair height pull lever upward while lifting body weight slightly off the seat.
- Release lever at desired height.

- To lower chair height sit fully into the chair and pull lever upward.
- Release lever at desired height.



* Adjustable Chair Tension Speed


- Turn continuously to adjust how quickly chair tilts back & forth.

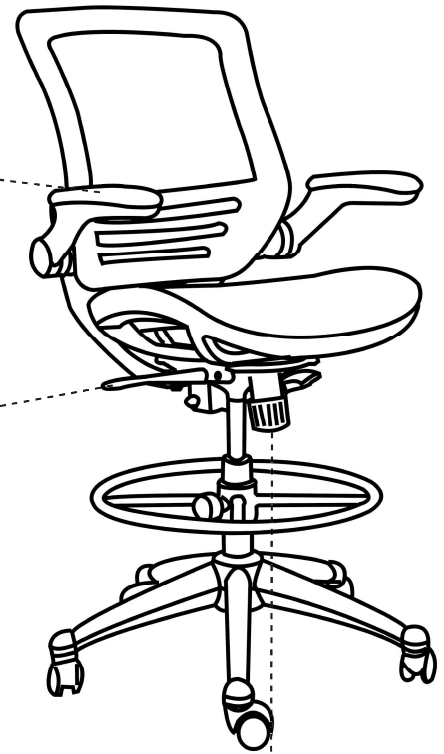

Note: If adjusting while sitting in chair:
Turn knob left to tighten tension.
Turn knob right to loosen tension.

Instruction Addendum

STEP 3:

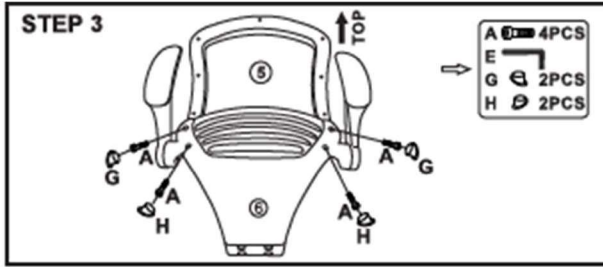

Leave all 4 bolts loose when assembling the arm piece to the back. Start on the lower left. Once that bolt is started, move to the lower right, then the two top bolts. Completely tighten once all bolts have been inserted.