




Product Datasheet

New 2020 Edition 2>Recessed Spots Fixed LED

10108R/B/W

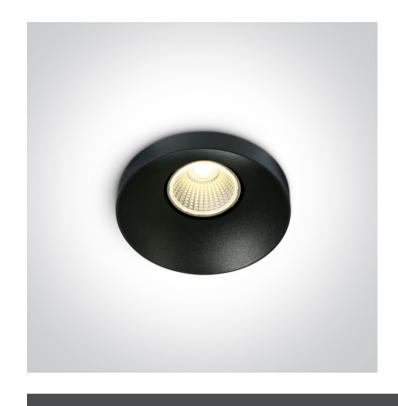

8W COB LED recessed Spot.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions



Physical Specification


Item Group	New 2020 Edition 2
Family	Recessed Spots Fixed LED
Order Code	10108R/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	50mm
Diameter	81mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	20V
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	5-8,4W
Power Factor	0,9
Constant Current	Yes
350mA	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload
Ilumination Data	
	2000K
Colour Temperature	3000K
Colour Temperature Lumen Output	560lm
Colour Temperature Lumen Output Light Efficiency	560lm 70lm/W
Colour Temperature Lumen Output Light Efficiency CRI	560lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	560lm 70lm/W
Colour Temperature Lumen Output Light Efficiency CRI	560lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	560lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	560lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	560lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	560lm 70lm/W 80 60°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	560lm 70lm/W 80 60° 50
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton Barcode	560lm 70lm/W 80 60° 50 5291889066101

Energy Label



Certification & Warranty

Warranty	3 Years
Weee Directive	Yes



