

New 2021 Edition 2>Recessed Spots Fixed LED

## 10112BTR/BS/W



12W COB LED 2-Step trimless Recessed spot, IP20, for general application. Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions



### Gallery



### Must be ordered separately



89015A

Related items



89015AT


Physical Specification

|                           |                          |
|---------------------------|--------------------------|
| Item Group                | New 2021 Edition 2       |
| Family                    | Recessed Spots Fixed LED |
| Order Code                | 10112BTR/BS/W            |
| Colour                    | Brass Reflector          |
| Material                  | Aluminium                |
| Shape                     | Circular                 |
| Height                    | 92mm                     |
| Diameter                  | 64mm                     |
| Cutout Hole Diameter      | 70mm                     |
| Recessed trimless ceiling | Yes                      |
| Depth Required            | 110mm                    |
| Indoor                    | Yes                      |
| Adjustable                | No                       |

Electrical Characteristics


|               |                  |
|---------------|------------------|
| Fitting       |                  |
| Input Type    | Constant Current |
| Input Current | 700mA            |
| Safety Class  | III              |
| Power(Watts)  | 12W              |
| IP Rating     | IP20             |
| Light Source  | LED built in     |
| LED Type      | COB              |

|              |  |
|--------------|--|
| LED Brand    |  |
| Cable Length |  |
| F Mark       |  |

|   |
|---|
| Bridgelux   |
| 40cm  |
|  |

## Illumination Data

|                      |  |
|----------------------|--|
| Colour Temperature   |  |
| Lumen Output         |  |
| Light Efficiency     |  |
| CRI                  |  |
| Beam Angle           |  |
| Illumination Diagram |  |
| Dark Light           |  |


|  |
|--|
| 3000K  |
| 1100lm   |
| 91,67lm/W  |
| 90   |
| 40°  |
|  |
| Yes  |

## Packing Info

|            |  |
|------------|--|
| Pcs/Carton |  |
| Barcode    |  |
| HS Code    |  |

|               |
|---------------|
| 48            |
| 5291889070078 |
| 9405409900    |

## Energy Label

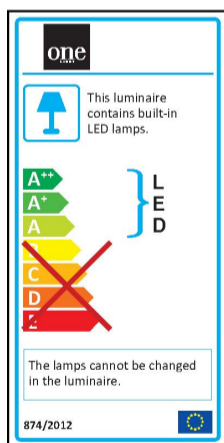

Warranty

5 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

