

Product Datasheet

www.1-light.eu

06 Downlights Fixed LED>The Frameless IP65 Range

10115CF/C



15W LED frameless downlight, IP65. Suitable for Indoor/Outdoor installation and bathroom.

Complete with 500mA driver.

Complies with standard EN60598-1 and any other specific standards.












Downloads







Dimensions

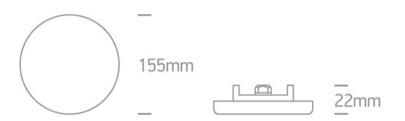

Gallery



Related items







050146/W

Physical Specification

Item Group

06 Downlights Fixed LED


Family

The Frameless IP65 Range

Order Code	10115CF/C
Colour	White
Material	Die Cast
Diffuser Material	PC
Shape	Circular
Height	22mm
Diameter	155mm
Cutout Hole Diameter	135mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8
Electrical Characteristics	
Electrical Characteristics	
Electrical Characteristics Gear	External-Included
Gear	External-Included
	External-Included
Gear	External-Included 220-240V
Gear Fitting + Driver	
Gear Fitting + Driver Input Voltage	220-240V
Gear Fitting + Driver Input Voltage 50 Hz	220-240V Yes
Gear Fitting + Driver Input Voltage 50 Hz 60 Hz	220-240V Yes
Gear Fitting + Driver Input Voltage 50 Hz 60 Hz Safety Class	220-240V Yes Yes
Gear Fitting + Driver Input Voltage 50 Hz 60 Hz Safety Class Power(Watts)	220-240V Yes Yes 15W
Fitting + Driver Input Voltage 50 Hz 60 Hz Safety Class Power(Watts) IP Rating	220-240V Yes Yes 15W IP65
Gear Fitting + Driver Input Voltage 50 Hz 60 Hz Safety Class Power(Watts) IP Rating Light Source	220-240V Yes Yes 15W IP65 LED built in
Fitting + Driver Input Voltage 50 Hz 60 Hz Safety Class Power(Watts) IP Rating Light Source Dimmable	220-240V Yes Yes In the state of the state o
Fitting + Driver Input Voltage 50 Hz 60 Hz Safety Class Power(Watts) IP Rating Light Source Dimmable	220-240V Yes Yes In the state of the state o

Input Current	500mA		
Voltage	22,5V		
Safety Class	ŢII]		
Power(Watts)	11,25W		
IP Rating	IP65		
Light Source	LED built in		
LED Type	SMD 4014		
LED Brand	Zhaochi		
F Mark	F		
Gear			
Gear Type	Led Driver		
Input Voltage	220-240V		
50 Hz	Yes		
60 Hz	Yes		
Power(Watts)	8,5-12W		
Power Factor	0,9		
Constant Current	Yes		
500mA	17-24V		
IP Rating	IP20		
Safety Class			
Dimmable	No		
Housing Material	Plastic		
Output Terminal	Cable		
Brand	Kegu		
Ilumination Data			
Oalana Tanananat	400016		
Colour Temperature	4000K		
Lumen Output	1200lm		
Light Efficiency	80lm/W		
CRI	80		

Beam Angle			




Packing Info				
Box Length	21cm			
Box Width	19,5cm			
Box Height	3cm			
Box Weight	0,46Kg			
Pcs/Carton	20			
Carton Length	43cm			
Carton Width	37cm			
Carton Height	22cm			
Carton Weight	9,3Kg			
Barcode	5291889057116			
HS Code	9405409900			

120°

Energy Label

Illumination Diagram



Certification & Warranty

Warranty 5 Years

Yes

Weee Directive

switch to one light!

