

06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

**10148P/W/D**



Recessed circular LED panel.

Complete with 1200mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

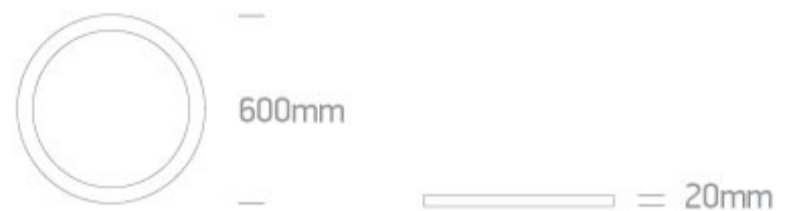

Gallery



Related items



89050L



89050TLD

Physical Specification

Item Group



06 Downlights Fixed LED

Family


The 40-48W Round Recessed Panels Die Cast

Order Code	10148P/W/D
Colour	White
Material	Die Cast
Shape	Circular
Height	14mm
Diameter	600mm
Cutout Hole Diameter	585mm
Recessed T-Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No


#### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	36V

Safety Class	
Power(Watts)	43,2W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	43,2-50,4W
Power Factor	0,95
Constant Current	Yes
1200mA	36-42V
IP Rating	IP20
Safety Class	
Dimmable	Yes
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Output Terminal	Cable
Brand	ID
Protection	No-Load, Short Circuit

## Illumination Data


Colour Temperature	6000K
Lumen Output	3200lm
Light Efficiency	66,67lm/W
CRI	80
Beam Angle	120°



## Packing Info

Box Weight	4,4Kg
Pcs/Carton	2
Barcode	5291889038351
HS Code	9405109890

## Energy Label

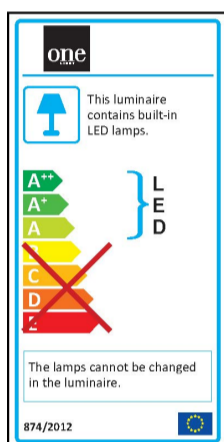

## Certification &amp; Warranty

Warranty	2 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

