

04 Recessed Spots Adjustable LED>The Interchanging Rings Range

11107K/B/W



7W COB LED adjustable recessed spot with interchangeable rings.


Ring must be ordered separately.

Requires 700mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads Dimensions

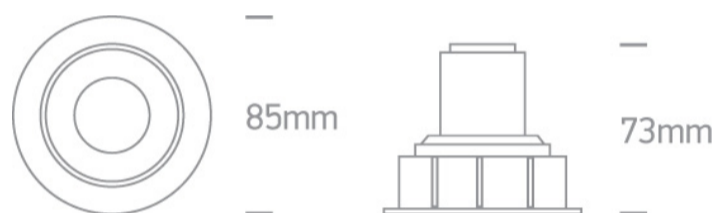

Must be ordered separately



050102/B



050102/BS



050102/C



050102/CU



050102/W



89015A

Physical Specification


| | |
|----------------------|----------------------------------|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The Interchanging Rings Range |
| Order Code | 11107K/B/W |
| Colour | Black |
| Material | Aluminium |
| Shape | Circular |
| Height | 73mm |
| Diameter | 85mm |
| Cutout Hole Diameter | 76mm |
| Recessed Ceiling | Yes |
| Depth Required | 100mm |
| Indoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

Fitting

| | |
|---------------|---|
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 10V |
| Safety Class |  |
| Power(Watts) | 7W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Cree |
| LED Number | 1 |
| Cable Length | 40cm |
| F Mark |  |


Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 550lm |
| Light Efficiency | 78,57lm/W |
| CRI | 80 |
| Beam Angle | 35° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 9,5cm |
| Box Width | 9,5cm |
| Box Height | 8,5cm |
| Box Weight | 0,260Kg |
| Pcs/Carton | 30 |
| Barcode | 5291889054177 |
| HS Code | 9405409900 |

Energy Label

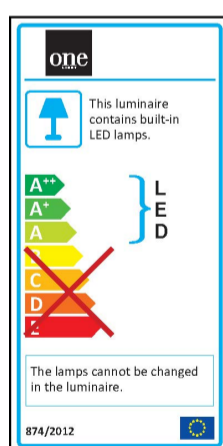

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

