




Product Datasheet

New 2022 Edition 3>Wall and Ceiling LED

12120X/B/W

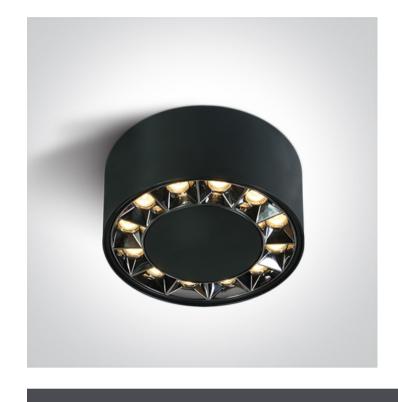

20W Surface ceiling spot, IP20.

Complete with 450mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Physical Specification

Item Group	New 2022 Edition 3
Family	Wall and Ceiling LED
Order Code	12120X/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	58mm
Diameter	116mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No
Shape Height Diameter Surface Ceiling Indoor	Circular 58mm 116mm Yes

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	12,15-18W
Power Factor	0,9
Constant Current	Yes
450mA	27-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-20°C+60°C
Operating Temp	85°C
Brand	Eaglerise
Protection	Over Load Protection, Over Voltage Protection, Short circuit Protection
Ilumination Data	
Ilumination Data Colour Temperature	3000K
	3000K 1600lm
Colour Temperature	
Colour Temperature Lumen Output	1600lm
Colour Temperature Lumen Output Light Efficiency	1600lm 80lm/W
Colour Temperature Lumen Output Light Efficiency CRI	1600lm 80lm/VV 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1600lm 80lm/VV 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1600lm 80lm/W 90 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	1600lm 80lm/W 90 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1600lm 80lm/W 90 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	1600lm 80lm/W 90 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	1600lm 80lm/W 90 38° Yes
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton	1600lm 80lm/W 90 38° Yes

Certification & Warranty

switch to one light!

