




Product Datasheet

14 Wall & Ceiling LED>The SMD Cylinders Aluminium

12125L/W/W

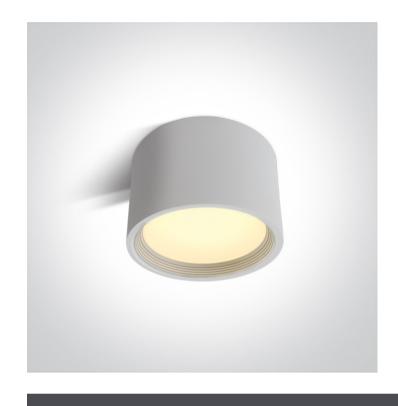

25W COB LED ceiling downlight, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions




Physical Specification

Item Group	14 Wall & Ceiling LED
Family	The SMD Cylinders Aluminium
Order Code	12125L/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	115mm
Diameter	162mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	16,2-25,2W

Power Factor	0,9
Constant Current	Yes
600mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
lumination Data	
Colour Temperature	3000K
Lumen Output	2050lm
Light Efficiency	82lm/W
CRI	80
Beam Angle	90°
Illumination Diagram	
Packing Info	
Box Length	17,5cm
Box Width	17,5cm
Box Height	12,5cm
Box Weight	0,83Kg
Pcs/Carton	36
Barcode	5291889041009
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



