

21 Industrial & Floodlights>The IP65 LED Slim Range PC

38118LA/D



IP65 slim LED fitting .

Stainless steel clips and suspension included.

Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

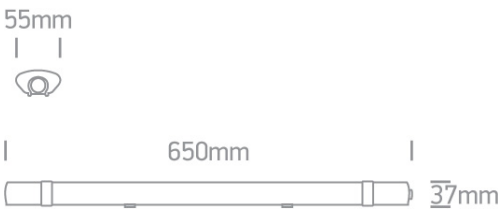

Gallery



Must be ordered separately




050084

Physical Specification

Item Group	21 Industrial & Floodlights
Family	The IP65 LED Slim Range PC
Order Code	38118LA/D
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	650mm
Width	65mm
Height	37mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length	50cm
F Mark	

Fitting

Input Type	Constant Current
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	18W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	6000K
Lumen Output	1600lm
Light Efficiency	88,9lm/W
CRI	80

Beam Angle	
Illumination Diagram	


120°


Packing Info

Box Length	
Box Width	
Box Height	
Box Weight	
Pcs/Carton	
Barcode	
HS Code	

66cm
9,5cm
9,2cm
0,25Kg
20
5291889051107
9405104090

Energy Label

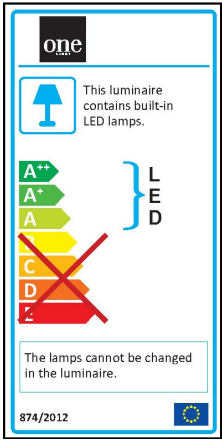

Certification & Warranty

Warranty	
Weee Directive	

2 Years
Yes

switch to
one light!

