

21 Industrial & Floodlights>The IP65 LED Connectable Range Double

## 38245LC/C



45W IP65 slim LED connectable fitting .

Stainless steel clips and suspension included.

Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions



### Gallery



### Must be ordered separately



050084

## Physical Specification


Item Group	21 Industrial & Floodlights
Family	The IP65 LED Connectable Range Double
Order Code	38245LC/C
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	1565mm
Width	40mm
Height	79mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

## Electrical Characteristics

Gear	Built In
------	----------

### Fitting + Driver


Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	45W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length	50cm
F Mark	

### Fitting

Input Type	Constant Current
Power(Watts)	45W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

### Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	45W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

### Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	88,89lm/W
CRI	80

Beam Angle

120°

Illumination Diagram



## Packing Info

Pcs/Carton

10


Barcode

5291889061670

HS Code

9405104090

## Energy Label

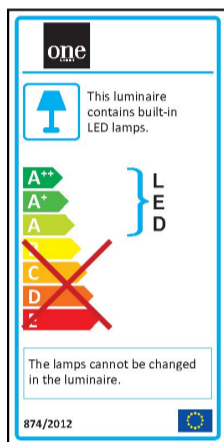

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

