




# **Product Datasheet**

### 02 Recessed Spots Fixed LED>The Mirror Dark Light Range

## 50103H/B/W

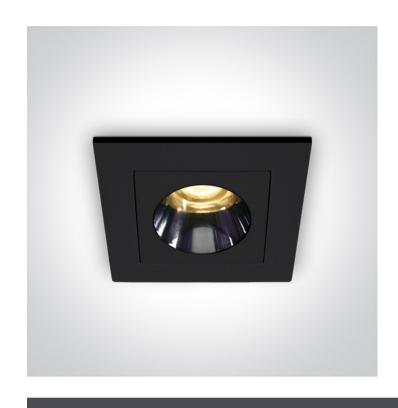

3W Dark light recessed spot, IP20.

Complete with 700mA driver.

Complies with standard EN60598-1 and any other specific standards.



#### Downloads










#### Dimensions

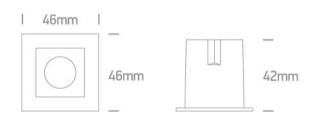

#### **Physical Specification**

Item Group	02 Recessed Spots Fixed LED
Family	The Mirror Dark Light Range
Order Code	50103H/B/W
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	46mm
Width	46mm
Height	42mm
Cutout Hole Width	38mm
Cutout Hole Length	38mm
Recessed Ceiling	Yes

Depth Required	70mm
Indoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	3,5V
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 3535
LED Brand	Bridgelux
LED Number	1
F Mark	F
Gear	

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	1,75-3,15W
Power Factor	0,5
Constant Current	Yes
700mA	2,5-4,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-20°C+50°C
Operating Temp	75°C
Brand	Eaglerise
Protection	Over Load Protection, Over Voltage Protection, Short circuit Protection
Ilumination Data	
Ilumination Data	
Ilumination Data  Colour Temperature	3000K
	3000K 160lm
Colour Temperature	
Colour Temperature  Lumen Output	160lm
Colour Temperature  Lumen Output  Light Efficiency	160lm 53,33lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	160lm 53,33lm/W 90
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	160lm 53,33lm/W 90
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	160lm 53,33lm/W 90 38°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	160lm 53,33lm/W 90 38°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light	160lm  53,33lm/W  90  38°  Yes
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info  Pcs/Carton	160lm 53,33lm/W 90 38°  Yes
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light	160lm  53,33lm/W  90  38°  Yes

Warranty 5 years

# switch to one light!

