


www.1-light.eu

10 Track Spots>The COB Track Spot Range

65614NT/B/C

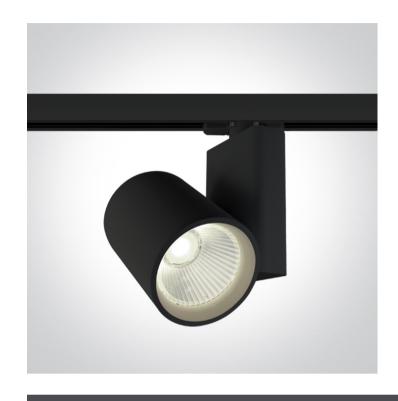

42W track spot with COB LED, ideal for shops and showrooms.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions



Related items



40003A/B


Physical Specification

Item Group	10 Track Spots
Family	The COB Track Spot Range
Order Code	65614NT/B/C
Colour	Black
Material	Aluminium
Shape	Circular
Height	128mm

Diameter	100mm
Track mounted	Yes
Indoor	Yes
Adjustable	2 Directions
lectrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	42W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Fitting	
Input Type	Constant Current
Input Current	1050mA
Voltage	38V
Safety Class	<u> </u>
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Sanan
Gear	

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	35-42W
Power Factor	0,9
Constant Current	Yes
1050mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Lifud
	Short Circuit Protection
Protection	
Protection	
Ilumination Data	
Ilumination Data	
Ilumination Data Colour Temperature	4000K
Ilumination Data	4000K 3500lm
Ilumination Data Colour Temperature	
Ilumination Data Colour Temperature Lumen Output	3500lm
Colour Temperature Lumen Output Light Efficiency	3500lm 83,33lm/W
Colour Temperature Lumen Output Light Efficiency CRI	3500lm 83,33lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	3500lm 83,33lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	3500lm 83,33lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3500lm 83,33lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3500lm 83,33lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3500lm 83,33lm/W 80 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3500lm 83,33lm/W 80 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	3500lm 83,33lm/W 80 38° 25cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	3500lm 83,33lm/W 80 38° 25cm 15cm 10,5cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	3500lm 83,33lm/W 80 38° 25cm 15cm 10,5cm

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

one

switch to one light!

