




Product Datasheet

14 Wall & Ceiling LED>Reading Spots

65746R/B/W

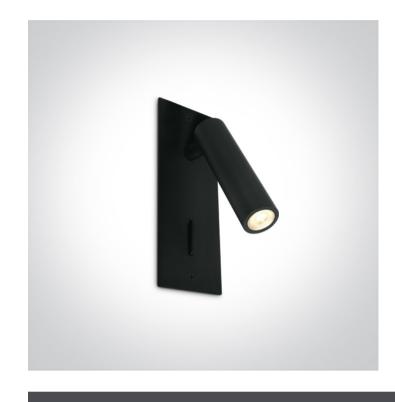

3W COB LED bedside recessed adjustable fitting, ideal for room hotel installation, IP20.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions




Physical Specification

Item Group	14 Wall & Ceiling LED
Family	Reading Spots
Order Code	65746R/B/W
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	60mm
Width	47mm
Height	150mm
Cutout Hole Width	115mm
Cutout Hole Length	50mm
Recessed wall	Yes

Depth Required	50mm
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	4V
Safety Class	
Power(Watts)	2,8W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Samsung
Gear	
Gear Type	Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	1,75-2,8W
Power Factor	0,5
Constant Current	Yes
700mA	2,5-4v
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	Eaglrese
Hardwarf and Barbara	
ilumination Data	
Ilumination Data	
Colour Temperature	3000K
	3000K 150lm
Colour Temperature	
Colour Temperature Lumen Output	150lm
Colour Temperature Lumen Output Light Efficiency	150lm 50lm/W
Colour Temperature Lumen Output Light Efficiency CRI	150lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	150lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	150lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	150lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	150lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	150lm 50lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	150lm 50lm/W 80 36°

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



