

22 Emergency Lights > Emergency LED Plafo

67280ANE/G/W



15W Emergency LED plafo light, IP65, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

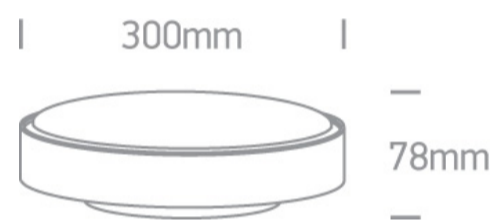

Physical Specification

Item Group	22 Emergency Lights
Family	Emergency LED Plafo
Order Code	67280ANE/G/W
Colour	Grey
Material	Plastic
Diffuser Material	PC
Shape	Circular
Height	75mm
Diameter	300mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes

Adjustable

No

IK Rating

8

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

15W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

300mA

Power(Watts)

15W

IP Rating

IP65

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

F Mark



Gear

Gear Type


Led Driver

Input Voltage


220-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	10-16W
Power Factor	0,9
Constant Current	Yes
300mA	35-50V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	1000lm
Light Efficiency	66,67lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	31cm
Box Width	31cm
Box Height	8,5cm
Box Weight	1,4Kg
Pcs/Carton	10
Barcode	5291889051725
HS Code	9405104090

Energy Label



Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

