

14 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

**67376/AN/W**



2x3W, IP54, SMD 2835, Outdoor Slim Range Up & down beam.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

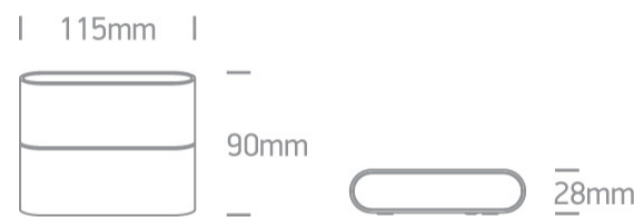

Physical Specification

Item Group	14 Wall & Ceiling LED
Family	Outdoor Slim Range Up & down beam
Order Code	67376/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	115mm
Width	90mm
Height	28mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

## Gear

## Built In

## Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

2x3W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



## Fitting

Input Type

Constant Current

Input Current

350mA

Voltage

16V

Power(Watts)

5,6W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Edison

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)


2,9-6,1W

Power Factor

0,5

Constant Current	Yes
350mA	8,5-17,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Cable
Manufacturer	Eaglerise


### Illumination Data

Colour Temperature	3000K
Lumen Output	2x210lm
Light Efficiency	70lm/W
CRI	80
Illumination Diagram	

### Packing Info

Box Length	9,5cm
Box Width	5,2cm
Box Height	15cm
Box Weight	0,42Kg
Pcs/Carton	24
Barcode	5291889043638
HS Code	9405409900

### Energy Label

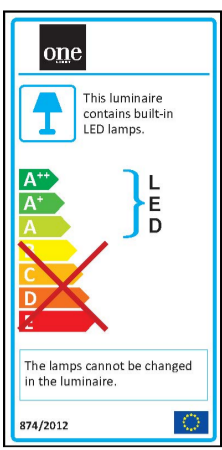

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

**one**  
LIGHT

