

20 Garden & Underwater > LED Garden Path Lights Die Cast

67460B/AN/W



2x6W LED Bollard, IP54 for Garden illumination.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Physical Specification

|                      |                                 |
|----------------------|---------------------------------|
| Item Group           | 20 Garden & Underwater          |
| Family               | LED Garden Path Lights Die Cast |
| Order Code           | 67460B/AN/W                     |
| Colour               | Anthracite                      |
| Material             | Aluminium                       |
| Diffuser Material    | PC                              |
| Shape                | Rectangular                     |
| Length               | 100mm                           |
| Width                | 50mm                            |
| Height               | 600mm                           |
| Surface Floor/Ground | Yes                             |
| Outdoor              | Yes                             |

Adjustable

No

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

2x6W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



### Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

38V

Power(Watts)

11,2W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

### Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz


Yes

60 Hz


Yes

Power(Watts)

9-12W

|                  |   |
|------------------|---|
| Power Factor     | 0,9   |
| Constant Current | Yes   |
| 300mA            | 30-40V  |
| IP Rating        | IP20  |
| Safety Class     |  |
| Dimmable         | No  |
| Ambient Temp     | 55°C  |
| Operating Temp   | 85°C  |
| Housing Material | Plastic   |
| Output Terminal  | Connector   |
| Brand            | Eaglerise   |
| Protection       | Short Circuit   |


#### Illumination Data

|                      |   |
|----------------------|---|
| Colour Temperature   | 3000K   |
| Lumen Output         | 2x500lm   |
| Light Efficiency     | 83,33lm/W   |
| CRI                  | 80  |
| Illumination Diagram |  |

#### Packing Info

|            |               |
|------------|---------------|
| Pcs/Carton | 4             |
| Barcode    | 5291889059738 |
| HS Code    | 9405409900    |

#### Energy Label

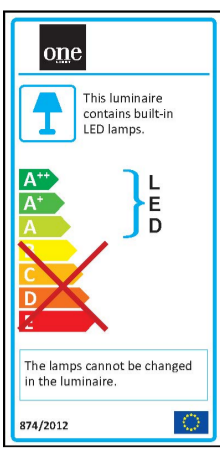

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

**one**  
LIGHT

