

21 Industrial & Floodlights > AC LED Floodlights 100-250W

## 7028CE/B/C



150W AC LED flood light with adjustable mounting bracket.

IP65 rated for outdoor use.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

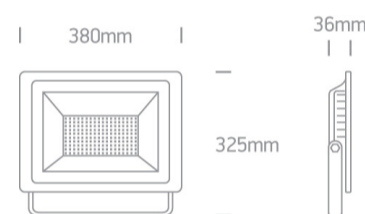



### Physical Specification


Item Group	21 Industrial & Floodlights
Family	AC LED Floodlights 100-250W
Order Code	7028CE/B/C
Colour	Black
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	380mm
Width	325mm
Height	36mm
Surface Ceiling	Yes
Surface Wall	Yes

Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction
IK Rating	7

#### Electrical Characteristics

Gear	No
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	150W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	30cm
F Mark	

#### Illumination Data


Colour Temperature	4000K
Lumen Output	13500lm
Light Efficiency	90lm/W
CRI	80
Beam Angle	110°
Illumination Diagram	

#### Packing Info

Box Length	29.5cm
------------	--------

Box Width	4.5cm
Box Height	28cm
Box Weight	3,4Kg
Pcs/Carton	4
Carton Length	41cm
Carton Width	21cm
Carton Height	32cm
Carton Weight	13,8Kg
Barcode	5291889056027
HS Code	9405409900

## Energy Label

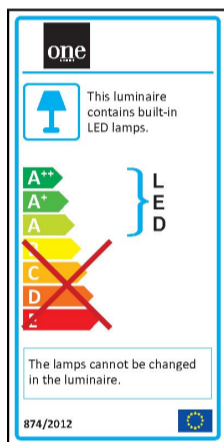

## Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to  
**one light!**

**one**  
LIGHT

