

09 LED Strips & Profiles > Connect In One Length Range 24V

7820L/EW



Flexible LED light strip, with SMD2216 LEDs, 60LEDs/meter, 4,8W/meter. Supplied in 15 meters roll with white PCB and double adhesive tape for a better fixing.

Can be cut every 10cm (6-LED segment).

Requires 24V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

Cut every 10cm
(7-LED segment)




Gallery



Accessories



7822



7824

Related items



20030

Physical Specification

Item Group	09 LED Strips & Profiles
Family	Connect In One Length Range 24V
Order Code	7820L/EW
Shape	Rectangular
Length	15000mm
Width	8mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	III
Power(Watts)	4,8W/m
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2216
LED Brand	Refond
LED Number	60LEDs/m
F Mark	F


Illumination Data

Colour Temperature	2700K
Lumen Output	312lm/m
Light Efficiency	65lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Length	25cm
Box Width	25cm
Box Height	2cm
Box Weight	0,36kg
Pcs/Carton	40
Barcode	5291889054450
HS Code	9405409989

Energy Label

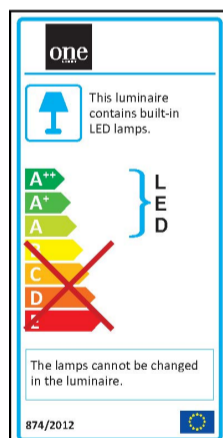

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

