


TERANG 2

outdoor wall and ceiling light, LED, 3000K, IP44, oval, white, max. 11W

A new interpretation of the classical construction luminaires for wall and ceiling mounting with a pre-installed powerful LED module. Available with housing colours of white, silver-grey, anthracite and rust, the TERANG 2 XL has frosted round glass, which guarantees homogeneous distribution of its light. With protection class IP44, this luminaire is also designed for use outdoors. Thanks to its pre-installed LED driver, the TERANG 2 is ready for direct connection to a 230V mains supply.

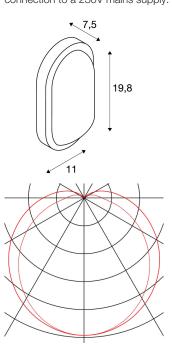

TECHNICAL DATA

| Item no.: | 229931 |
|-------------------------|--------------------------|
| Lamps included | 0 |
| Primary nominal voltage | 220-240V ~50Hz mA/V |
| Width | 19.8 cm |
| Height | 11.0 cm |
| Depth | 7.5 cm |
| Net weight | 0.462 kg |
| Gross weight | 0.554 kg |
| IP Code | IP 44 |
| Safety class | I |
| Impact resistance class | IK02 |
| Impact resistance | 0,2000000000000001 Joule |
| Assembly | Surface |
| Assembly details | Ceiling, Wall |
| Wattage | 11.0 W |
| Lumen | 680 lm |
| Colour temperature | 3000 Kelvin |
| Beam angle | 120 ° |
| CRI | >80 |
| Binning | 6 |
| Service life | 20000 h |
| BIG WHITE Page | 684 |
| | · |

| | | | | | | | 1 | | | -1 | | | 4 | | ч | | ч | -1 | 1 | 7 | 7 | 7 | 7 | 7 | 7 | ч | | | | | | | | | |
|----|-------|---|-----|----|----|----|---|---|---|----|---|----|----|---|----|---|----|----|----|---|---|----|---|---|---|---|---|----|----|----|----|----|---|---|--|
| | 4 | 4 | ٠, | ١, | ١, | ١. | ı | ı | J | 4 | J | J | J | J | a, | a | ä | J. | | | | | | | | | | | | | | | | | |
| ١. | 1 1 1 | L | . د | ı, | 1. | ١. | ı | ı | u | ā | J | a. | J | ä | J | J | | J | | | J | | 1 | | J | J | 4 | J, | J. | J. | ١, | ١, | L | 1 | |
| | | | | | | | | | а | | ú | á | J. | á | ā | ā | J. | J | J. | ä | ä | J. | ı | ı | ä | ä | á | | | | | | | | |



| Notes | | | | |
|-------|--|--|--|--|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |