



## Automatic Grill Shut-off 1-Hour Timer

Model# 3092A

**INSTALLER:** Leave these instructions with consumer.  
**CONSUMER:** Retain for future reference.

Rated up to 100,000 BTUs /  
Max temperature 125°F

**Note:** This timer can be installed horizontally or vertically. See Fig. 1-1 for horizontal setup and Fig. 1-2 for vertical setup.

Fit the Automatic Grill Shut-Off Timer in the gas supply line before the grill. The timer accommodates 1/2" NPT piping (both ends).

**Important:** Ensure you connect the gas supply to the side marked "IN" on the timer (see photo). It MUST NOT be fitted within 18" of the grill, or it will overheat, causing damage to the timer and may result in a leak.

Use pipe joint compound on male fittings attached to the timer.

To use, set the dial (turn clockwise) to the desired time to shut off. The dial is marked in 3 twenty minute increments (any position in between is an estimate of that set time). The timer dial will auto rotate (counter-clockwise) and will shut off the gas supply when the dial reaches OFF (i.e. the time is completed).

**Important:** When using the timer for periods of less than twenty minutes, you must first set the dial to 20 minutes (to activate), then return (counter-clockwise) to the desired amount of time. This will ensure proper timer operation. See Fig. 1-1 or Fig. 1-2.

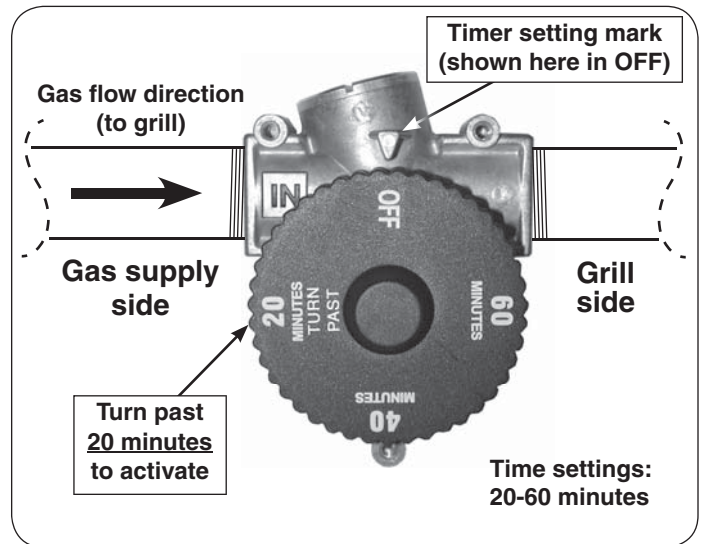


Fig. 1-1 Horizontal setup

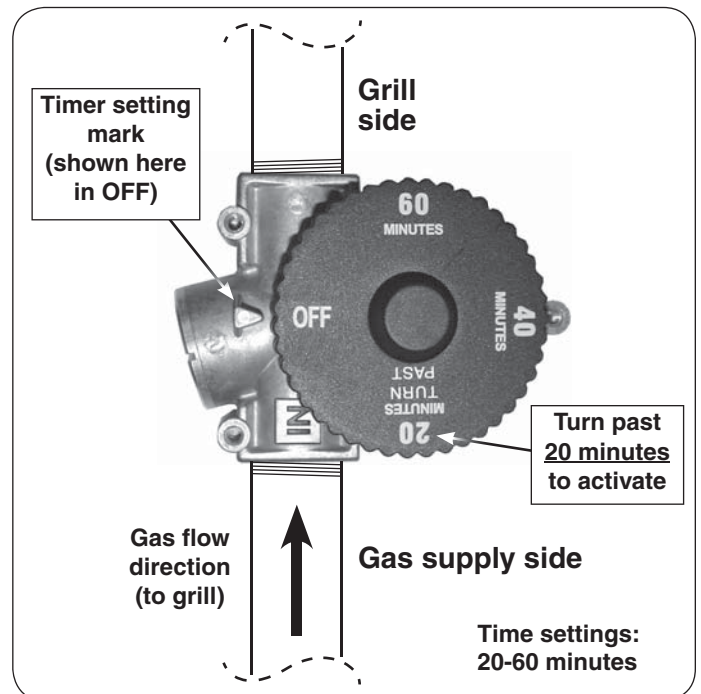


Fig. 1-2 Vertical setup