

	E660i Griddle
<b>A</b> Countertop to unit bottom <b>cutout*</b>	11 1/2"
<b>B</b> Side to side non-combustible <b>cutout*</b>	31 1/4"
<b>C</b> Front to back non-combustible <b>cutout*†</b>	23 1/2"
<b>D</b> Control panel width non-combustible <b>cutout‡</b>	33"

\* **Note:** If installing this griddle in a combustible enclosure, the correct insulating liner must be used. Consult liner instructions for counter cutout dimensions and installation.  
 † Includes any substrate at front wall of enclosure (in the area the rear of the control panel is to sit flush against). See SUBSTRATE section on next page.  
 ‡ Only applicable for non-combustible enclosures that have countertops with an overhang (see illustration and section below).

Table 3 - Cutout dimensions

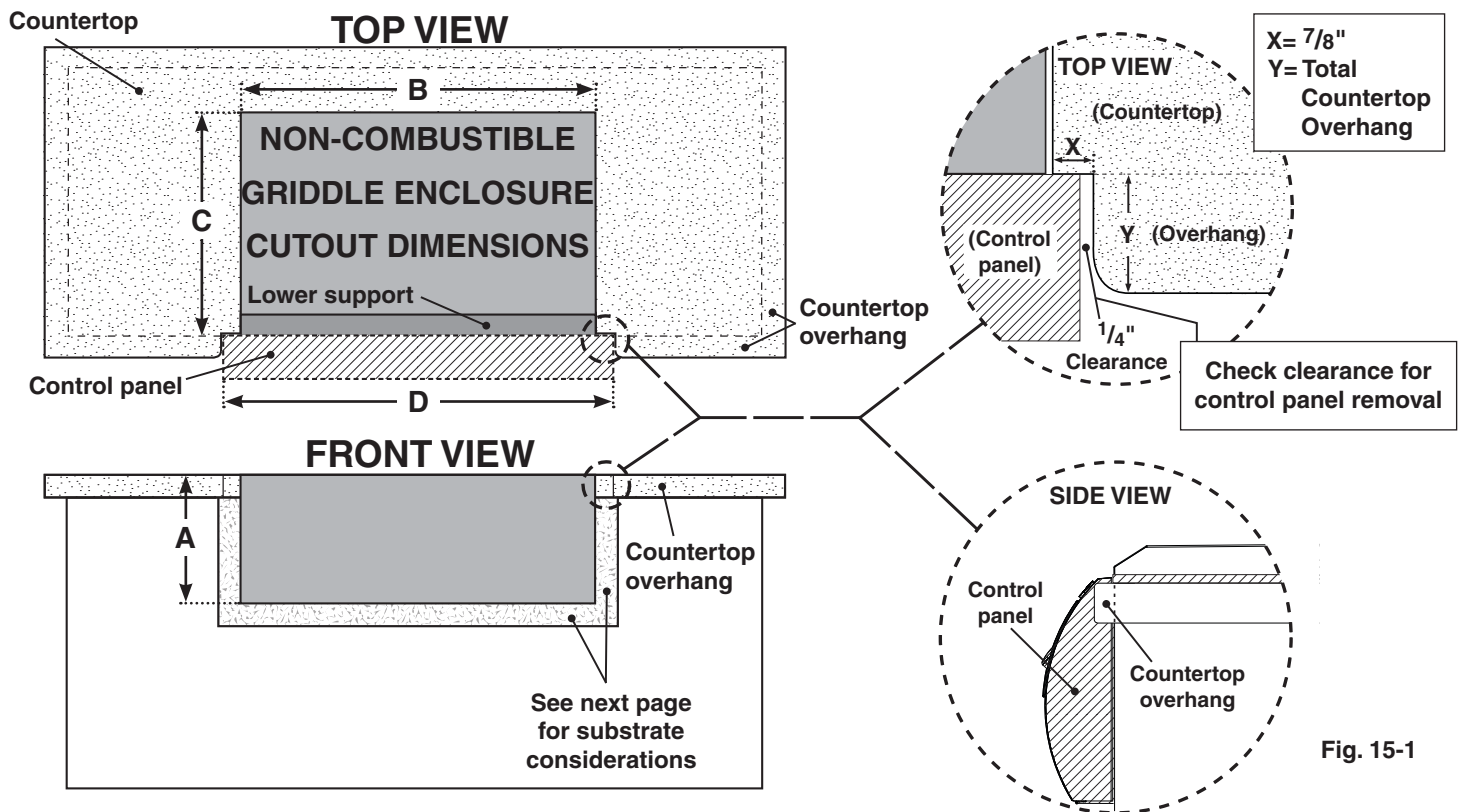


Fig. 15-1

**COUNTERTOP OVERHANG**

The control panel is designed to sit flush against the griddle enclosure front wall. If the **non-combustible enclosure** countertop extends beyond the front wall, creating a countertop overhang, it must be cut flush with the front wall for the width of the control panel or a gap will be created exposing the forward portions of the left and right side griddle fire walls. See illustrations above.

**ENCLOSURE VENTILATION**

FOR YOUR SAFETY, you must provide openings in the griddle enclosure for replacement air and ventilation (in case of possible leakage from gas connections or propane cylinders). Failure to do so may result in a fire or explosion causing property damage, bodily injury, or death. See the GRIDDLE ENCLOSURE / VENTILATION REQUIREMENTS section for details.