


Konnecta Tiles-Installation Guide →

Equipment required for Installation (Connection Pieces)





The interlocking system works using plastic insert connection pieces which are hidden under the tiles. A connector piece is placed every 20cm which is an average of 5 connectors per metre. This delivers a free floating system, which secures each tile in place without using glue.

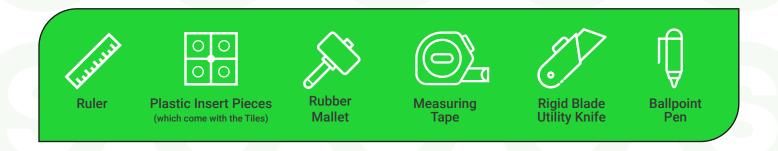















Flip the first tile upside down and push all the connector pieces into the moulded holes then position right side up approx 95cm away from the wall against the start line.




the other tiles to be in the row for pushing into the connector holes of the previous tile.



Flip the other row tiles right side up and position. Use a rubber mallet to press the connector pieces and close all joints.




Progress to the next few rows following the brick-bond pattern on both the right and left sides working towards the outer sides of the




Using a ruler, measure the remaining spaces on the outer sides where the tiles will require to be cut to fit.


Cutting the Tiles →




Measure the tiles (5-10mm longer than your measurement) and mark with a ballpoint



Hold the metal ruler in place and run the blade along the edge of the ruler.



Second pass - apply more pressure so the blade goes deeper into the initial score.



4

Third pass (if necessary)

For a visual guide on installing Konnecta Tiles, visit our tutorial guidelines HERE

Need some more help?

Give us a call on 0800 464 7115 or email us info@gym-flooring.com

Enjoy your new Sprung Floor!



Share the finished result by sending to info@gym-flooring.com

Follow us $f \odot X \rightarrow P$ in