






CAUTION


Mechanism can rise quickly with no equipment in place. User equipment must be properly installed, prior to height adjustment. Failure to do so may result in personal injury and/or property damage.


Dual Ella Parts List

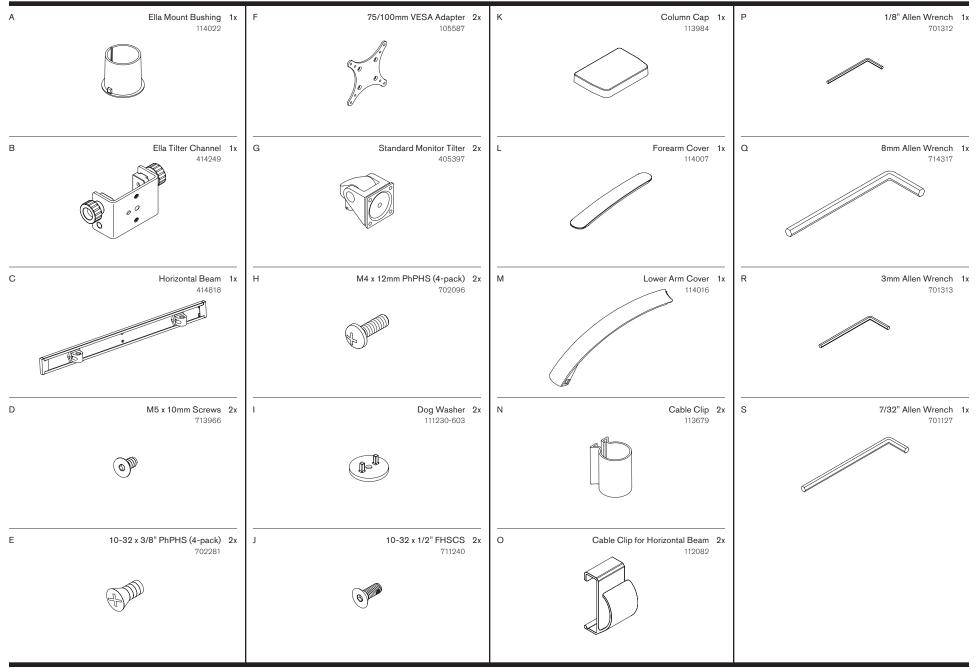

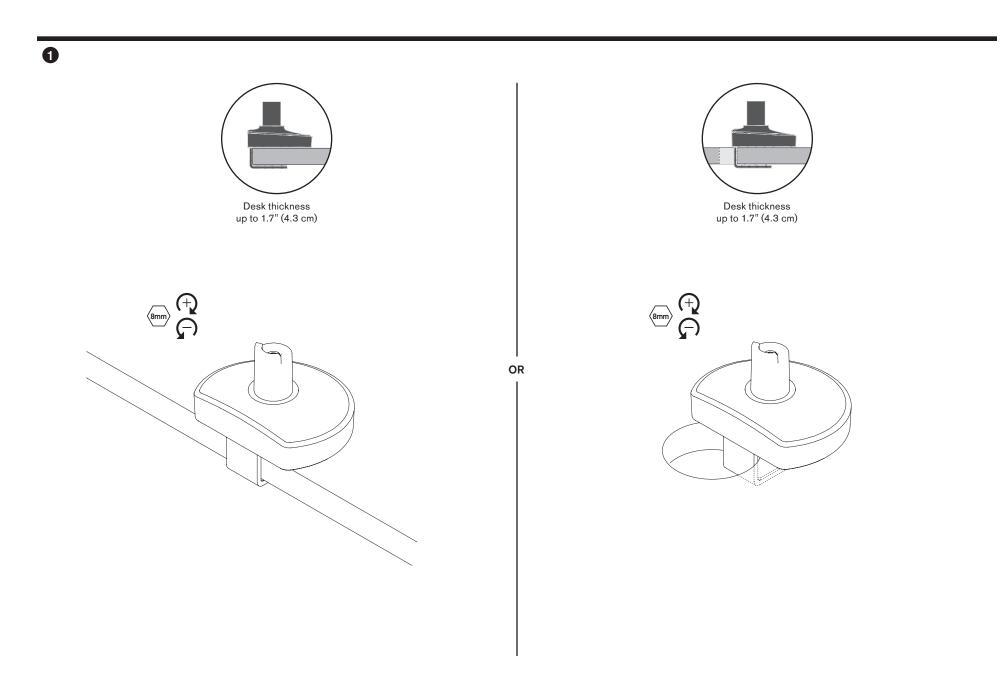

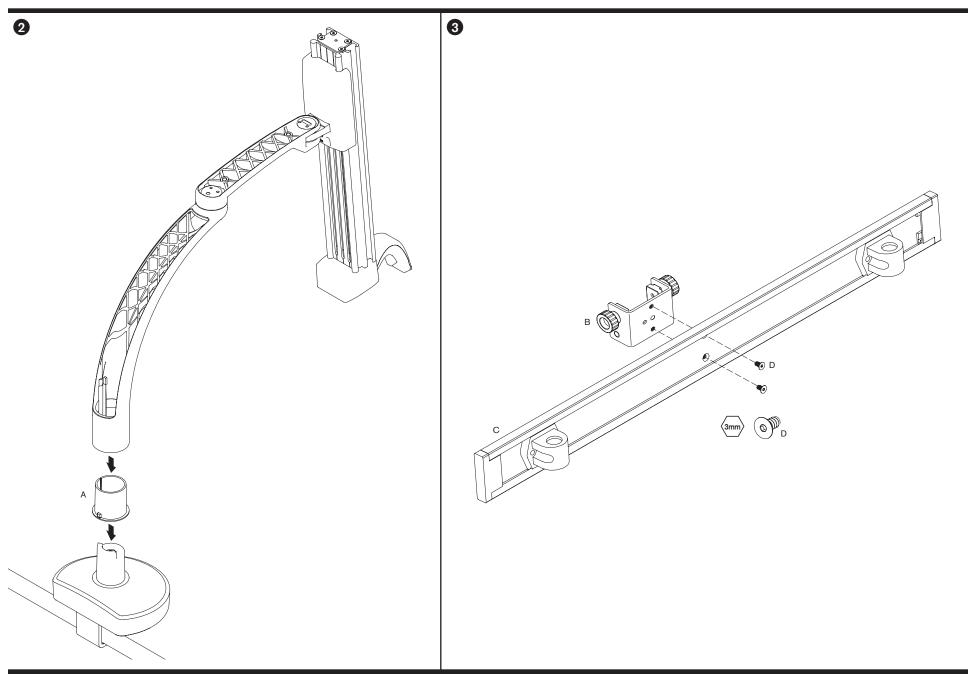


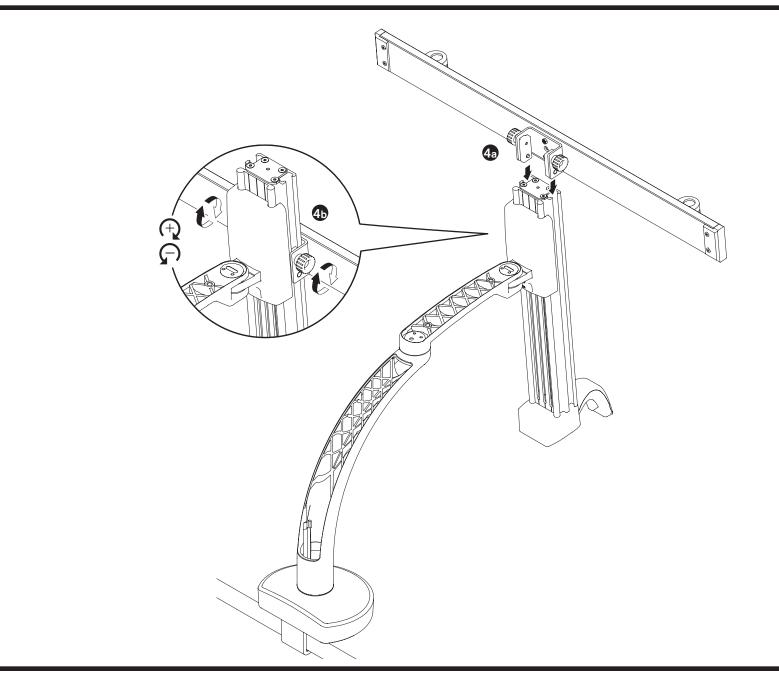


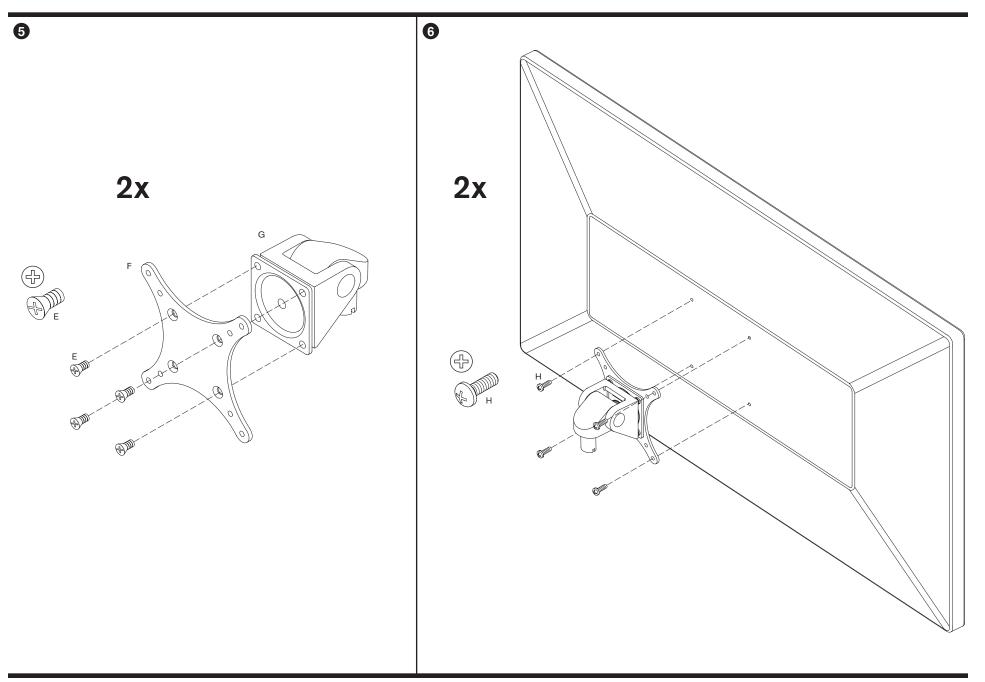

(i) Height Adjust **Monitor Weight Settings** Vertical beam must be fully raised as shown in 7a before the screw configuration is adjusted. 0 - 15 lbs 0 0 (0 - 6.8 kg) **7**a 15 - 22 lbs 0 0 0 0 or (6.8 - 9.9 kg) Press button and hold. 22 - 30 lbs 0 0 (9.9 - 13.6 kg) 1 Lift up/down. . (3mm) **7**b Release to lock in place.

7

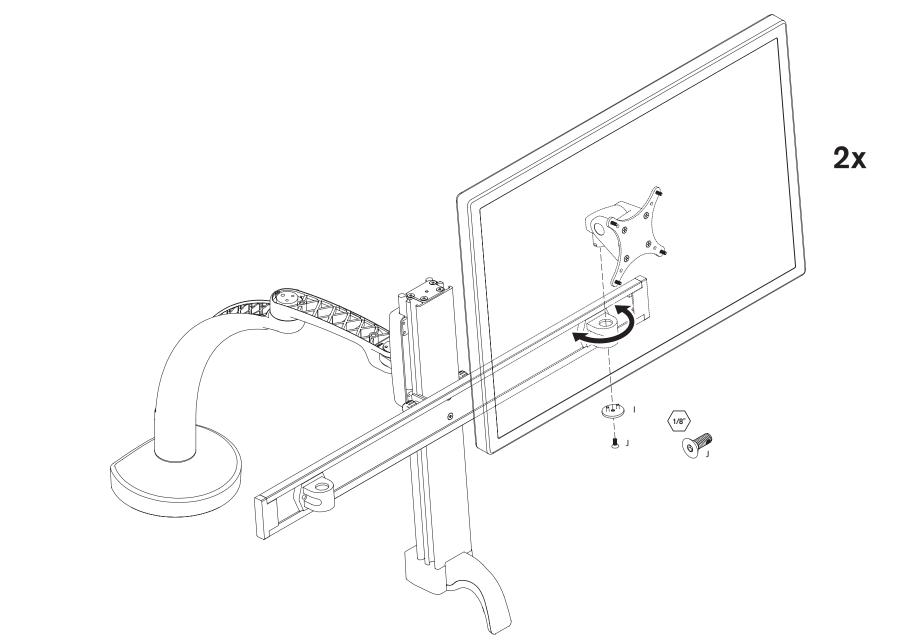

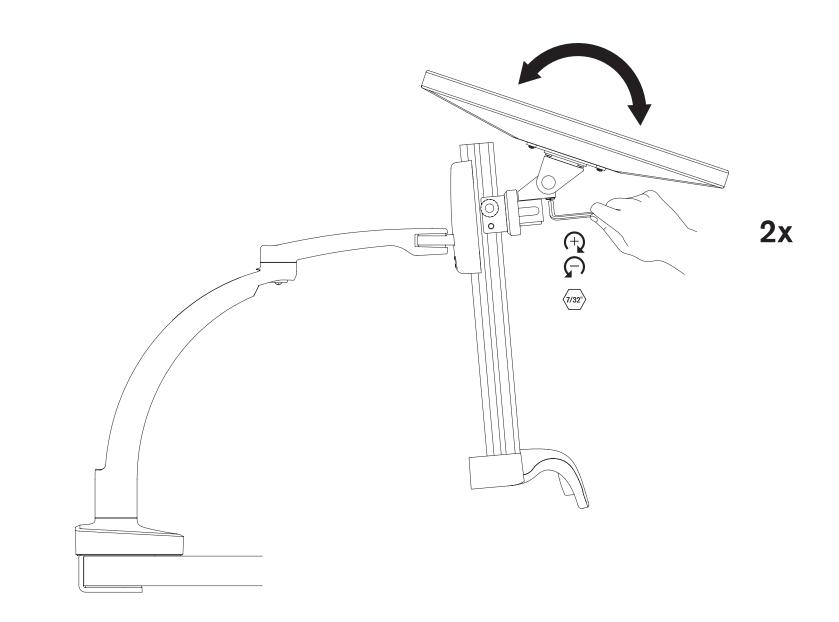

9

