

## S100SL Speaker – Datasheet





- Standard slim line 100w speaker
- Compact and easy installation
- Supplied individually
- 113.1dB output
- Durable steel assembly
- IP66 Dust and Water resistant
- Use within 12 or 24 volt siren
- Compatible with siren EM500.100 range
- 2 year warranty
- EMC/R10 compliant





## S100SL Speaker – Datasheet

#### **Description**

A 100-watt slimline standard speaker with a robust and compact structure, supplied as individual units.

### **Part Number**

ORDER	NOMINAL	FREQUENCY	IMPEDANCE	DECIBEL
CODE	POWER	RANGE		OUTPUT
S100SL	100W	N/A	8 OHM	113.1dB

#### **Technical Information**


Dimensions L x W x D (simplified)	168mm x 132mm x 54mm	
Materials	TBC	
Voltage	12v – 24v	
Rated Power	100w & 80HM	
Rated Impedance	TBC	
Resonance Frequency	TBC	
Effective Frequency Range	TBC	
Rated Frequency Range	TBC	
Sounds Pressure Level	TBC	
IP Rating	IP66	
Harmonic Distortion	TBC	
Working Environment	TBC	
Net Weight (per single speaker)	TBC	
Warranty	2 years	

## Sounds Pressure Levels (SPL) at 1W/1m





# S100SL Speaker – Datasheet

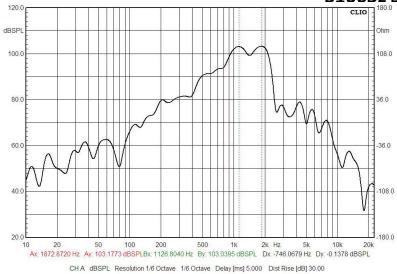

#### **Dimensions**

**Dimensions** 

