



single cables running from terminal block to the cable exit

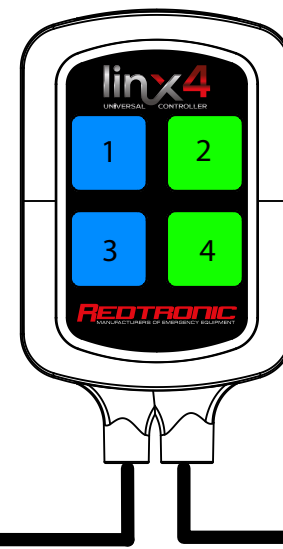

300CM

100CM

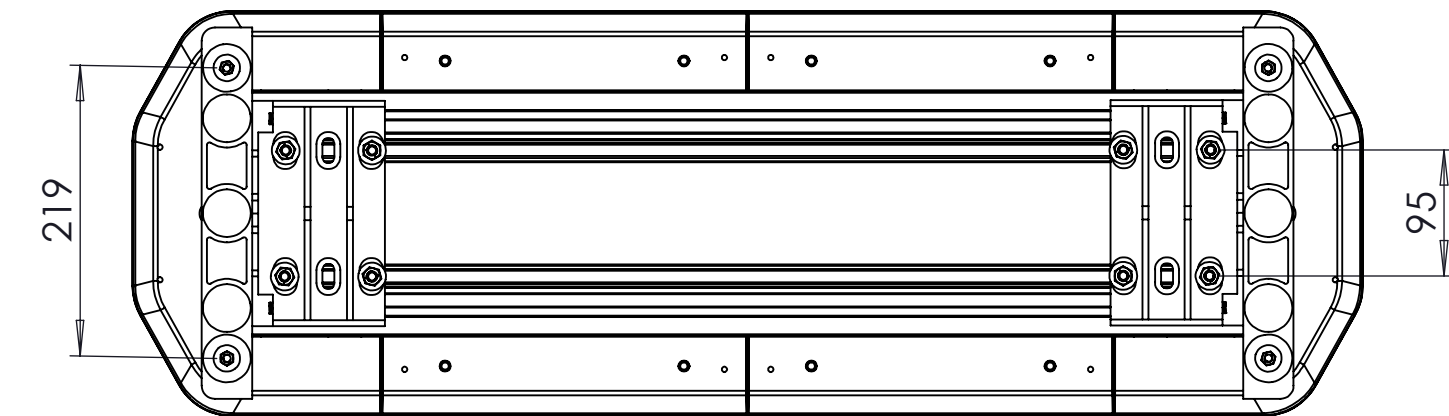


	FUNCTION	SUPPLY	TRIGGER
2mm	POWER & SIREN STANDBY	POSITIVE (+VE)	LATCHING
2mm	LIGHTS	POSITIVE (+VE)	LATCHING
1.28	SIREN TRIGGER & TONE	POSITIVE (+VE)	MOMENTARY
1.28	LIGHTS DIM MODE	POSITIVE (+VE)	LATCHING
1.28	LIGHTS PATTERN SELECT	POSITIVE (+VE)	MOMENTARY
2mm	EARTH	NEGATIVE (-VE)	LATCHING

**ADDITIONAL NOTES**

"SIREN STANDBY" TO HAVE A PERMANENT POSITIVE FEED AND THEREFORE ALWAYS BE IN STANDBY WHEN CONNECTED TO 12V (SO THE BULLHORN CAN BE POWERED AT ANY TIME).

Siren dipswitch set to 2 & 6 on (only) to provide the following:  
 "WAIL" - "YELP" - "HI/LO" - "OFF" (Dipswitch 2)  
 "BULLHORN" (Dipswitch 6)

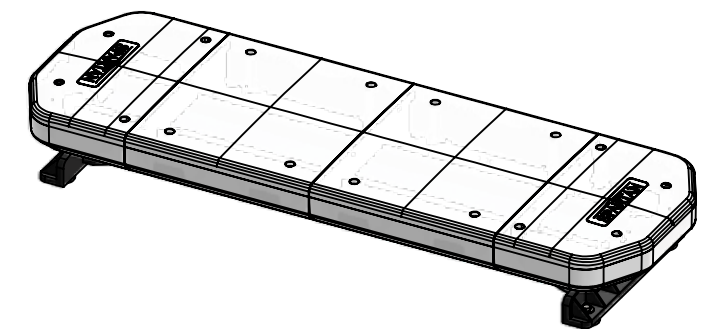

NAME		DATE	SB293TBRWCC_UV1					
DRAWN BY		A.R.				28.01.2022		
CABLE TYPE		3 metres (from exit)			LV110 - SPARTAN			
FIXING METHOD		Universal Footpack						
FLASH PATTERN		Double Alternate Flash			SIZE	A3	REV.	DWG. No.
LED Swatch					SCALE	SHEET 1 OF 1 SHEETS		
BASE LENS Swatch								
TOP LENS Swatch								