


	FUNCTION	SUPPLY	TRIGGER
2mm	POWER & SIREN STANDBY	POSITIVE (+VE)	LATCHING
2mm	LIGHTS	POSITIVE (+VE)	LATCHING
1.28	SIREN TRIGGER & TONE	POSITIVE (+VE)	MOMENTARY
1.28	LIGHTS DIM MODE	POSITIVE (+VE)	LATCHING
1.28	LIGHTS PATTERN SELECT	POSITIVE (+VE)	MOMENTARY
2mm	EARTH	NEGATIVE (-VE)	LATCHING

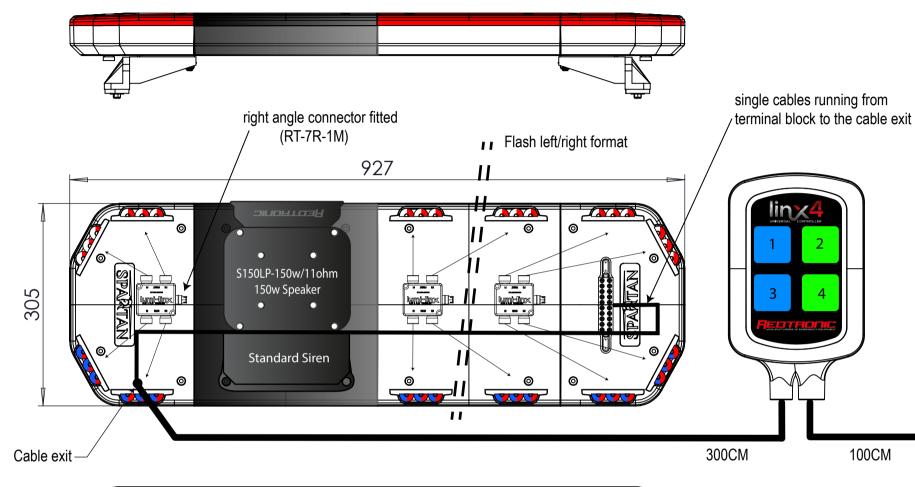


ADDITIONAL NOTES

"SIREN STANDBY" TO HAVE A PERMANENT POSITIVE FEED AND THEREFORE ALWAYS BE IN STANDBY WHEN CONNECTED TO 12V (SO THE BULLHORN CAN BE POWERED AT ANY TIME).

Siren dipswitch set to 2 & 6 on (only) to provide the following; "WAIL" - "YELP" - "HI/LO" - "OFF" (Dipswitch 2) "BULLHORN" (Dipswitch 6)

REV (AR) 19.01.2022

512

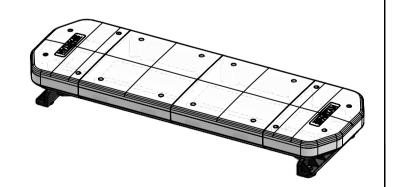

	NAME	DATE	٥	D'	202TE		I I\/1
DRAWN BY	A.R	23.11.21 (REV 28.01.22)	SB293TBRWCR_UV1				
CABLE TYPE	3 metres (from exit)		1 \/11		0 -	SPAF	NATS
FIXING METHOD	Universal Footpack		LV110 - SPARTAN				
FLASH PATTERN	Double Alternate Flash		SIZE A3	RE\	/ .	DWG. No.	
LED Swatch BASE LENS Swatch TOP LENS Swatch			SCALE	SHEET 1 OF		1 SHEETS	

