
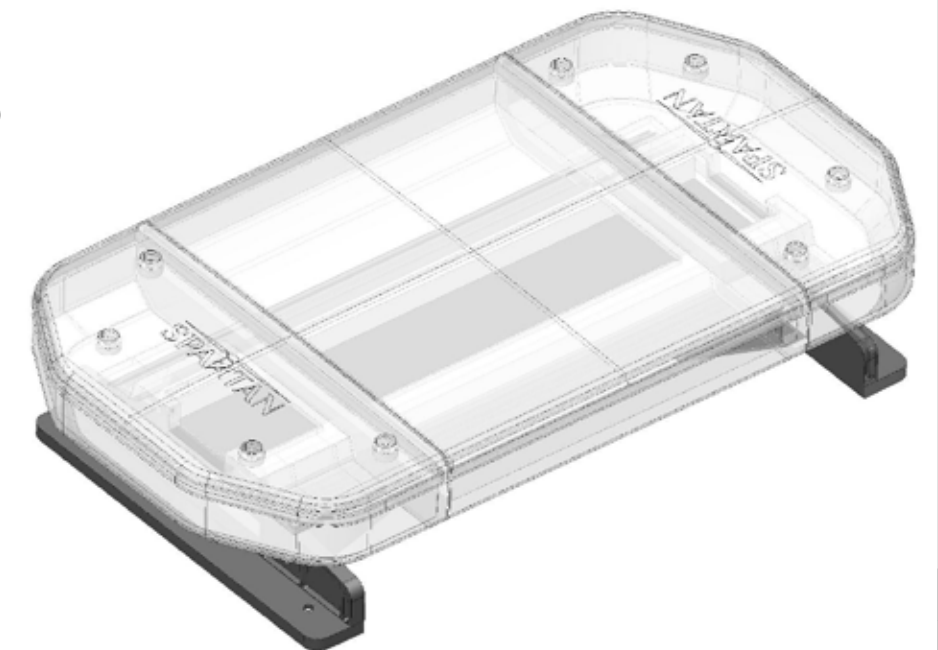


	FUNCTION	SUPPLY	TRIGGER
2mm	SIREN STANDBY	-	-
2mm	LIGHTS	POSITIVE (+VE)	LATCHING
1.28	SIREN TRIGGER	POSITIVE (+VE)	MOMENTARY
1.28	LIGHT DIM MODE	POSITIVE (+VE)	LATCHING
1.28	PATTERN SELECT	POSITIVE (+VE)	MOMENTARY
2mm	EARTH	NEGATIVE (-VE)	LATCHING

ADDITIONAL NOTES

"SIREN STANDBY" TO HAVE A PERMANENT POSITIVE FEED AND THEREFORE ALWAYS BE IN STANDBY WHEN CONNECTED TO 12V (SO THE BULLHORN CAN BE POWERED AT ANY TIME).

Siren dipswitch set to 2 & 6 on (only) to provide the following:
 "WAIL" - "YELP" - "HI/LO" - "OFF" (Dipswitch 2)
 "BULLHORN" (Dipswitch 6)

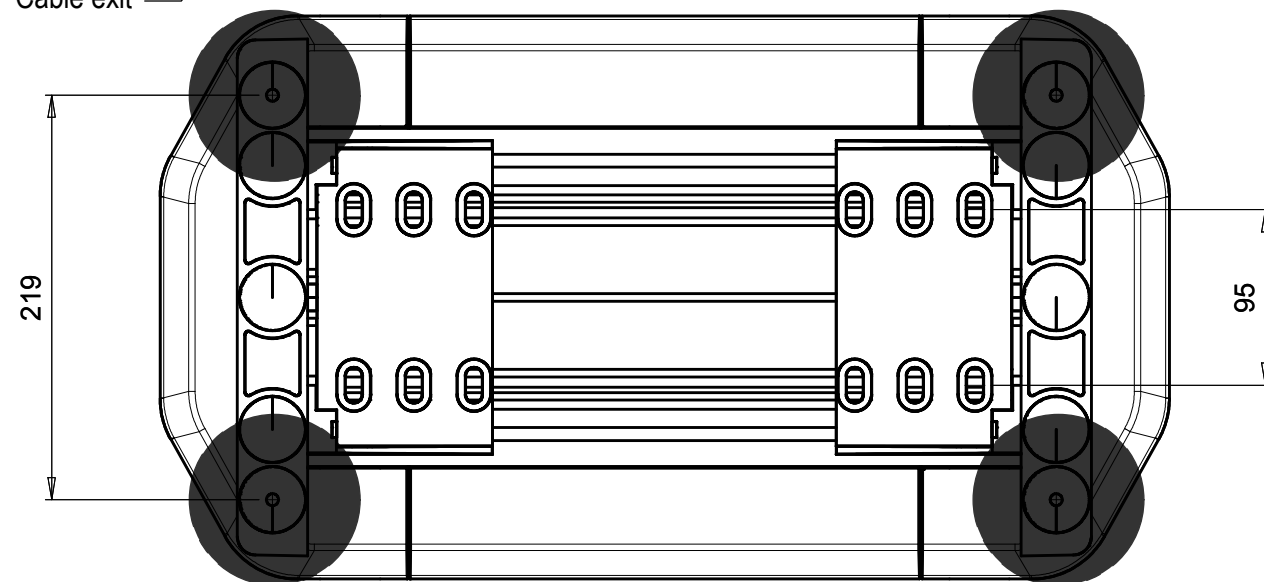

NAME		DATE	SBX55TBRWCRIN4S0M_V1		
DRAWN BY	A.R	01/12/2022	LV55 - SPARTAN		
CABLE TYPE	3 metres (from exit)		SIZE	REV.	DWG. No.
FIXING METHOD	Mag Mount & Lanyard		A3		
FLASH PATTERN	Double Alternate Flash		SCALE	SHEET 1 OF 1 SHEETS	
LED Swatch	■ ■ ■	LENS Swatch	■ ■ □		