





W02	Z11
2NC Slow Action	1NC/1NO Snap Action



FTNG140: Adjustable Ø50 rubber roller lever

FTNG	1	40	X11	-
Series	Function	Head and actuators	Contact Types	Thread dimension of lead exit
	1 - Without Reset Function	40 - Adjustable Ø50 rubber roller lever	W02 - 2NC Slow Action Z11 - 1NC/1NO Snap Action	N - 1/2NPT
Slow Action & Snap Action: Type "Zb"				

OPERATION DIAGRAMS

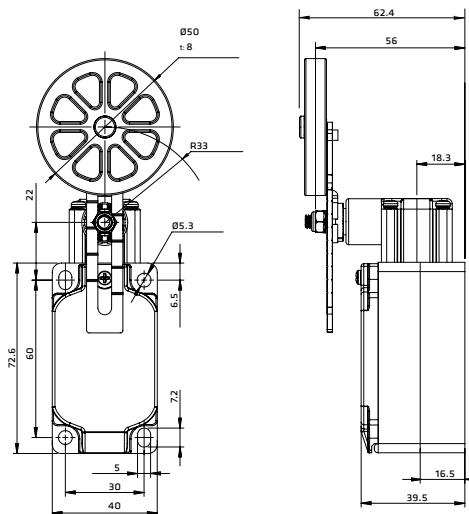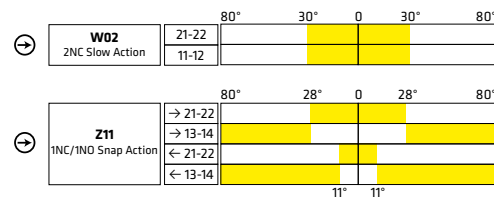

C FTNG SERIES 40 MM THERMOPLASTIC LIMIT SWITCHES



DESCRIPTION

The **FTNG series** 40 mm thermoplastic limit switches, conform to EN 50047, have been developed to provide a range of options including a various choice of snap acting and slow acting and a wide range of actuator heads.

The **FTNG series** offers the option of rotating the head in 90° increments before installation to allow ease of mounting.


The dimensions of this line comply with the indications of EN 50041.

Giovenzana limit switches can be used in various applications in automation, lift and handling system fields.


The **FTNG series** is particularly suitable for heavy applications, thanks to its solidity and reliability.

Operations of these limit switches is achieved by the sliding action of the guard or other moving objects should not pass completely over the switch and allow the plunger or lever to return to its original position.

TECHNICAL DATA - HOUSING

Made of glass- reinforced polymer, self-extinguishing, shock-proof thermoplastic resin and with double insulation	
FTNG Series one threaded conduit entry	Standard: M20
Protection degree	IP67 according to EN60529 with cable gland having equal or higher protection degree

GENERAL DATA

Positive opening operation	NC contact 
Utilization category	AC15, A600, B600, A300 (for contact block type)
Minimum admissible current	5V, 5mA, DC
Insulation resistance	100MΩ min (DC 500V)
Contact resistance	25mΩ max (Initial)
Max switching speed	250 mm/s
Max switching frequency	6000 operation per hour
Enclosure material	UL approved glass-filled polybutylene terephthalate
Roller Material	Metal, PA, rubber
Operating temperature	Min -25°C (-18°F) / Max 80°C (+176°F)
Mechanical life expectancy	1x10 ⁷ cycles min
Electrically life expectancy	150.000 cycles min
Vibration resistance	IEC 68-2-6, 10-55Hz ± 1Hz, Excursion: 0.35mm, 1 octave/min
Conduit entry	Various
Fixing	2xM4

ELECTRICAL DATA

Rated thermal current (Ith)	10A
Rated insulation voltage (Ui)	600V AC
Rated impulse withstand voltage (Uimp)	2500V AC
Pollution degree	3
Protection against electric shock	Class II (Double insulation)


STANDARDS & APPROVALS

Standards	EN60947-5-1, EN50047, EN1088
Approvals	cULus, EAC and CCC for all applicable directives

QUALITY MARKS




MAIN FEATURES

- Conforms to EN (TUV) standards corresponding to the CE marking.
-  Positive opening operation of NC (Normally Closed) contacts conforming to IEC/EN 60947-5-1.
- Double insulation makes ground terminal unnecessary.
- Wide standard operating temperature range: -25°C to 80°C.
- Full range of actuator heads and levers suitable for safety applications.
- Sealing up to IP67.
- Wide switch variations (Snap action and slow action basic switches).

ACCORDING TO STANDARDS

- EN81.20** Safety contacts according to EN60947-5-1.
- EN81.50** Protection degree higher than IP4x. Mechanical endurance higher than 1x10⁶ cycles.

INSTALLATION FOR SAFETY APPLICATIONS

Use only switches marked with the symbol . Always connect the safety circuit to the **NC contact** (normally closed contacts: 11-12 / 21-22 / 31-32) as required by **EN ISO 14119 paragraph 5.4** and as stated in the standard **EN81.20 paragraph 5.11.2.2.1**.



TAKE CARE!

If not expressly indicated in this chapter, for the correct installation and utilization of all articles see the instructions given on pages 92-93.

DATA TYPE APPROVED BY UL

Utilization categories:

FTNG SERIES	Q300	A600	
		1 NC/1 NO Slow Action	2 NC Slow Action
		B600	
		1 NC/1 NO Snap Action	
		A300	
		2 NC/1 NO Slow Action (3 poles)	
		3 NC Slow Action (3 poles)	

Data of the housing type 1.

For all contact blocks use 60 or 75°C copper (Cu) conductor and wire size No. 14 - 18 AWG.

Terminal tightening torque of 7.1 lb in (0.8 Nm).

In conformity with standard: UL508, CSA 22.2 No. 14 - 10.




Please contact our technical service for the list of approved products.


PROTECTION CLASS

IP67 Designed to be used even in the most severe environmental situations, these devices pass the immersion test IP67 in conformity with EN 60529.

DOUBLE INSULATION

 Materials of group II, according to IEC 536, are made with double insulation. This consists of doubling the insulation capability by means of an additional divider in order to eliminate any electrical shock risk and avoid the need for any additional protections.

POSITIVE OPENING

 A limit switch complies to the specification when all the normally closed contact elements of the switch can be changed, with certainty, to the open position (no flexible link between the moving contacts and the operator of the switch, to which an actuating force is applied). Positive opening doesn't apply to NO contacts. Control switches with positive opening operation can be equipped with either slow-break or snap action contacts. In order to use different contacts on the same switch, it is necessary to electrically separate them; otherwise only one contact can be used. Every positive opening control switch must be marked on the external housing with the symbol on the left.