


Jackson Rectangle Polished Edge Mirror Includes Mirror Demister



Note: All dimensions are in millimetres (mm)

Stock Code	Size (mm)	Shape	Edge
JS1590GTD	1500 x 900 x 5	Rectangle	Polished Edge

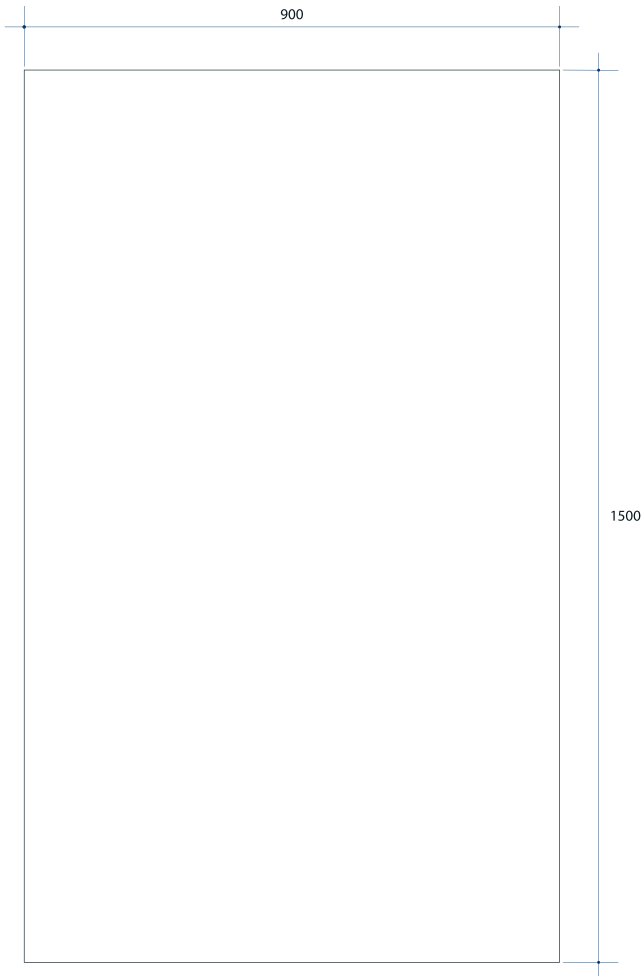


This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.

Thermomirror Mirror Demister


Ultra-thin Demister Pad for use on Bathroom Mirrors

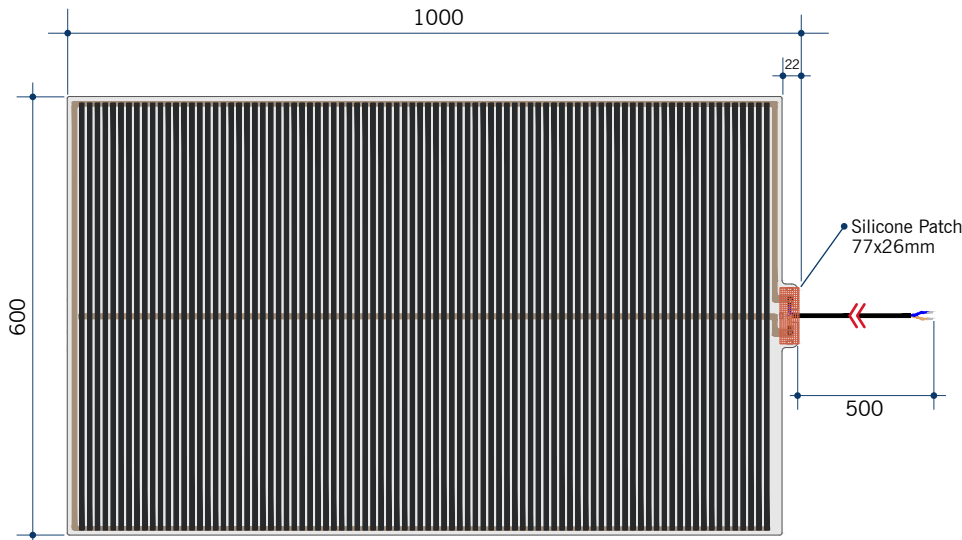

Note: All dimensions are in millimetres (mm)

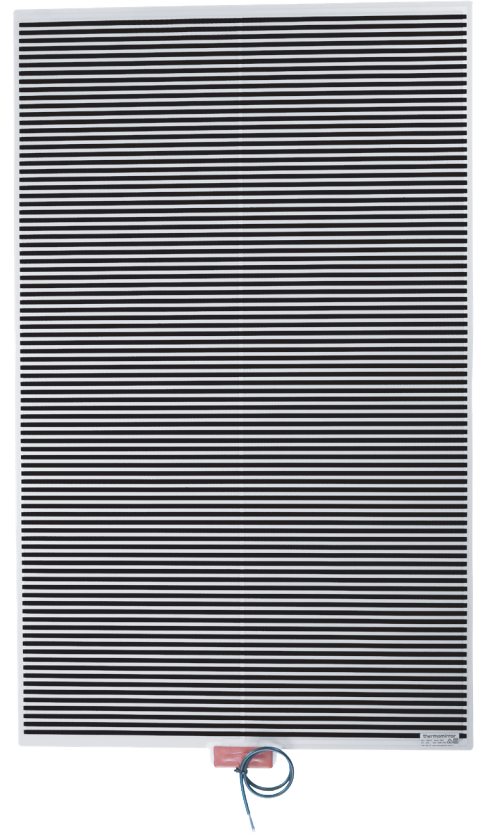


Stock Code	Size (mm)	Heat Output (W)	Voltage - Frequency
TM6010	600 x 1000	145	220 - 240V 50Hz



Thermomirror demisters must be installed by a qualified electrician.
The demister cannot be cut, pierced or modified in anyway.

Jackson Rectangle Polished Edge Mirror Includes Mirror Demister

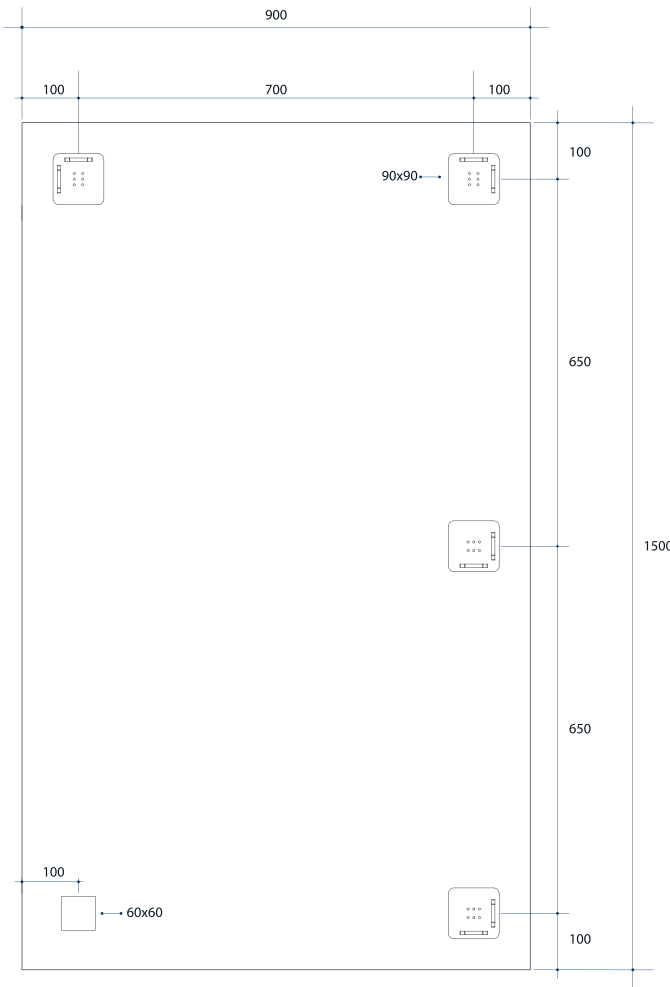

Note: All dimensions are in millimetres (mm)



Stock Code	Size (mm)	Shape	Edge
JS1590HND	1500 x 900 x 11	Rectangle	Polished Edge




This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page

Please note: Bracket location may vary +/- 5mm. DO NOT pre-drill holes for mounts before confirming exact locations on your mirror. Measurements and diagrams are to be used as a guide only.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.

Thermomirror Mirror Demister


Ultra-thin Demister Pad for use on Bathroom Mirrors

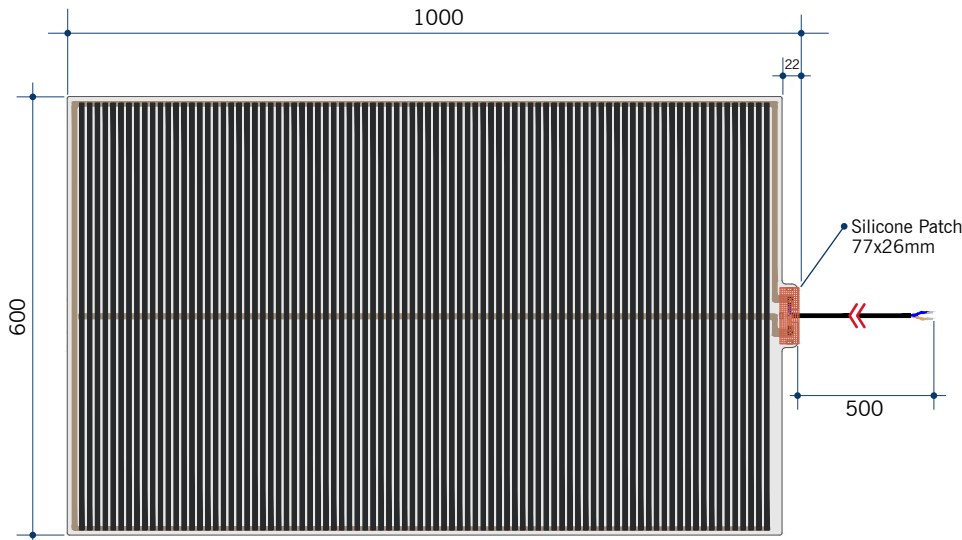

Note: All dimensions are in millimetres (mm)

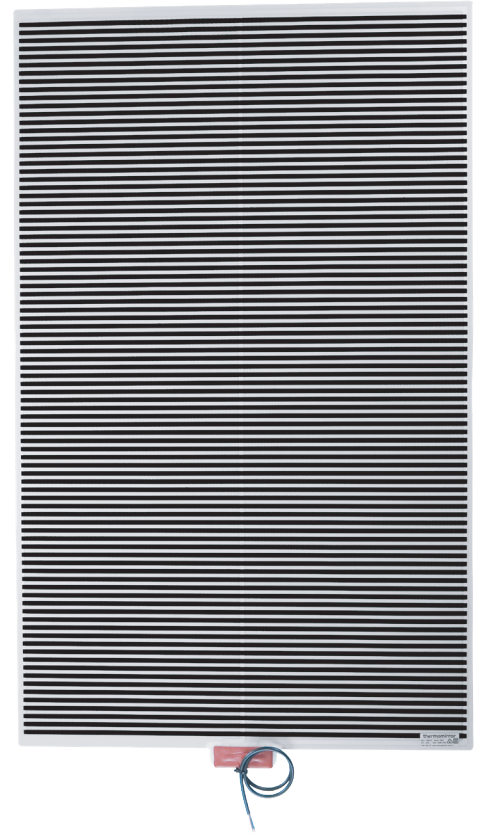

Stock Code	Size (mm)	Heat Output (W)	Voltage - Frequency
TM6010	600 x 1000	145	220 - 240V 50Hz



Thermomirror demisters must be installed by a qualified electrician.
The demister cannot be cut, pierced or modified in anyway.