
Jackson Rectangle Polished Edge Mirror Includes Mirror Demister



Note: All dimensions are in millimetres (mm)

Stock Code	Size (mm)	Shape	Edge
JS9075GTD	900 x 750 x 5	Rectangle	Polished Edge



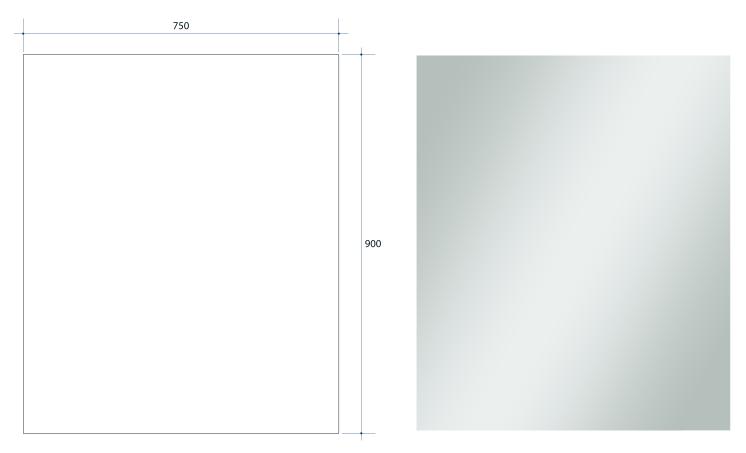









This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror.

For details on the demister, please see next page.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.






Thermomirror Mirror Demister

Ultra-thin Demister Pad for use on Bathroom Mirrors

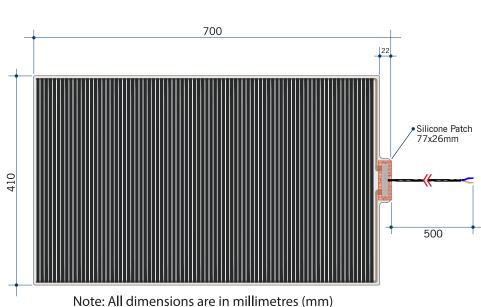

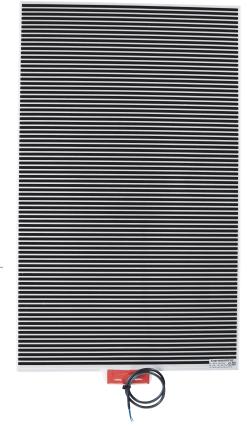

Stock Code	Size (m	Size (mm)		Output (W)	Voltage - Frequency	
TM4170		410 x 700		60	220 - 240V 50Hz	
TO VEAR WARRAND	240V	IP(1N BATHROOMS	O.6MM	Some State of the Control of the Con	
















Thermomirror demisters must be installed by a qualified electrican. The demister cannot be cut, pierced or modified in anyway.





Jackson Rectangle Polished Edge Mirror Includes Mirror Demister

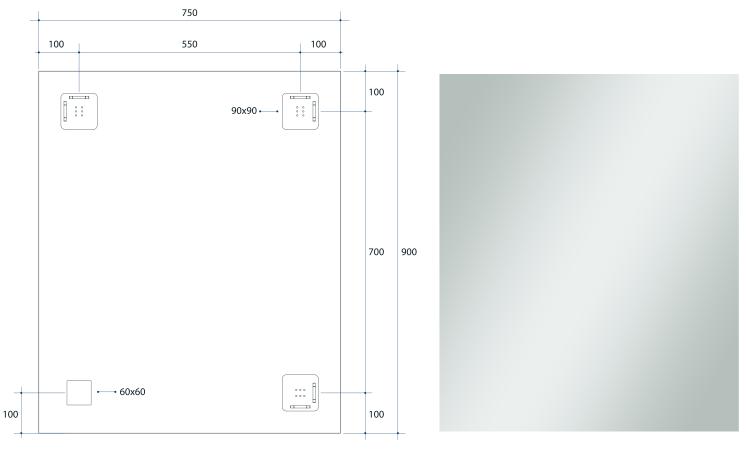

Note: All dimensions are in millimetres (mm)

Stock Code	Stock Code Size (mm)		Shape		Edge	
JS9075HND		x 750 x 11	Rectangle		Polished Edge	
OR LANDSCAPA	ETY BACKING A	OFR-FREE MID	NEARS WARR	COR EASY INC.	, UDES DEMIO.	













This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page

Please note: Bracket location may vary +/- 5mm. DO NOT pre-drill holes for mounts before confirming exact locations on your mirror. Measurements and diagrams are to be used as a guide only.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.






Thermomirror Mirror Demister

Ultra-thin Demister Pad for use on Bathroom Mirrors

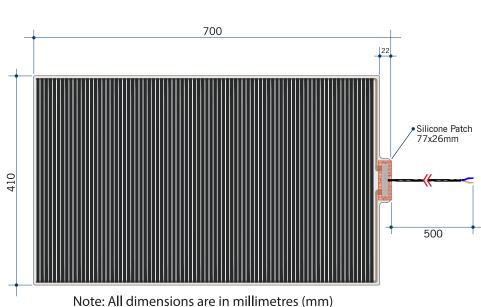

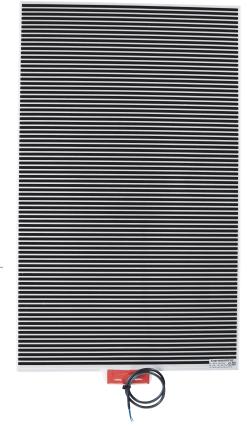

Stock Code	Size (mm)		Heat Output (W)		Voltage - Frequency	
 TM4170	410 x 700		60		220 - 240V 50Hz	
SEN YEAR WARRAND	HARDWIRING ONLY	SELFOR USE	IN BATHROOM	PAD THICKNESS	SIMECTION THICKNESS	



















Thermomirror demisters must be installed by a qualified electrican. The demister cannot be cut, pierced or modified in anyway.



