
Rio Round Polished Edge Mirror Includes Mirror Demister

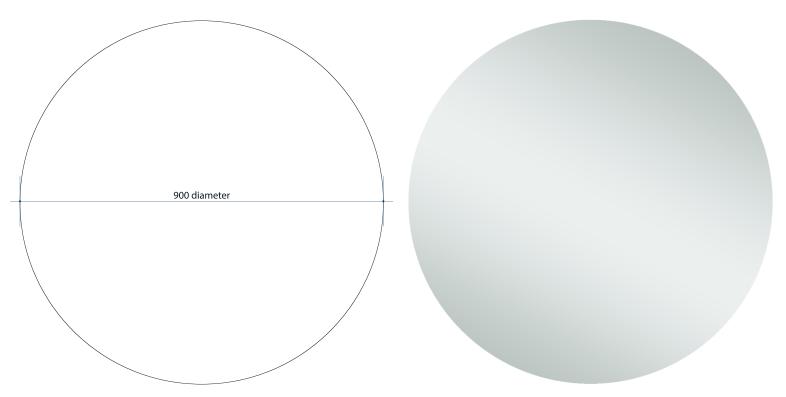

Note: All dimensions are in millimetres (mm)

Stock Code	Size (mm)	Shape	Edge
RR9090GTD	900Ø x 5	Round	Polished Edge
SMM THICK MIRROR 5MM 5MM	ACKING FILM	THO YEARS WARRAND	TO-WALL

This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.





Thermomirror Mirror Demister

Ultra-thin Demister Pad for use on Bathroom Mirrors

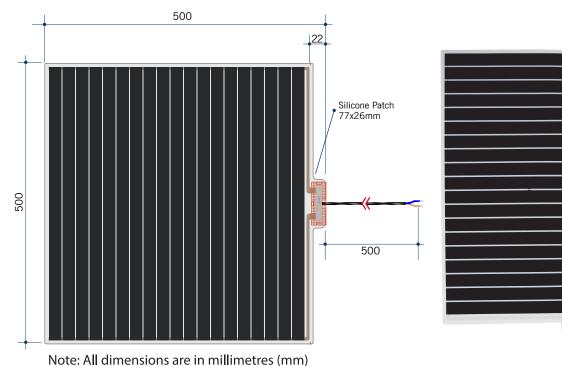



Stock Code Size (mm) Heat Output (W) Voltage - Frequency TM5050 500 x 500 55 220 - 240V 50Hz EN YEAR WARRAN HARDWIRING ONL FOR USE IN BATHE ECTION THICA ING PAD THICA SHE. P64 240 0.6MM 5.5MM MAX TEMPERATUR ULLY SELF-ADHES DOUBLE INSULATE WIRING LEAD NADE IN EUROP, 35-40°(← 500MM →


> Thermomirror demisters must be installed by a qualified electrican. The demister cannot be cut, pierced or modified in anyway.





Technical Datasheet

Rio Round Polished Edge Mirror Includes Mirror Demister

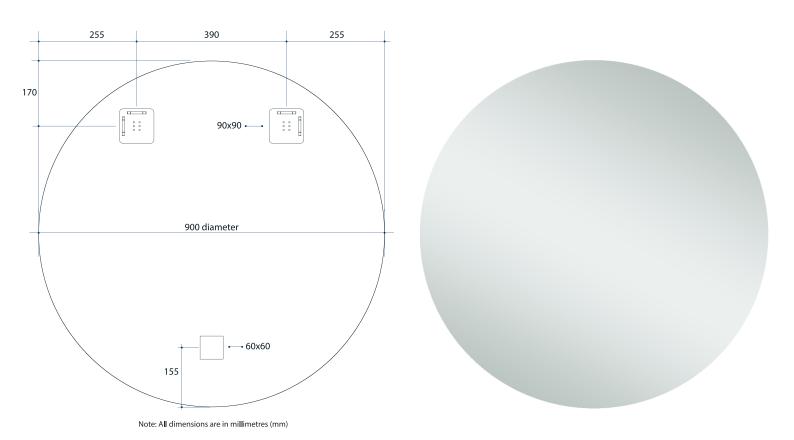

Stock Code	Size (mm)	Shape	Edge
RR9090HND	900Ø x 11	Round	Polished Edge



This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page

Please note: Bracket location may vary +/- 5mm. DO NOT pre-drill holes for mounts before confirming exact locations on your mirror. Measurements and diagrams are to be used as a guide only.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors.





Thermomirror Mirror Demister

Ultra-thin Demister Pad for use on Bathroom Mirrors

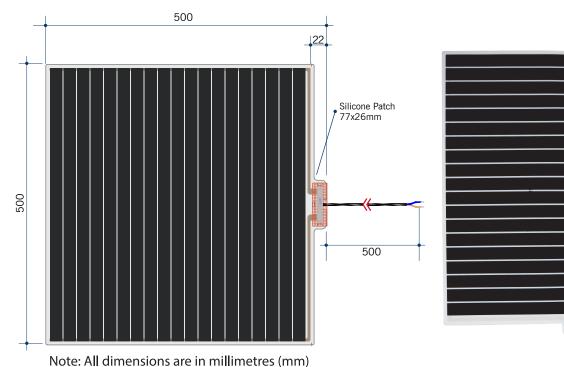



Stock Code Size (mm) Heat Output (W) Voltage - Frequency TM5050 500 x 500 55 220 - 240V 50Hz EN YEAR WARRAN HARDWIRING ONL FOR USE IN BATHE ECTION THICA ING PAD THICA SHE. P64 240 0.6MM 5.5MM MAX TEMPERATUR ULLY SELF-ADHES DOUBLE INSULATE WIRING LEAD NADE IN EUROP, 35-40°(← 500MM →

> Thermomirror demisters must be installed by a qualified electrican. The demister cannot be cut, pierced or modified in anyway.



