


SPA FIRESENSE-RESPONSE ELECTRICAL SYSTEM WIRING SCHEMATIC APPLIES TO ALL ELECTRIC MODELS

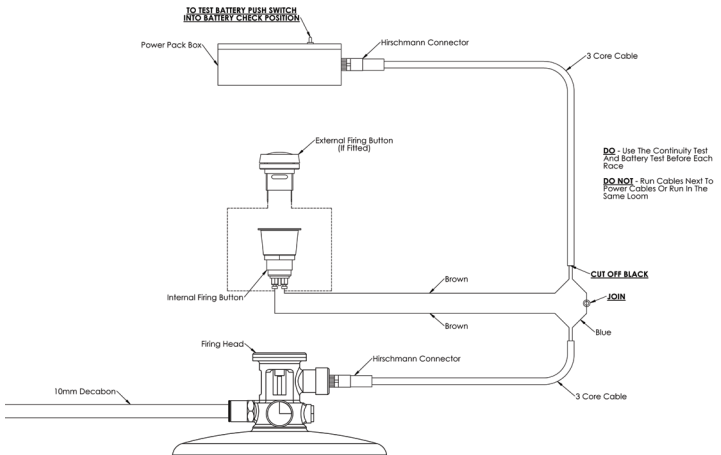

- To test the battery, push and hold control box switch upwards in the "Battery Check" position until yellow light flashes.
- If the extinguisher tubing is to be removed, push the black collet in and pull the tubing out at the same time.

RECOMMENDED: Use the continuity test and battery test before each race.

DO NOT: Run the cables next to power cables, or in the same loom.