



FACE FITTING TUBULAR MOTOR ROLLER SHUTTER

SPECIFICATION
- 575 mm Curved Solid lath in 22swg galvanised steel
- 50 x 50mm full height galvanised steel supporting angles welded to steel head plates
- 100mm 16swg motor barrel assembly with lost bobbin dummy end
- L or T section galvanised steel bottom rail
- 240volt single phase tubular motor
- Internal manual override facility
- 305mm Squared flagplates
- Safety Brakes are a required feature is the Shutter is used as an access point/Pedestrian walkway.

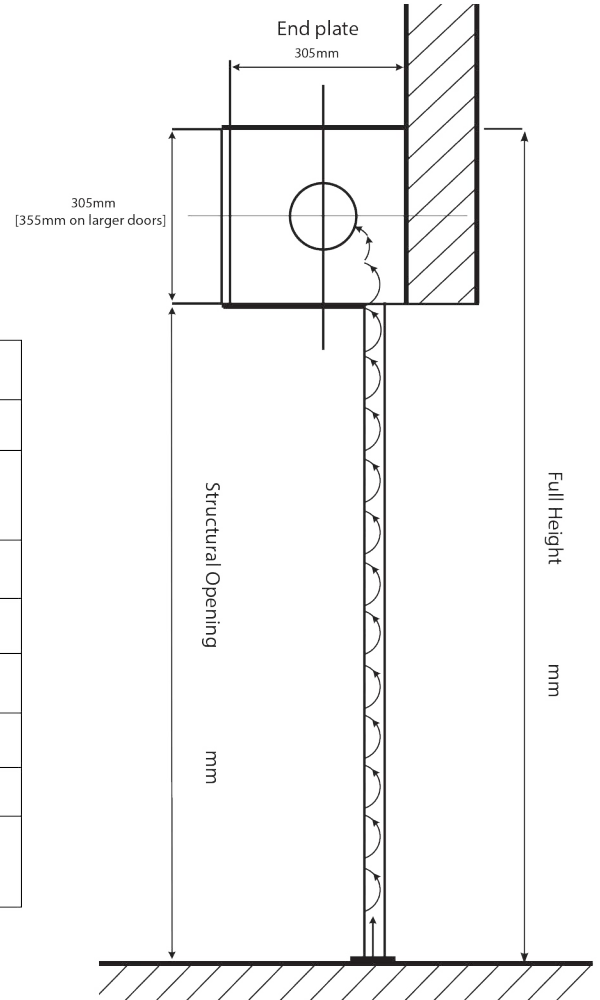

ELEVATION

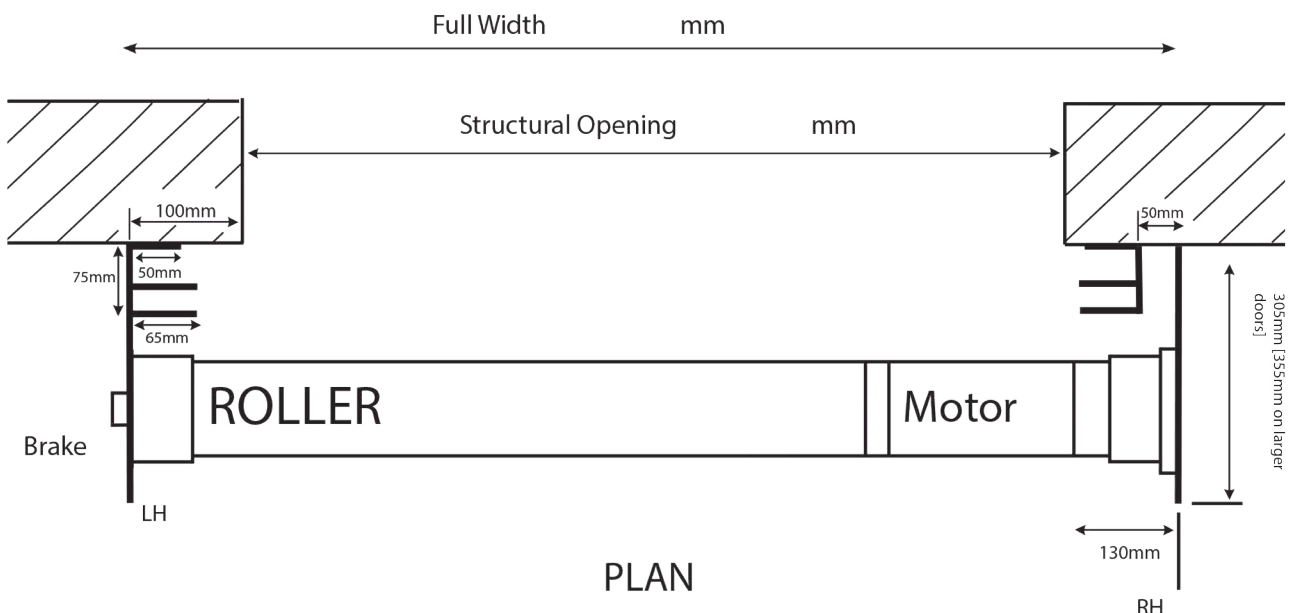

PLAN

FIT BETWEEN TUBULAR MOTOR ROLLER SHUTTER

SPECIFICATION

- 575 mm Curved Solid lath in 22swg galvanised steel
- 50 x 50mm full height galvanised steel supporting angles welded to steel head plates
- 100mm 16swg motor barrel assembly with lost bobbin dummy end
- L or T section galvanised steel bottom rail
- 240volt single phase tubular motor
- Internal manual override facility
- 305mm Squared flagplates
- Safety Brakes are a required feature is the Shutter is used as an access point/Pedestrian walkway.

