

RETENSIONING INSTRUCTIONS FOR YOUR CARDALE *MAXI-MIZER* DOOR



IMPORTANT INFORMATION

1. Before proceeding oil all pivot points.
This may prevent the need for re-tensioning.
2. **CAUTION:** THE SPRINGS ARE UNDER TENSION - FOLLOW THESE INSTRUCTIONS CAREFULLY TO AVOID PERSONAL INJURY.
3. Eye protection must be worn.
4. Do not attempt to adjust the spring tension if you are unsure of any of the points below
5. Keep children away from the door whilst spring adjustments are being made.

These instructions must be retained by the householder.

Occasional adjustment of spring tension may be required to maintain smooth door operation.

1 Open door fully and secure safely in the open position.

2 Remove both springs from spring hangers on one side only.

3 Move lower spring anchor assembly up or down to adjacent hole as required. Up reduces tension, down increases tension.


4 Re-fit springs.

NEVER MOVE SPRING POSITION MORE THAN ONE HOLE WITHOUT TESTING THE EFFECT ON DOOR OPERATION.

5 Repeat operations 1 to 4 on other side

6 Ensure both sides are balanced (i.e. spring anchor assembly is in same hole on both sides.)

7 Release and test door operation.

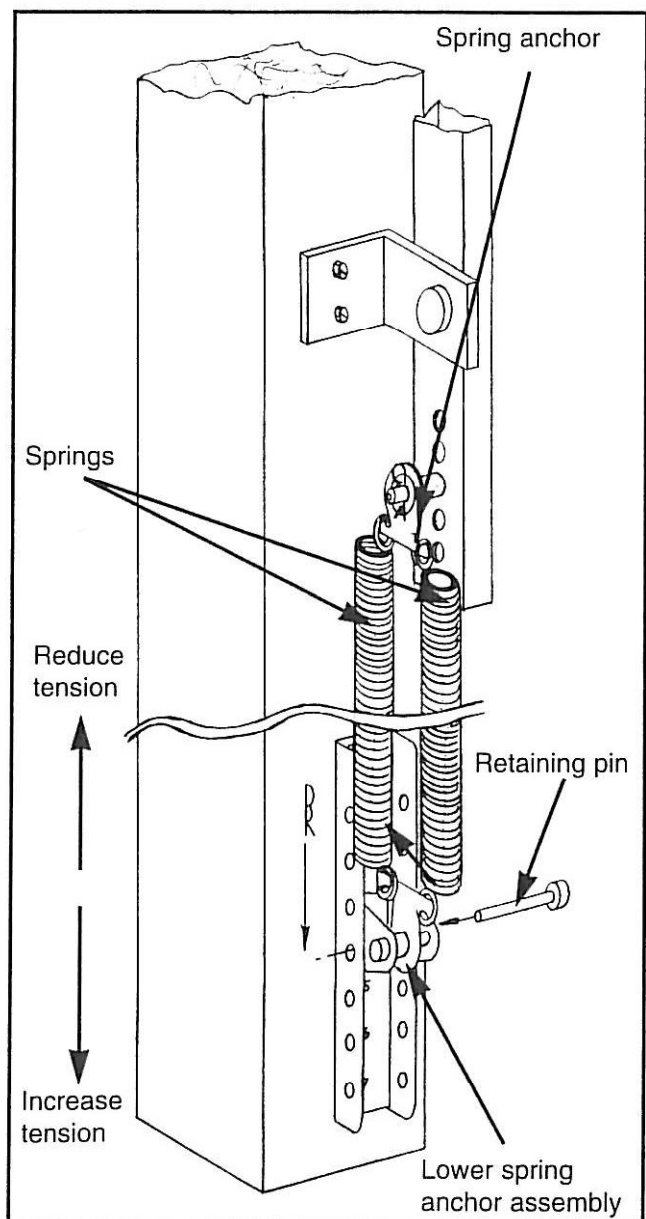

In the event of difficulty please contact your local Cardale Agent.
See Yellow Pages for details.