


# Geberit AquaClean Alba WC complete solution, wall-hung WC

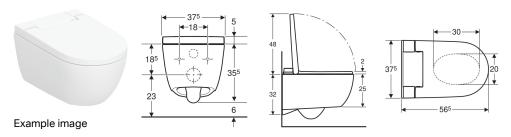

## Application purposes

- For convenient toilet use
- ٠ For gently cleaning the anal area with water

## Characteristics

- ٠ Water heating by storage water heater
- ٠ Anal shower with WhirlSpray shower technology
- Spray intensity can be set to five different levels ٠
- Shower water temperature can be adjusted via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App
- · Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water •
- Descaling programme
- Rimless WC ceramic appliance featuring TurboFlush flush technology ٠
- Washdown WC
- User detection
- WC seat ring and WC lid with soft-closing mechanism •
- WC lid with SoftOpening
- · Functions can be controlled remotely
- Compatible with Geberit Home App
- · Water supply connection on the left, hidden behind the WC ceramic

#### Scope of delivery

- Water supply connection set for Sigma and Omega concealed cisterns Sound insulation set
- 12 cm, installation height 112 cm
- · Female socket for mains connection

- Remote control with wall-mounted case and battery CR2032
- Fastening material

# To order additionally

· Geberit straight connector with sleeve and cover caps

Art. no.	Colour / surface	В	н	т	Protection class	Power consumption	
146.350.01.1	WC ceramic appliance: white / KeraTect Design cover: white	37.5 cm	40.5 cm	56.5 cm	I	850 W	New

# Accessories

· Reinforced braided hose with ball valve for Geberit AquaClean Alba / Sela

- · Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

#### Technical data

Protection degree	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption standby max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Calculated flow rate	0.02 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Spray time	20 s
Load WC seat max.	150 kg