


TECHNICAL DATA SHEET

Thermostatic Shower Mixer With Riser Rail Kit

Product Code	
Construction	Brass Body (CuZn38Pb18) Zinc alloy Handle
Finishes	Matt black
Product Type	Contemporary
Water Pressure	Min. 0.5 bar, Max. 6.0 bar
Plumbing Systems	Suitable for all plumbing systems, preferably balanced Min. supply pressure differential requirement is 5:1
Standards	Complies with BSEN 1111
Certification	WRAS approved and certified (2010080), manufactured to comply with TMV2
Cartridge	Thermostatic
Fitting	Easy fit
Packaging	76 x 43 x 35cm / carton (4 boxes), Dimension: 74 x 41.5 x 8cm / box; Weight: 5.25Kg / box
Guarantee	10 years against manufacturing faults (excluding serviceable parts)
Additional Information	<ol style="list-style-type: none"> 1. Temperature: Pre-set 38°C, with push button override to 48°C 2. Automatic shut off in the event of hot or cold water supply failure 3. Shower head : ultra slim stainless steel 200mm 4. Shower handset : Matt black , ABS 5. Shower hose : 1.5m, PVC 6. Stainless steel telescopic adjustable height riser rail

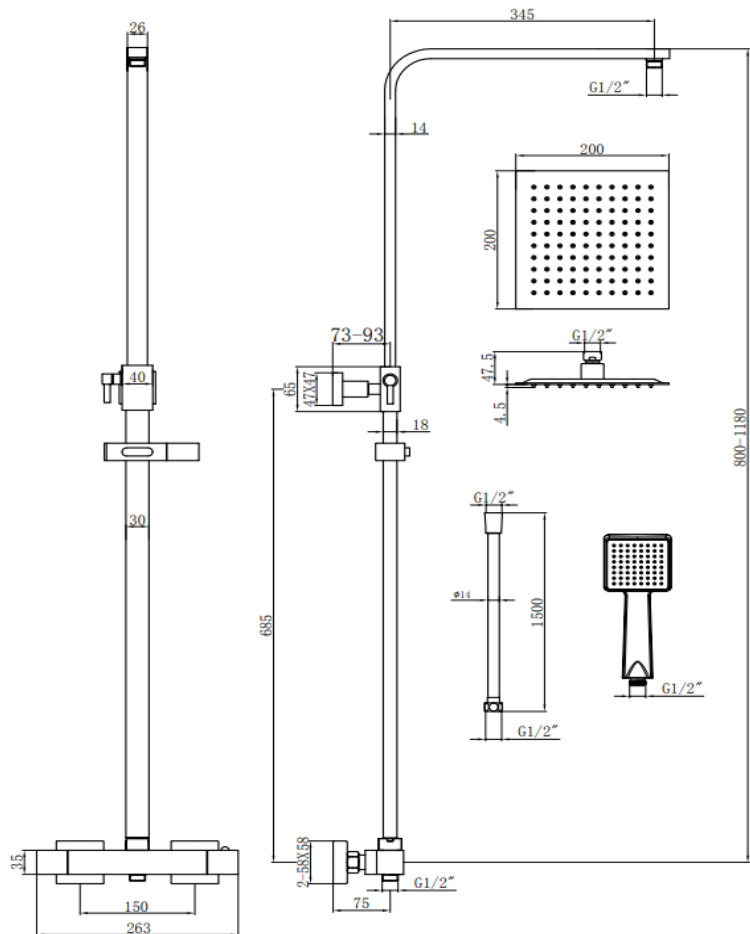

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
AVSH103K	6.0	-	-	8.5	12.0	14.5	18.5	22.0	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.