

Trittico[®] M



 dual mode
SYSTEM

*for gelato and
premium ice-cream production*


trittico[®]



Easy and fast

Trittico[®] Mechanic produces gelato and premium ice-cream in an easy and fast way, maintaining strict hygiene conditions and in compliance with HACCP regulations.



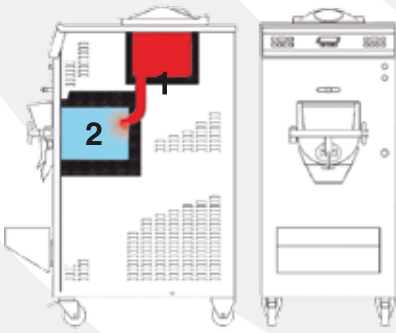

Description

Trittico® Mechanic is an extremely reliable machine, designed to be easy to use. The uniqueness of Trittico® comes from its special structure: made of one upper vertical tank (no. 1 in the picture), where the pasteurization begins, and one lower horizontal tank (no. 2 in the picture), where the pasteurization phase is completed and the mixture is frozen. The two independent tanks can work simultaneously with the advantage for the artisan to carry on two different processes at the same time. In fact, while the mixture is freezing, it is possible to start a new production cycle, that means the pasteurization of a new product. Other advantages: the two tanks are connected through a patented internal conduit without external contacts, that guarantees the utmost hygiene of the products and their absolute quality, by avoiding any external environment contamination. Thanks to its small dimensions the table top model can be easily placed in every production site and kitchen.

Technical features

- Makrolon® front door (special thermal insulating material)
- Three-blade stainless steel mixer with interchangeable scrapers (2 blades for 18 models)
- Automatic washing system (not available for table top models)
- Automatic temperature control thanks to advanced thermoregulators with "sensible touch" displays
- Patented internal connection between upper and lower tank

Advantages and strengths

- Extremely easy to use
- Easy mixture loading
- Ingredients can be added during each heating or freezing phase
- Thermal shock due to fast temperature decrease from 85°C to 4°C, allowing the highest hygiene of the mixture
- Short freezing time
- Fast gelato extraction system
- Extremely easy to handle and clean
- Consumption saving machine



Slanting front panel with rounded anti-drip upper edge. Thermo-regulator with "sensible touch" display



Manually dismantlable door for a perfect and fast cleaning




Detail: interchangeable metal scraper



Probe in direct contact with the mix



Table top model

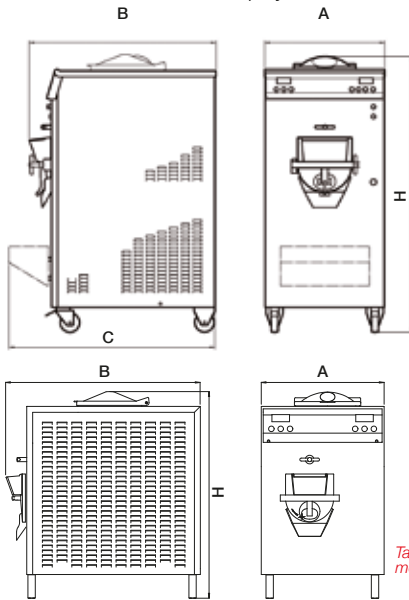

TECHNICAL SPECIFICATIONS

		18*	30	50	60	120					
Prod. for cycle	Lt	3	5	7	10	20					
Average hourly production *1	Lt	12/18	20/30	30/45	40/60	75/120					
Voltage	Volt Hz/Ph	230/60/3	230/60/3	230/60/3	230/60/3	230/60/3					
Power	kW	5,3	5,8	6,3	9	18,6					
Refrigeration condenser *2		Water	Air	Water	Air+Water	Water	Air+Water	Water	---	Water	---
Width (A)	cm	50	50	51	51	51	61	61	---	61	---
Depth (B)	cm	79	79	80	97	95	95	95	---	115	---
Depth (C)	cm	---	---	87,5	103,5	102,5	102,5	102,5	---	122,5	---
Height (H)	cm	78	78	140	140	140	140	141	---	144	---
Weight *3	kg	117	---	140	---	291	---	329	---	451	---

(*1) Table top model. Dual mode system not available.

*1 Hourly production may change accordingly to type of mixture and finished product density.

*2 Water or Air: cooled system self contained. Air+Water: cooled system self contained.

*3 The weight of the air cooled machines will be estimated before the shipment.

Rev. 1015 Data can be changed at any time without notice by the manufacturer.