

# PERSONAL PROTECTIVE EQUIPMENT



**HEAD**  
PROTECTION



**EYE**  
PROTECTION



**FALL**  
PROTECTION



**FOOT**  
PROTECTION

# ABOUT US

Established in 1990 Continental Manufacturing Co. was set up to produce high precision components for automotive sector. After successfully working in the manufacturing segment it was observed that awareness of safety standards and use of right equipment was not satisfactory. Also high quality PPE's were not easily available.

Thus CMC gave birth to its baby 'HEAPRO' to make each life fear free from accident at workplace especially while working at height. With requisite experience in sheet metal & plastics HEAPRO PPE's were introduced to make each individual so confident that working at height becomes his passion.

HEAPRO is a name of prominence, reliability and trust in the market of personal protective equipments. For over a decade now HEAPRO is a leading brand manufacturing specialized equipments for every personnel working at higher altitudes.

With advanced architecture and buildings getting taller all HEAPRO equipments go through rigorous testing procedures while manufacturing so as to achieve ZERO DEFECT.

HEAPRO Safety equipments Manufacturing facilities are located at Rewari, Haryana. Head, face and Hearing protection equipments are manufactured at plastic moulding unit I located in sec-3 IMT Bawal. Fall Protection and other products are manufacture in unit II, located in sector 14 IMT Bawal.

Our team of experienced professionals is constantly innovating ideas for making safety equipments ideal and comfortable for use.

At HEAPRO we strive to provide you the best and will, continue to do so.

## INDEX


### HEAD & FACE PROTECTION

<b>SAFETY HELMETS</b>	01-05
• HEAPRO VENTRA SERIES	01
• HEAPRO STANDARD SERIES	01
• HEAPRO ELECCELI	02-03
• HEAPRO VENTRA VYZ	04-05
<b>SAFETY EYEWEAR</b>	06
<b>WELDING &amp; FACE SHIELDS</b>	07

### FALL PROTECTION

<b>SAFETY HARNESS</b>	8-17
• SAFETY HARNESS (HI-32)	8
• SAFETY HARNESS (HI-36)	9
• SAFETY HARNESS (HI-40)	10
• SAFETY HARNESS (HI-41)	11
• SAFETY HARNESS (HI-112 A)	12
• SAFETY HARNESS (AN-10)	13
• SAFETY HARNESS (AN-20)	14
• SAFETY HARNESS (AN-30)	15
• SAFETY HARNESS (HI-40)	16
• HEAPRO MAINTENANCE & WINDOW CLEANING KIT	17
<b>FORKED LANYARDS</b>	18-21
• TWIN TAILED ELASTIC (HI-742 KE)	18
• TWIN TAILED WEBBING (HI-722 KE)	19
• TWIN TAILED WEBBING (HI-AL-722 KE)	19
• TWIN TAILED POLYAMIDE ROPE TYPE (HI-702 SE D)	20
• TWIN TAILED BRAIDED ROPE TYPE (HI-682 KE)	20
• TWIN TAILED BRAIDED ROPE TYPE (HI-AL-682 KE_01)	21
• TWIN TAILED BRAIDED ROPE TYPE (HI-AL-682 KE_02)	21
<b>HOOKS &amp; CONNECTORS</b>	22-23

CMC is QMS certified company as it has a base to manufacture sub-assemblies for automobile O.E.M.'s. The safety products are manufactured by following the same system as for automotive and conforming to BIS, CE and ANSI norms. At HEAPRO all products go through rigorous testing stages to make sure that each equipment is strong and safe.

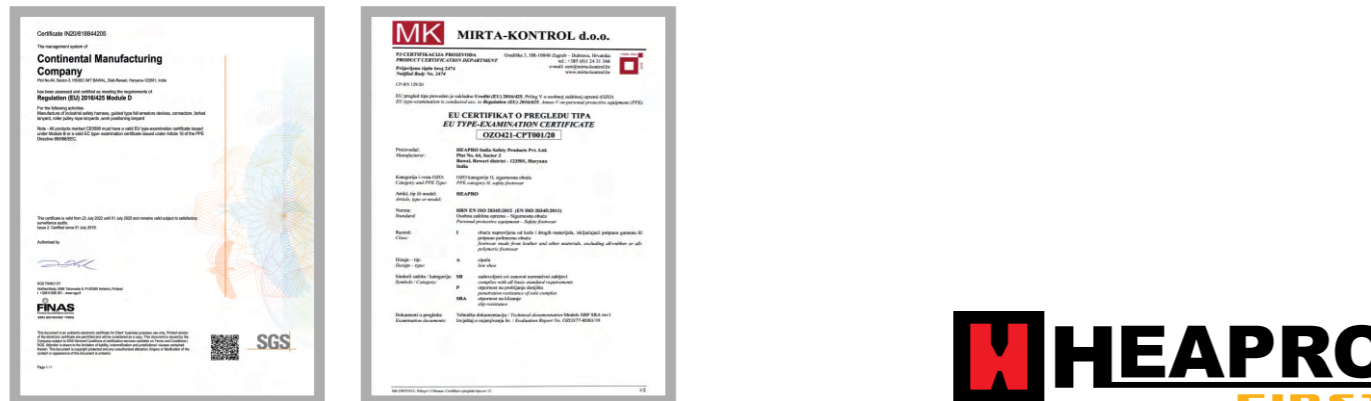

Made from special grade high density PE  
 Light weight yet strong to ensure extended working hours  
 Available in smart vented & unvented designs  
 Louvers for cross ventilation in Heapro Ventra series  
 Cushion pad for wearer's comfort  
 Available in Pin Lock & Ratchet Design  
 Skin Friendly Sweat Pad, Chin Strap & Cushion Pad  
 Four point suspension  
 Conforms to IS:2925-1984



## HEAPRO VENTRA SERIES

Product Code	Model	Description
VLD-0011	VENTRA LD	Pin lock type plastic harness with HDPE shell
VR-0011	VENTRA LDR	Ratchet type plastic harness with HDPE shell
VY-0011	VENTRA LDY	Y strap pinlock type plastic harness with HDPE shell

### Colours Available :



You can customize with Your own text and/or Logo. Printing / sticking is Possible on the front and side of the helmet. Ask for our Favorable pricing.



## HEAPRO STANDARD SERIES

Product Code	Model	Description
HSD-001	HEAPRO SD	Pin lock type plastic harness with HDPE shell
HR-001	HEAPRO SDR	Ratchet type plastic harness with HDPE shell
HY-001	HEAPRO SDY	Y strap type plastic harness with HDPE shell

### Colours Available :



The risk of head injury at work place is very common and should be taken care of in all circumstances. The use of safety helmets or hard hats prevents a worker from impact of a falling or flying object. Even a very small object falling from a height can cause a serious injury to a worker's head.

HEAPRO safety helmets are so designed as to protect and reduce the impact of any penetration or shock of a blow that may occur while in mining, construction, power and fabrication environments.

Although safety helmets provide limited safety against hazards at work place however if worn correctly, the right head gear ensures that most of the head injuries can be avoided or reduced thus protecting life of a worker.

Accessories like torch light, ear muffs and welding shields can also be used with manufacturer's guidelines.



Ratchet



Sweatband



Adjustable Quick Fit Pin Lock



Harness Comfort Cushion Pad

\*The manufacturer holds the right to change the design of any model of helmets without any intimation based on continuous improvement activity for user's comfort and safety

## ELECTRICAL SAFETY HELMET UNVENTED



SLOT AVAILABLE FOR FIXING HELMET ACCESSORIES



Ratchet



Sweatband



Harness Comfort Cushion Pad



### HEAPRO ELECELI

Product Code : ER-01

1	MADE OUT OF SPECIAL GRADE ABS MATERIAL WITH NOVEL DESIGN.
2	8 POINT TEXTILE SUSPENSION FOR COMFORT WEARING.
3	LIGHT WEIGHT YET STRONG TO ENSURE COMFORT DURING EXTENDED WORKING HOURS.
4	UNIVERSAL SLOTS ALLOW HEARING, WELDING AND VISOR ACCESSORIES TO BE ATTACHED EASILY.
5	AVAILABLE IN UNVENTED MODEL AND SMART SINGLE PIECE RATCHET DESIGN.
6	SIZE RANGE BETWEEN 52 CMS - 63 CMS.
7	TESTED FOR PROTECTION UPTO 20000 VOLTS.
8	SKIN FRIENDLY SWEAT PAD, CHIN STRAP AND CUSION PAD FOR EXTENDED WORKING COMFORT.
9	CONFORMS TO THE STANDARD :
	ANSI / ISEA 89.1 - 2014 TYPE I CLASS E & G. FOR ELECTRICAL INSULATION
	EUROPEAN STD. EN 397 : 2012 + A1 : 2012 LD-30 DEG. C

Colours Available :



Colours can be customised for high volumes

Available in HDPE shell also (Product Code : ER-02)

## SAFETY HELMET VENTED



LOUVERS FOR CROSS VENTILATION



### HEAPRO VENTRA VYZ

<b>Product Code : VR-0122</b>	
1	MADE OUT OF SPECIAL GRADE ABS MATERIAL WITH NOVEL DESIGN.
2	8 POINT TEXTILE SUSPENSION FOR COMFORT WEARING.
3	LIGHT WEIGHT YET STRONG TO ENSURE COMFORT DURING EXTENDED WORKING HOURS.
4	UNIVERSAL SLOTS ALLOW HEARING, WELDING AND VISOR ACCESSORIES TO BE ATTACHED EASILY.
5	AVAILABLE IN VENTED MODEL AND SMART SINGLE PIECE RATCHET DESIGN.
6	SIZE RANGE BETWEEN 52 CMS-64 CMS.
7	Y STRAPED CHIN STRAP FOR COMFORTABLE FIT.
8	SKIN FRIENDLY SWEAT PAD, CHIN STRAP AND CUSION PAD FOR EXTENDED WORKING COMFORT.
9	CONFORMS TO THE STANDARD :
	TYPE I, CLASS C
	EUROPEAN STD. EN 397 : 2012 + A1 : 2012 LD - 30 DEG. C

Available in HDPE material shell

#### Colours Available :



Colours can be customised for high volumes

# HEAPRO SAFETY EYEWEAR



**Product Code : HEP-01**  
 One Piece clear PC lens Scratch Resistant  
 Impact Resistant Light Weight  
 Zero Power - Suitable for Long Working Duration  
 Conforms to IS:5983



**Product Code : HEP-02**  
 One Piece clear PC lens Scratch Resistant  
 Impact Resistant Adjustable Templd  
 Zero Power-Suitable for Long Working Duration  
 Conforms to IS:5983



**Product Code : HEP-03**  
 One Piece lens 99.9% Protection from UVA & UVB rays  
 Clear Lens Scratch Resistant Vented Templd  
 Zero Power Suitable for Long Working Duration  
 Conforms to IS:5983



**Product Code : HEP-04**  
 One Piece PC lens 99.9% Protection from UVA & UVB ray  
 Scratch Resistant Fog Resistant Impact Resistant  
 Light Weight  
 Zero Power - Suitable for Long Working Duration  
 Conforms to IS:5983



# WELDING & FACE SHIELDS



Visor and Adaptors made up of PE material  
 can be easily fixed in Heapro Helmets  
 conforms to EN 166



**Welding Face Shield**  
 Product Code : WS-01

Welding Face Shield  
 Can be fixed with HEAPRO  
 helmets with fixing bracket and adaptors



**Fixing Bracket**  
 Product Code : FB-01



**Fixing Adaptor**  
 Product Code : FA-01



**Face Shield**  
 Product Code : FS-01

Polycarbonate Visor (1mm thickness)  
 Aluminium framing on the edge  
 Can be fixed with HEAPRO helmets  
 with fixing bracket and adaptors  
 conforms to EN 166

# HEAPRO SAFETY HARNESS

CE  
0598



## Full Body Harness

Product Code : HI-32

- Special Grade forged steel used for high tensile strength
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Polyester webbing with high breaking strength
- Trivalent plated metal parts - conforms to RoHS norms

**Attachment Elements:** A Dorsal attachment D-Ring for Fall Arrest

**Adaptability:** Adjustable Chest-Strap & Thigh-Straps

**Certified :** EN 361: 2002

**ISI Mark :** Conforms to IS 3521 (Part-1) : 2021

**User Capacity :** (59 – 100 Kgs)

**Weight :** 900 +/- 100 Gms

# HEAPRO SAFETY HARNESS

CE  
0598



## Full Body Harness

Product Code : HI-36

- Special Grade forged steel used for high tensile strength
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Polyester webbing with high breaking strength
- Trivalent plated metal parts - conforms to RoHS norms

**Attachment Elements :** 2 chest attachment D-Ring for tower climbing.  
A Dorsal Attachment D-Ring for Fall Arrest.

**Adaptability :** Adjustable Chest-Strap, Shoulder Strap & Thigh-Straps.

**Certified :** EN 361: 2002

**ISI Mark :** Conforms to IS 3521 (Part-1) : 2021

**User Capacity :** (59 – 100 Kgs)

**Weight :** 1400 +/- 100 Gms

# HEAPRO SAFETY HARNESS

CE  
0598



## Full Body Harness

Product Code : HI-40

- Made from high strength Polyester webbing
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Adjustment: 5 point adjustment means provided.
- Design: One dorsal attachment D ring for fall arrest
- Adjustable shoulder straps, chest straps and leg straps provided
- Hook parkers available.
- Metal parts are made from high strength alloy steel
- Quick release chest buckles

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 140 Kgs.

Certified : EN 361: 2002

User Capacity : 130 – 310 lbs. (59 – 140 Kgs)

Weight : 1200 +/- 100 Gms

# HEAPRO SAFETY HARNESS

CE  
0598



## Full Body Harness

Product Code : HI-41

- Made from high strength Polyester webbing dual color combination
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Adjustment: 5 point adjustment means provided.
- Design: One dorsal attachment D-ring for fall arrest
- Two front loops available on chest for fall arrest
- Adjustable shoulder straps, chest straps and leg straps
- Adjustable waist belt
- Equipped with work positioning belt.
- Padding available for ultra comfort.
- Metal parts are made from high strength alloy steel

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

Conformity : EN 361:2002 & EN 358:2018

User Capacity : (59 – 100 Kgs)

Weight : 1800 +/- 100 Gms



# HEAPRO SAFETY HARNESS

CE  
0598



## Full Body Harness

Product Code : HI-112A

- Made from high strength Polyester webbing
- Fully Adjustable means provided
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Comfort pad at shoulder waist & thigh enhances efficiency of worker during long working hours.
- One Dorsal D-ring, one chest D-ring, two Lateral D-ring
- Used for tower climbing, façade painting, window maintenance & rescue operations.
- Suitable for work positioning, fall arrest & work restraint situations

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Optional : Black Powder Coated metal Parts

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

Certified to: EN 361:2002, EN 358:2018 and EN 813:2008.

User Capacity : 59 – 100 Kgs

Weight: 2500 +/- 200 Gms

# HEAPRO SAFETY HARNESS



## Full Body Harness 5 Point

Product Code : AN-10

- Made from high strength Polyester webbing
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Adjustment: 5 point adjustment means provided.
- Design: One dorsal attachment D ring for fall arrest
- Adjustable shoulder straps, chest straps and grommeted leg straps provided
- Hook Parkers available.
- Metal parts are made from high strength alloy steel

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 140 Kgs.

Conformity : ANSI Z359.11:2021

User Capacity : 130 – 310 lbs. (59 – 140 Kgs)

Weight : 1800 +/- 100 Gms

# HEAPRO SAFETY HARNESS



## Full Body Harness 3 Point

**Product Code : AN-20**

• Made from high strength Polyester webbing dual color combination

- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Adjustment: 3 point adjustment means provided.
- Design: One dorsal attachment D ring for fall arrest
- Two side lateral Drings for work positioning
- Adjustable chest straps and grommeted leg straps provided
- Hook Parkers available.
- Metal parts are made from high strength alloy steel

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 140 Kgs.

**Conformity : ANSI Z359.11:2021**

**User Capacity : 130 – 310 lbs. (59 – 140 Kgs)**

**Weight : 1800 +/- 100 Gms**

# HEAPRO SAFETY HARNESS



## Full Body Harness 5 Point

**Product Code: AN-30**

• Made from high strength Polyester webbing dual color combination

- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Adjustment: 5 point adjustment means provided.
- Design: One dorsal attachment D ring for fall arrest
- Adjustable shoulder straps, chest straps and grommeted leg straps
- Adjustable waist belt
- Equipped with work positioning belt.
- Premium padding available for ultra comfort.
- Hook Parkers available.
- Metal parts are made from high strength alloy steel

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 140 Kgs.

**Conformity : ANSI Z359.11:2021**

**User Capacity : 130 – 310 lbs. (59 – 140 Kgs)**

**Weight : 2800 +/- 200 Gms**

# HEAPRO SAFETY HARNESS



## Full Body Harness 5 Point

Product Code : HI-40

- Made from high strength Polyester webbing
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Adjustment: 5 point adjustment means provided.
- Design: One dorsal attachment D ring for fall arrest
- Adjustable shoulder straps, chest straps and leg straps provided
- Hook parkers available.
- Metal parts are made from high strength alloy steel

Surface Finish: Trivalent plated metal parts - conforms to RoHS norms

Standard Compliance: Static strength: Min 15 KN

Dynamic Performance: Free fall retention for 5 min with dummy weight 140 Kgs.

Conformity : ANSI Z359.11: 2021

User Capacity : 130 – 310 lbs. (59 – 140 Kgs)

Weight: 1200 +/- 100 Gms



**Tool Bag**

Qty : 01  
Code : HTB-01



**Multipurpose Harness**

Qty : 01  
Code : HI-112



**HeaproMan's Kit Bag**

Qty : 01  
Code : HKB-01



**Anchorage Rope  
Polyamide 14 mm**

Qty : 01  
Code : HI-1900



**Webbing Sling**

Qty : 02  
Code : HI-1606



**Fall Arrester**

Qty : 01  
Code : HFA-01



**Kernmantle Rope**

Qty : 01  
Code : HI-1900K



**Karabiner**

Qty : 03  
Code : HI-224



**Heapro Swing Seat**

Qty : 01  
Code : HSS-01



**Descender**

Qty : 01  
Code : DS-01

## HEAPRO MAINTENANCE & WINDOW CLEANING KIT



# HEAPRO FORKED LANYARDS



CE



## Twin Tailed Elastic Forked Lanyard

**Product Code :** HI-742 KE

- Made from high strength Polyester webbing including elastic material
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 scaffolding hooks of opening 55mm
- Other side one screw locks karabiner
- Metal parts are made from high strength alloy steel
- Surface Finish: Yellow Passivation.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 128 Kgs.

**Conformity:** EN 354:2010 & EN 355:2002.

**User Capacity:** Max Rated Load 140 Kgs

**Weight:** 1800 +/- 200 Gms

**Length:** Relaxed Length- 1.5 Meter

**Stretched Length :** Max 2 Meter

# HEAPRO FORKED LANYARDS

CE



## Twin Tailed Webbing Forked Lanyard

**Product Code :** HI-722 KE

- Made from high strength Polyester webbing.
- Webbing Width: Min 43 mm.
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 scaffolding hooks of opening 55mm
- Other side one screw locks karabiner
- Metal parts are made from high strength alloy steel
- Surface Finish: Black ED coated.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

**Conformity:** EN 354:2010 & EN 355:2002.

**User Capacity:** Max Rated Load 100 Kgs

**Weight:** 1600 +/- 200 Gms

**Length :** 1.8 Meter (<2 Meter)

CE



## Twin Tailed Webbing Forked Lanyard

**Product Code :** HI-AL-722 KE

- Made from high strength Polyester Webbing.
- Webbing Width: Min 43 mm
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 light weighted Aluminum Scaffolding Hooks of opening 60 mm
- Other side one auto lock karabiner
- Metal parts are made from high strength special grade Aluminum
- Surface Finish: Natural White.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

**Conformity:** EN 354:2010 & EN 355:2002.

**User Capacity:** Max Rated Load 100 Kgs

**Weight:** 1200 +/- 200 Gms

**Length:** 1.8 Meter (<2 M)

# HEAPRO FORKED LANYARDS

CE



## Twin Tailed Forked Lanyard Rope Type

Product Code : HI-702 SE D

- Made from high strength Polyamide Rope.
- Rope Dia: 12mm.
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 scaffolding hooks of opening 55mm
- Other side small snap hook
- Metal parts are made from high strength alloy steel
- Surface Finish: Yellow Passivation.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

Conformity: EN 354:2010 & EN 355:2002.

User Capacity: Max Rated Load 100 Kgs

Weight: 1800 +/- 200 Gms

Length: 1.8 Meter (<2 M)

## Twin Tailed Forked Lanyard Braided Rope Type

Product Code : HI-682 KE

- Made from high strength Braided Rope.
- Rope Dia: 10.5 mm. (Conforming EN 1891:1998)
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 scaffolding hooks of opening 55mm
- Other side one auto lock karabiner
- Metal parts are made from high strength alloy steel
- Surface Finish: Yellow Passivation.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

Conformity: EN 354:2010 & EN 355:2002.

User Capacity: Max Rated Load 100 Kgs

Weight: 1500 +/- 200 Gms

Length: 1.8 Meter (<2 M)

CE



# HEAPRO FORKED LANYARDS

CE



## Twin Tailed Forked Lanyard Braided Rope Type

Product Code : HI-AL-682KE\_01

- Made from high strength Braided Rope.
- Rope Dia: 12 mm. (Conforming EN 1891:1998)
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 light weighted Aluminum scaffolding hooks of opening 65mm
- Other side one auto locks Aluminum karabiner
- Metal parts are made from high strength special grade Aluminum
- Surface Finish: Natural White.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

Conformity: EN 354:2010 & EN 355:2002.

User Capacity: Max Rated Load 100 Kgs

Weight: 1200 +/- 200 Gms

Length: 1.8 Meter (<2 M)

## Twin Tailed Forked Lanyard Braided Rope Type

Product Code : HI-AL-682KE\_02

- Made from high strength Braided Rope.
- Rope Dia: 12 mm. (Conforming EN 1891:1998)
- Breaking Strength: Min 23 KN.
- Design: Equipped with Energy absorber device
- One side 2 light weighted Aluminum Rebar Hooks of opening 110 mm
- Other side one auto lock karabiner
- Metal parts are made from high strength special grade Aluminum and Steel
- Surface Finish: Natural White.
- Standard Compliance: Static strength: Min 23 KN
- Dynamic Performance: Free fall retention for 5 min with dummy weight 100 Kgs.

Conformity: EN 354:2010 & EN 355:2002.

User Capacity: Max Rated Load 100 Kgs

Weight : 2200 +/- 200 gms

Length: 1.8 Meter (<2 M)

CE



# HOOKS & CONNECTORS

HEAPRO Connectors are made up of high tensile steel, Tested for corrosion resistance for Min. 72 Hrs of Salt Spray test.



### TRIANGULAR SHAPED / TWIST LOCK CONNECTOR

**Product Code : HI-226**  
 Conforms to EN 362:2004, Class B  
 Material : High Tensile Steel  
 Opening : 22 mm | Strength : > 23 KN



### AUTO LOCK KARABINER

**Product Code : HI-225**  
 Twist Lock / Self Locking  
 Conforms to : EN 362:2004 Class B,  
 Material :- High Tensile Steel,  
 Surface Finish : Trivalent coated yellow passivation,  
 Gate opening : 15 mm  
 Breaking Strength : 23 kN.  
 Net Weight : 267 gms



### SNAP HOOK

**Product Code : HI-242**  
 Conforms to EN-362 : 2004 Class A  
 Material : Alloy Steel  
 Opening : 18 mm | Strength : > 20 KN



### STEEL SNAP HOOK

**Product Code : HI-252**  
 Material: High Tensile Alloy Steel  
 Gate Opening: 22mm, Breaking Strength: Min 23 KN  
 Surface Finish: Galvanized with golden yellow/ silver passivation  
 Net Weight: 325 +/- 10 Gms, Process: Stamping  
 Conforms to: EN 362:2004/ANSI Z359.12, Class A

# HOOKS & CONNECTORS



### SCAFFOLDING HOOK

**Product Code : HI-262**  
 Conforms to EN-362 : 2004, Class A  
 Material: Forged Alloy Steel  
 Opening : 55 mm | Strength : >23 KN



### SCAFFOLDING HOOK ALUMINIUM

**Product Code : HI-111 AL**  
 Material: High Strength Aluminum Alloy  
 Gate Opening: 63 mm  
 Breaking Strength: Min 23 KN  
 Surface Finish: Natural Silver/Colored, Anodized.  
 Net Weight: 485 +/- 10 Gms  
 Conformity: EN 362:2004, Class A  
 Process: Forged.



### ROOF TOP ANCHOR

**Product Code : RT-01**  
 Material: Galvanized Steel with forged D Ring  
 Breaking Strength: Min 23 KN (5000 lbs)  
 Surface Finish: Galvanized with Golden Yellow Passivation  
 Net Weight: 1200 +/- 50 Gms  
 Conforms to ANSI Z359.1-2007




### ROLLER PULLEY

**Product Code : HI-PU-02**  
 Made from special grade Stainless Steel material with high strength & ultra light weight. Available with two Nylon Sheaves. Compatible to work with "Heapro Duro Rock Chair" for user comfort. Suitable to work up to 30 mm dia. Wire rope. Strength: Min. 15 KN.  
 Conforms to: EN 12278:2007.



### QUICK RELEASE BUCKLE

**Product Code : QR-01**  
 Material: High strength Alloy Steel  
 Breaking Strength: Min 15 KN  
 Steel Surface Finish: Silver / Golden yellow galvanized OR ED Coated Black  
 Net Weight: 130 +/- 10 Gms  
 Process: Stamped



### SPRING BUCKLE

**Product Code : SB-01**  
 Material: High Strength Alloy Steel  
 Breaking Strength: Min 15 KN  
 Surface finish: Silver / Golden yellow passivation  
 Net Weight: 90 +/- 5 Gms, Process: Stamped



### NON-OPENABLE TYPE FALL ARRESTER

**Product Code : HRG-01**  
 Non Openable type fall arrester works on 12mm kernmantle rope. It is generally used on platforms & roofs to prevent a worker from falling in the event of slipping.  
 Conforms to EN-353-2



### OPENABLE TYPE FALL ARRESTER

**Product Code : HFA01**  
 Heapro Openable type Fall Arrester made up of High Tensile Strength steel & works on 14 to 16 mm dia Polyamide Rope Conforms to EN-353-2



Head Office :  
**Heapro India Safety Products Pvt. Ltd.**  
353, MG Road, Opposite Govt. College,  
Gurgaon -122001 (Haryana) India  
E-mail : [exports@heapro.com](mailto:exports@heapro.com)

Unit-I :  
**Continental Manufacturing Co.**  
Plot No. 64, Sector-3, HSIIDC, IMT Bawal,  
Rewari -123501 (Haryana) India  
E-mail: [sales@heapro.com](mailto:sales@heapro.com)

Unit-II :  
**Heapro India Safety Products Pvt. Ltd.**  
Plot No. 64, Sector-14, HSIIDC, IMT Bawal,  
Rewari -123501 (Haryana) India  
E-mail: [sales@heapro.com](mailto:sales@heapro.com)