

Double Bubble

NHL-DB22 & NHL-DB24 DOUBLE BUBBLE LED DIRECT/INDIRECT



Job Name: _____

Type: _____

FEATURES / SPECIFICATIONS:

Reflectors and ends feature specially formulated proprietary matte white paint to enhance efficiency • Linear arrayed LEDs provide soft, effective illumination • LED light engine by LG Innotek

Housing:

- Die-formed heavy-gauge cold rolled steel.

Basket Options:

- Clear acrylic or clear w/overlay "Double Bubble" lens or high transmission extruded acrylic baskets

Finish:

- Low gloss, high reflectivity powder coat finish

Mountings:

- Standard troffer mounting for T-bar ceilings with earthquake feature

Light Source:

- Linear arrayed LED modules 350ma driver suitable for 120V-277V operation.

Wattage & Lumen Output:


- 22W-3,270 Lumens / 35W-6,341 Lumens / 44W-6,540 Lumens. Also suitable for T5 or T5HO linear lamps. Please consult factory for T5 options.

Dimming

- Constant current
- 0-10v dimming
- LM80
- 120-277v universal voltage
- Traditional narrow form factor fits fluorescent footprint

APPLICATIONS:

Suitable for recessed commercial and institutional applications such as offices, hospitals, schools etc. For use with standard 15/16" grid ceiling systems.

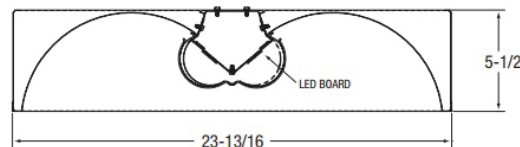

ORDERING CODE:

Fill in the boxes with the options you need fax it to us at: 732-833-8085

NHL-DB	Size:	Wattage:	Color Temp:	Voltage:	LED Options:
	2x2 2x4	22W- 22 Watts (2x2 Only) 35W- 35 Watts (2x4 Only) 44W- 44 Watts (2x4 Only)	27K =2,700K 30K =3,000K 35K =3,500K 40K =4,000K 50K =5,000K	UNV =120-277	EM =Emergency Battery FK =Drywall Flange Kit



New Horizon Lighting products reduce operating costs while delivering high efficiency lighting. NHL products are built in the USA and are available or through leading national distributors.

New Horizon Lighting
 P 732.833.8086 | F 732.833.8085
 9 Gladney Avenue
 Bayville, New Jersey 08721
www.newhorizonlighting.com