


AWP2 WALL PACK LIGHT

12W~120W Power and CCT Adjustable



INSTALLATION DIAGRAM

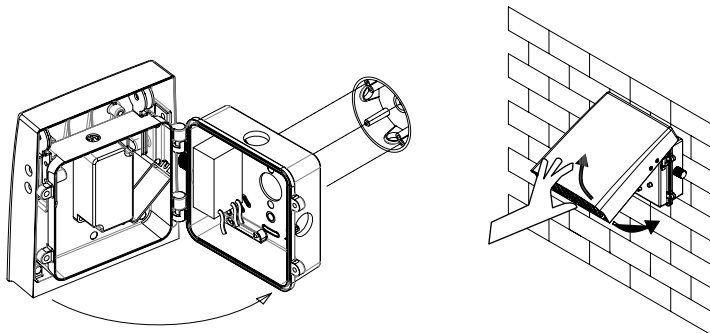

PRODUCT NUMBER BUILDER

Example:NHL-AWP2-50W-CCT-UNV-BR

Wall Pack power adjustable 50 watt, Wall mount installation, with a Bronze finish.

TECHNICAL SPECIFICATIONS

HOUSING	ACD12 aluminum heat sink, Outdoor powder coating.
VOLTAGE	120-277V, 60Hz AC
LED	LumiLEDs
EFFICACY	130 LM/W
LUMENS@5000K	1,560-15,600 lumens
POWER FACTOR	>0.9
BEAM ANGLE	90X120°
THD	<20%
OPERATING TEMP	-40°F-104°F
ALUMINUM LED BOARD	High conductive, Waterproof, Aging resistance, Salt mist resistance, Long-life.
CONTROLS / DIMMING	0-10V Dimming
CCT	3000K , 4000K, 5000K and 5700K
CRI	>70
RATED LIFE	70,000 hours


SERIES	WATT (W -8%~+5%)	COLOR TEMP. OPTIONS (CT)	VOLTAGE (V)	FINISH (ZZ)	OPTIC TYPE (Blank)	DIMMING (Blank)
NHL-AWP2	12W	CT=3,000K 4,000K 5,000K 5,700K	UNV-120-277	BR =BRONZE	90X120°	0-10V/PWM/VR
	50W					
	120W					

PRODUCT PARAMETER

MODEL	DIMENSION (in)	VOLTAGE (V)	WATT ADJUSTABLE RANGE (W -8%~+5%)	COLOR TEMP. ADJUSTABLE RANGE	LUMENS @ 5000K(Lm)	EFFICACY (Lm/w)	OPTIC TYPE	DIMMING
NHL-AWP2-12W CT-UNV-ZZ	6.0X5.0X3.4 in	UNV-120-277	12	3,000K, 4,000K, 5,000K, 5,700K	1,560	130	90X120°	0-10V/PWM/VR
NHL-AWP2-50W CT-UNV-ZZ	9.0X7.6X4.5 in	UNV-120-277	20W, 30W, 40W, 50W	3,000K, 4,000K, 5,000K, 5,700K	6,500	130	90X120°	0-10V/PWM/VR
NHL-AWP2-120W CT-UNV-ZZ	13.0X11.0X5.5 in	UNV-120-277	50W, 80W, 100W, 120W	3,000K, 4,000K, 5,000K, 5,700K	15,600	130	90X120°	0-10V/PWM/VR


DIMENSIONAL DRAWING

12W

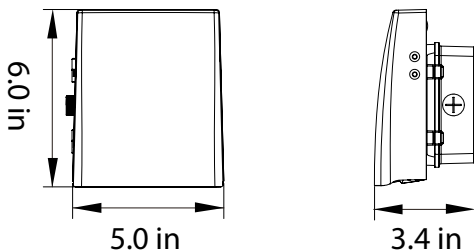


DIMENSIONAL DRAWING

50W

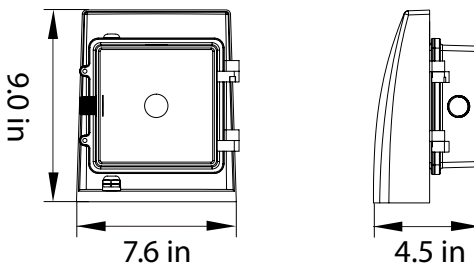


DIMENSIONAL DRAWING


120W

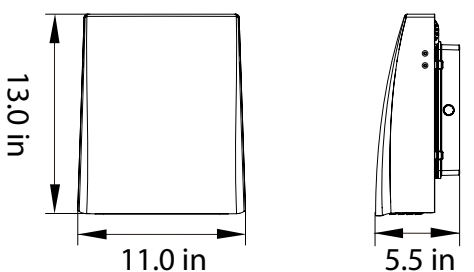

PHOTOMETRY

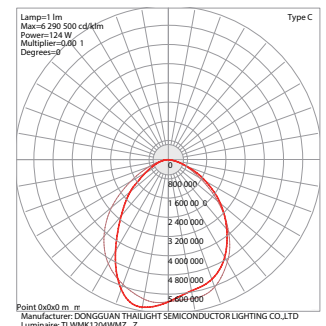

PHOTOMETRY

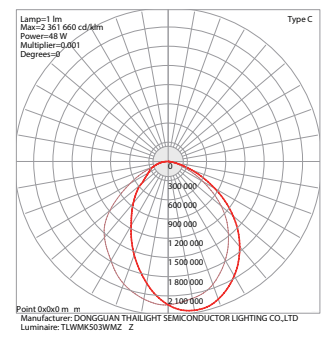

PHOTOMETRY

