



# Flood Light And Area Light

## NHL-RMH2



### Available Options



### Product Description:

This slick and modern luminaire has been designed to handle any environment. With a beautiful slimline design along with one of the highest lumen performance on the market, this versatile fixture can be used as a flood light or an area light. Including a multitude of mounting options, surge protection devices, IOT photocell capability, and the most technologically advanced LED's on the market, the NHL-RMH2 is ready to conquer the lighting landscape.

Optional Kelvin color\* with adder.

### Features:

- LISTING**  
UL and cUL listed for wet locations
- HOUSING**  
One piece die-cast aluminum body with die-cast hinge panel for easy installation access.
- LEDS**  
The most technologically advanced LED chips in the market
- FINISH**  
UV stabilized powder coated finish
- LENS**  
Optional Type III, Type IV, Type Voplics
- OPTIONS**  
Optional 347V or 480V with adder  
Bi-Level Dimmable or Photocontrol optional available with adder  
Finish - Bronze. Color option with adder  
Standard 4kV surge

### Performance Data


Model No.	Nominal Watts**	Dist. Type	Lu mens**	Efficacy**	Input Voltage
NHL-RMH2	235W	Type III	39692 lm**	172 lm/W	UNV=120-277V
	258 W	Type III	42696 lm**	164 lm/W	UNV=120-277V
	255W	Type III	42237 lm**	166 lm/S	HV4=347-480V

### Specification:

Example:NHL-RMH2

Model No.	Nominal Watts**	Color Temp	Distribution	Input Voltage	Finish	Option	
						Accessories	Mounting
NHL-RMH2	235=235W	40K=4000 K	T3=Type III	UNV=120-277V	BZ-Bronze	XS=1 0kv Surge OS=Occupancy Sensor* PC=Photocontrol 3R=3-pin Receptacle 5R=5-pin Receptacle 7R=7-pin Receptacle	AM=Arm Mount SF=Slip Fitter TM=Trunnion Mount
	258=258W	50K=5000 K	T4=Type IV	480V=347-480V			
	255=255W		T5=Type V				

### Dimension:

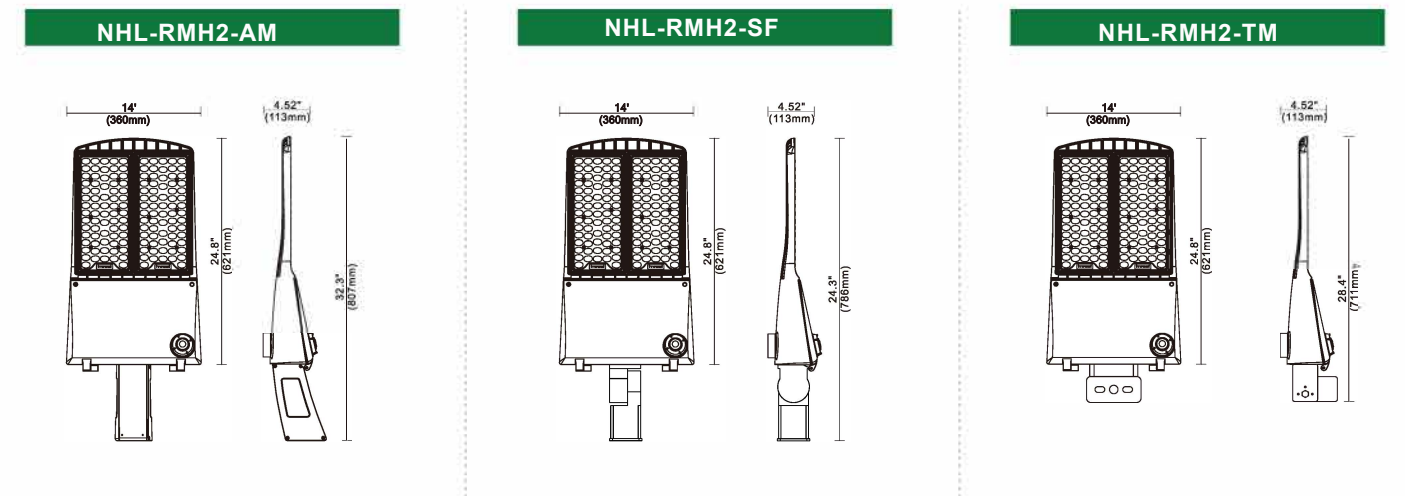

L70 Lifetime > 60,000 hours

5 Year Standard Warranty

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.