

NHL-SLE3 LED Linear Strip

5-Wattages + 5-CCT (30/35/40/50/65K), Damp Rated, Up to 150 lm/W, Dimmable + Smart

4-FT and 8-FT Direct Linear Ambient / High Bay Luminaires

FEATURES

Lumen Output	4500 to 15000 lumens
Efficacy	Up to 150 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
Size	4-FT, 8-FT
CCT	Select (3000K,3500K, 4000K, 5000K,6500K)
Rating	Damp Location
Warranty	5 Years



APPLICATIONS

Premium indoor luminaire for hanging or surface mounting in ceiling spaces less than 25 feet. Suitable for gymnasiums, warehouses, manufacturing, packaging, storage, aisles, work-stations, and covered decks.

CONSTRUCTION

Manufactured for durability using aluminum sheet housing with semi-gloss coating to resist corrosion, discoloration, and scratching. Damp Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 5-CCT (3000K,3500K, 4000K, 5000K,6500K) and Tunable 5-Wattages. Operating temperatures -4°F to 104°F (-20°C to 40°C).

MOUNTING

Surface mounting standard. Optional 10-FT Aircraft Cables for hanging available.

OPTICS

Anti-UV Frosted Polycarbonate Lens standard.

CONTROLS

Installed fixture mounted Microwave Sensor available. Remote Control available.

EMERGENCY

Installed 90 Minute Emergency Backup Battery LED Driver options available.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.


WARRANTY

5 year exclusive limited warranty.



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

3000K-3500K-4000K-5000K-6500K

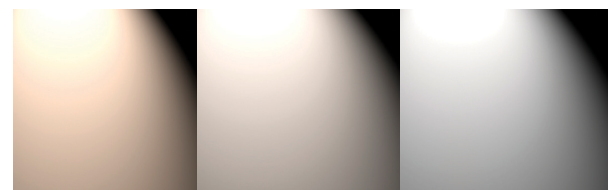

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 5-Wattages (70W Max, 100W Max)
Power Factor: >0.9
Total Harmonic Distortion (THD): <10%
Operating Temperature: -4°F to 104°F (-20°C to 40°C)

LIGHTING DATA

Lumens: 4500 to 15000
Lumens Per Watt: Up to 150 lm/W
Correlated Color Temperature (CCT): 5-CCT
Dimmable: 0-10V
Color Rendering Index (CRI): >80
L70: 50000 hours

ORDERING INFORMATION


Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
NHL-SLE3-4-70W-CT-UNV	4-FT	(30W, 40W, 50W 60W, 70W)	120-277V	0.28A@120V, 0.12A@277V 0.37A@120V, 0.16A@277V 0.46A@120V, 0.20A@277V 0.55A@120V, 0.24A@277V 0.65A@120V, 0.28A@277V	4500 6000 7500 9000 10500	150 lm/W	(3000K, 3500K, 4000K, 5000K, 6500K)	0-10V	White	48.0"L x 2.95"W x 2.99"H
NHL-SLE3-8-100W-CT-UNV	8-FT	(60W, 70W, 80W 90W, 100W)	120-277V	0.55A@120V, 0.24A@277V 0.65A@120V, 0.28A@277V 0.74A@120V, 0.32A@277V 0.83A@120V, 0.36A@277V 0.92A@120V, 0.40A@277V	9000 10500 12000 13500 15000	150 lm/W	(3000K, 3500K, 4000K, 5000K, 6500K)	0-10V	White	96.0"L x 2.95"W x 2.99"H

Housing	Mount	Control	Emergency
		Sensor	12V DC Integrated MW Bi-Level, AutoJack Connection, 0-10V dimming, Daynight Harvest
		Remote Controller	Smart Controller For Dimmable Sensor
	ACKIT	Pair of 10-FT Aircraft Hanging Cables (Fits: Strip Lights)	EM8 (BLD-CM08H-YYY-8W) INSTALLED - Emergency LED Driver, 8W, 90-Minute Battery

PHYSICAL DIMENSIONS

4-FT Models

48.0"L x 2.95"W x 2.99"H



8-FT Models

96.0"L x 2.95"W x 2.99"H

