



DESCRIPTION


The L600P Direct Pendant provides a truly unique and sophisticated look for any project requiring an easy to install, upscale lighting system. The L600P Direct Pendant is available in 3 and 4 inch apertures and gives you the efficiency you've come to expect from LED's with a slim and sleek profile making it the perfect choice for high-end hotel lobbies, offices, universities, and retail spaces.

SPECIFICATIONS


- Housing:** Extruded aluminum
- Lengths:** 4' and 8' fixtures for individual or continuous row mounting
- Finish:** Durable, low gloss, textured powder coating
- Approvals:** UL/cUL Listed
- Lumen Output:** Super saver, high output, very high putput, and extreme output options
- Optics:** Snap in acrylic lens for soft, diffused direct lighting.
- Dimming:** 0-10V dimming to <1%
- CRI:** 82+
- Mounting:** Single point cable mount or stem
- Battery:** Optional 12 watt constant power emergency battery
- Warranty:** 5-Year limited warranty

PHOTOMETRICS

* Measurements based on Very High Output Level 4' 4000k fixture with 3" Aperture

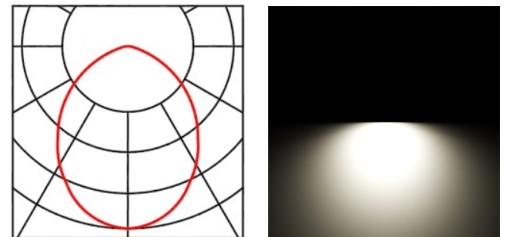

4526 lumens
107 lumens per Watt

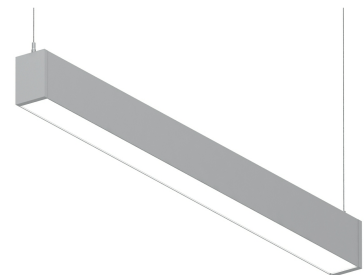

FIXTURE OPTIONS

Ordering Example: L603P-48-35-UE-HO-S-DAY-EC

LENGTH		COLOR TEMP		VOLTAGE		OUTPUT		FINISH		CONTROLS		OPTIONS	
48	4ft	30	3000K	UE	120-277v	SS	Super Saver (650 lumen s/ft)	W	White	BLANK	None	BLANK	None
96	8ft	35	3500K	347	347v	HO	High Output (1000 lumen s/ft)	S	Silver	DAY	Daylight	FF	Fast blow circuit
		40	4000K			VHO	Very High Output (1150 lumen s/ft)	B	Black	OCC	Occupancy	FS	Slow blow fuse
		50	5000K			EO	Extreme Output (1300 lumen s/ft)	CC	Custom Color	DOC	Daylight/Occupancy	EB	Emergency Battery
						* Consult factory for optional controls						EC	Emergency Circuit
						* Approximate lumen values at 4000CCT							


3" Aperture Lumen Output

Output Package	Lumens	Watts	Lumens Per/Foot	Lumens/Watt
Super Saver (SS)	2535	22.4	634	113
High Output (HO)	3859	34.6	965	112
Very High Output (VHO)	4526	41.7	1132	109
Extreme Output (EO)	5132	48	1283	107


4" Aperture Lumen Output

Output Package	Lumens	Watts	Lumens Per/Foot	Lumens/Watt
Super Saver (SS)	2647	22.4	662	118
High Output (HO)	4041	34.6	1010	117
Very High Output (VHO)	4737	41.7	1184	114
Extreme Output (EO)	5374	48	1344	112

MOUNTING SUPPORT LENGTHS & FIXTURE WEIGHTS

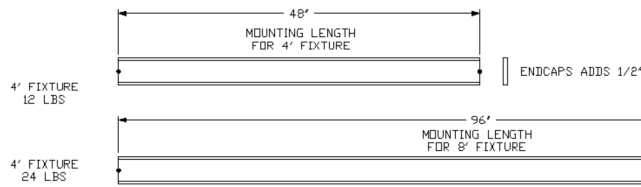

DIMENSIONS

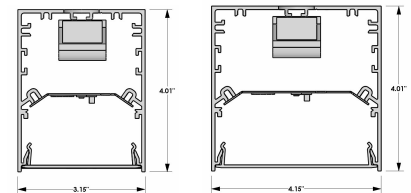

HARDWARE ORDERING EXAMPLE: SFD-C-15C-UE-FA-36

PREFIX		FIXTURE ATTACHMENT		CEILING TYPE		VOLTAGE		SUSPENSION		SUSPENSION LENGTH	
SFD	Single circuit feed dimmable	C	Single point cable	HC	Hard ceiling	UE	120-277	FA	Fully Adjustable	18	18" adjustable cable
EF	Emergency circuit feed	S	Stem mount	SC	Screw set clip	347	347			36	36" adjustable cable
NP	Non-power feed			15C	15/16" tee clip					72	72" adjustable cable
SIDP	Stem power feed			9C	9/16" tee clip					144	144" adjustable cable
SIDNP	Stem non-power feed										

** KIT CONTENTS: Support clips for T-bar, OR straps for J-box, with threaded stud for cable connection, one white canopy, aircraft cable, feed cord (except non-feed hangers), fixture attachment hardware

ENDCAPS

FIXTURE SERIES	WIDTH	DESCRIPTION
L603P - EP	3"	Cable mount end plate kit
L604P - EP	4"	Cable mount end plate kit
L603P - SEP	3"	Stem mount end plate kit
L604P - SEP	4"	Stem mount end plate kit

* One end cap kit required per fixture run

MOUNTING TYPES

