

INSTALLATION INSTRUCTIONS

○ OUTSIDE MOUNT ONLY ○

ATTENTION WARNING

Installers: Do not remove warning tags and or labels at time of installation.

TOOLS PROVIDED

2" #6 Hex Screws
3/4" #8 Hex Screws
"L" Brackets
Cord Cleat For Standard Control
Tension Device for Cord Loop Control

TOOLS NEEDED

Drill
1/4" Hex Bit
Phillips Bit
5/64 Drill Bit for Pre Drilling
Pencil
Tape Measure

CORD CLEAT INSTALLATION


Follow the cord cleat installation instructions in step four.

For the purpose of child safety be sure to install cord cleats in a location that is not accessible to small children.

Take note of any furniture or objects a child may use to access the cord cleat.

Be sure to simply wrap the cord on the cleat after every use

DIAGRAM ONE:

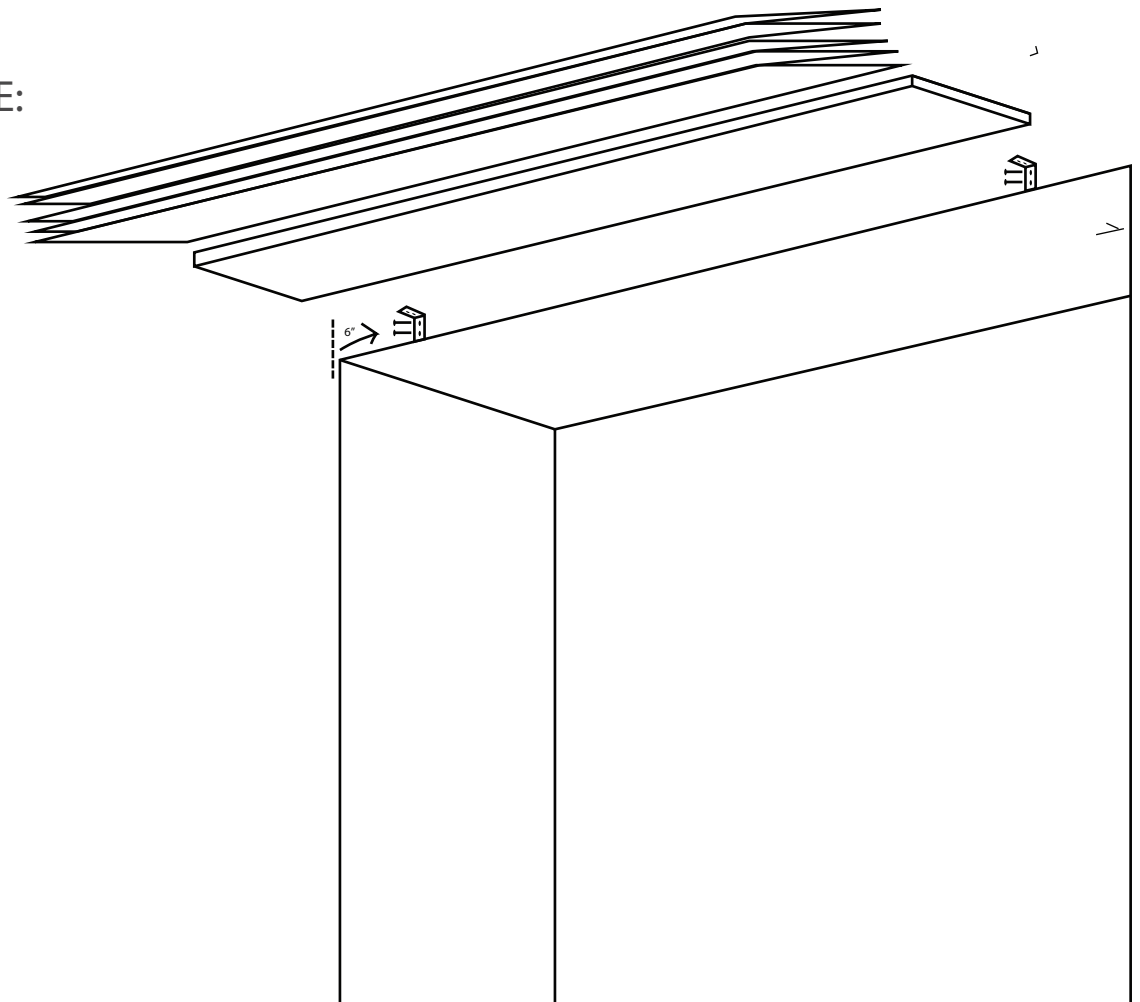

STEP ONE

A. Measure in 6" from each end from where the shade will be mounted and up (at least the length of the bracket) to the desired height and make a mark.

B. Place additional brackets if the space between exceeds 36". NOTE: The board thickness is included in the length of the shade when marking for bracket placement.

STEP TWO

Line up the shade with the marks made in the previous steps and screw the mounting board into the mounting surface. **Note: be sure to use sheet rock anchors when needed if wood or a solid mounting surface is not hit with the screws.**

STEP THREE

Set shade on top of the bracket and use short screws provided to secure it to the brackets.

STEP FOUR

Attach the cord cleat or tension device with the provided screws in a place that will not interfere with the shade being operated.

The tension device should not be installed so that the chain is not twisted and has enough tension to keep the cord tight but not to make it difficult to operate because it may cause excessive wear.

DIAGRAM TWO:

