


BASIC Table Topper #4

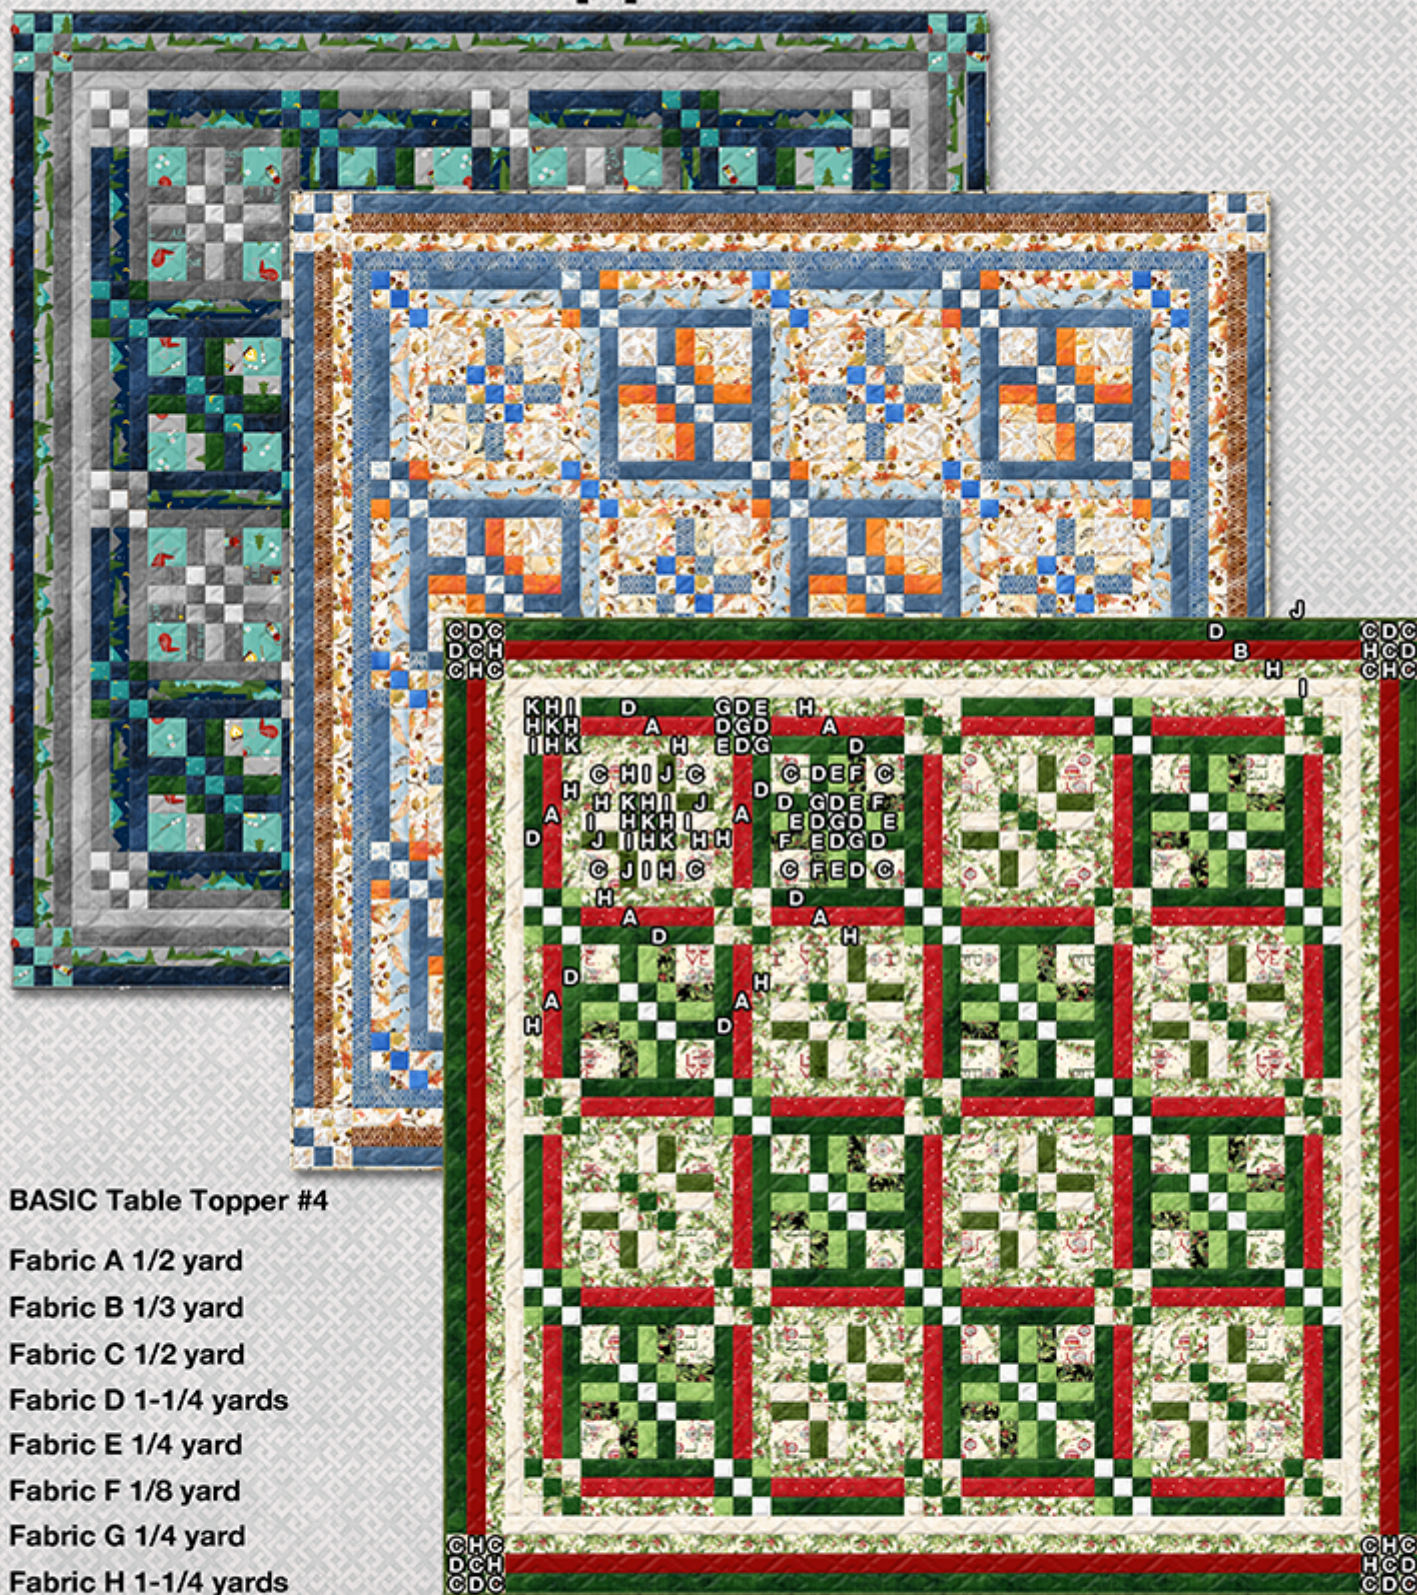

BASIC Table Topper #4

Fabric A 1/2 yard

Fabric B 1/3 yard

Fabric C 1/2 yard

Fabric D 1-1/4 yards

Fabric E 1/4 yard

Fabric F 1/8 yard

Fabric G 1/4 yard

Fabric H 1-1/4 yards

Fabric I 1/2 yard

Fabric J 5/8 yard (Incl. Binding)

Fabric K 1/4 yard

Fabric L 3-1/3 yards (44/45" Backing Only)

Quilt Size: 51" Square



www.wilmingtonprints.com

BASIC Table Topper #4

Please read all instructions carefully AND identify all fabrics before beginning.

All instructions include a 1/4" seam allowance and strips are cut selvage to selvage, unless stated otherwise.

1. Cut the following:

Fabric A - Cut 8 - 1-1/2" strips

Fabric B - Cut 5 - 1-1/2" strips, sew end to end for 1 long border strip

Fabric C - Cut 4 - 2-1/2" strips, subcut 64 - 2-1/2" squares

Cut 1 - 1-1/2" strip, subcut 20 - 1-1/2" squares

Fabric D - Cut 14 - 1-1/2" strips

Cut 1 - 1-1/2" strip, subcut 8 - 1-1/2" squares (corner blocks)

Cut 5 - 1-1/2" strips, sew end to end for 1 long border strip

Fabric E - Cut 4 - 1-1/2" strips

Fabric F - Cut 2 - 1-1/2" strips

Fabric G - Cut 3 - 1-1/2" strips

Fabric H - Cut 14 - 1-1/2" strips

Cut 1 - 1-1/2" strip, subcut 8 - 1-1/2" squares (corner blocks)

Cut 5 - 1-1/2" strips, sew end to end for 1 long border strip

Fabric I - Cut 4 - 1-1/2" strips

Cut 5 - 1-1/2" strips, sew end to end, then subcut 2 - 1-1/2" x 43-1/2" and 2 - 1-1/2" x 45-1/2"



Fabric J - Cut 2 - 1-1/2" strips

BINDING - Cut 6 - 2 - 1/2" strips, sew end to end and press in half


Fabric K - Cut 3 - 1-1/2" strips

2. Piecing Order:


1. Make 21 - 3" finished (3-1/2" unf.) 9-patches for **Block #1** and sashing. First, make 2 strip sets by sewing **K, H, I** 1-1/2" strips side by side for the top and bottom rows. Press toward the outside strips, then subcut 42 - 1-1/2" segments. Next, make 1 strip set by sewing **H, K, H** 1-1/2" strips side by side. Press toward the middle strip, then subcut 21 - 1-1/2" segments for the middle row.

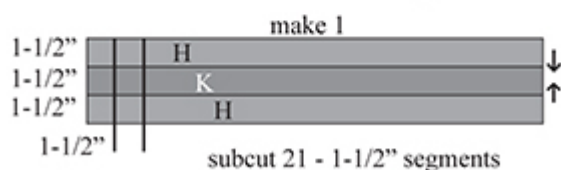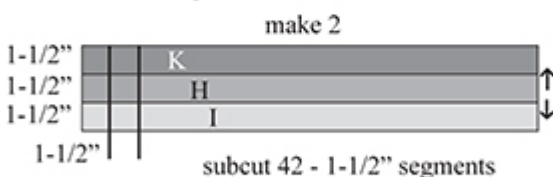

Then sew segments together for 21 9-patches according to the diagram. Press toward the top and bottom rows:

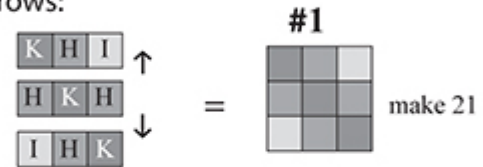


2. Make 2 strip sets by sewing **H, I, J** 1-1/2" strips side by side. Press toward the middle strip. Subcut 32 - 2-1/2" segments.


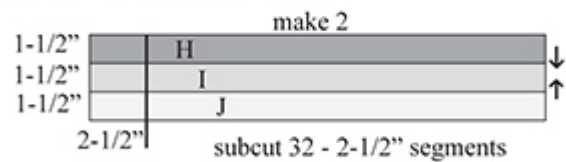


3. Make 8 - 7" finished (7-1/2" unf.) **Block #1**.

Sew 9-patches from step 1, segments from step 2, and **C** 2-1/2" squares together into rows, then sew rows together according to the diagram.

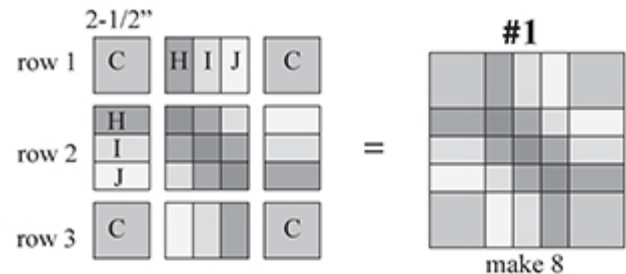


4. Make 20 - 3" finished (3-1/2" unf.) 9-patches for **Block #2** and sashing. First, make 2 strip sets by sewing **G, D, E** 1-1/2" strips side by side. Press toward the outside strips, then subcut 40 - 1-1/2" segments for the top and bottom rows. Make 1 strip set by sewing **D, G, D** 1-1/2" strips side by side. Press toward the middle strip, then subcut 20 - 1-1/2" segments for the middle row.

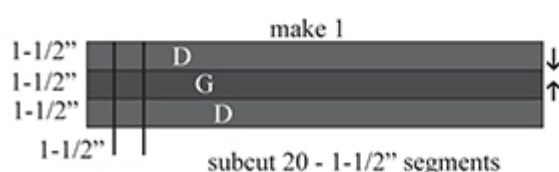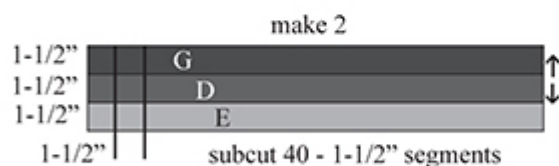


BASIC Table Topper #4


Then sew segments together for 20 9-patches according to the diagram. Press toward the top and bottom rows.

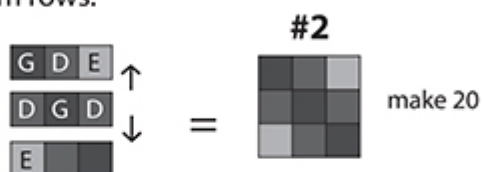


5. Make 2 strip sets by sewing **D, E, F** 1-1/2" strips side by side. Press toward the middle strip, then subcut 32 - 2-1/2" segments.

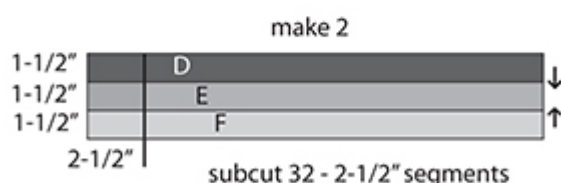


6. Make 8 - 7" finished (7-1/2" unf.) **Block #2**. Sew 9-patches from step 4, segments from step 5, and **C** 2-1/2" squares together into rows, then sew rows together according to the diagram.

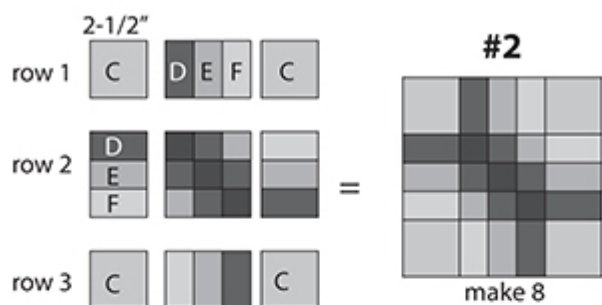

7. Make 4 - 3" finished (3-1/2" unf.) corner blocks by sewing **C, D,** and **H** 1-1/2" squares together into rows, then sew rows together according to the diagram. Press toward the middle row.

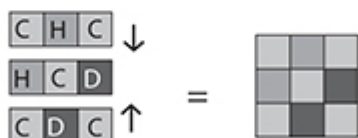

8. Sashing: make 8 strip sets by sewing **D, A, H** 1-1/2" strips side by side. Press toward the middle strip, then subcut 40 - 7-1/2" segments.

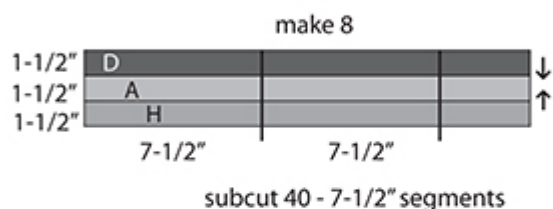


Next, sew 4 sashing segments alternating with #1 or #2 9-patches according to the diagram of the quilt on the next page. Notice each sashing strip is rotated. Make 5 sashing rows.

9. Make 4 block rows, each consisting of 2 **#1 blocks**, 2 **#2 blocks**, and 5 sashing segments according to the diagram on the next page. The block order is identical for each row, but the rows are flipped when sewn into the quilt. Notice the **H** strip of the sashing segments surround **block #1** and the **D** strip of the sashing segments surround **block #2**.

10. Sew quilt center together by alternating sashing rows and rows of blocks according to the diagram.


11. Sew **I** 1-1/2" x 43-1/2" to the SIDES of the quilt, then sew **I** 1-1/2" x 45-1/2" to the TOP and BOTTOM.

12. Make 1 long border strip set by sewing **D, B, H** 1-1/2" strips side by side. Press toward the outside strips, then subcut 4 borders 45-1/2" long (or measure your quilt for the exact length to cut).

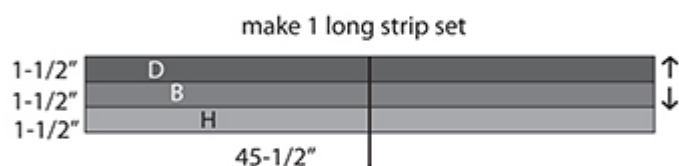

13. Sew a border strip set to the SIDES of the quilt, with **H** toward the center. Next, sew a corner block to both ends of the 2 border strip sets, then sew to the TOP and BOTTOM of the quilt according to the diagram.

BASIC Table Topper #4

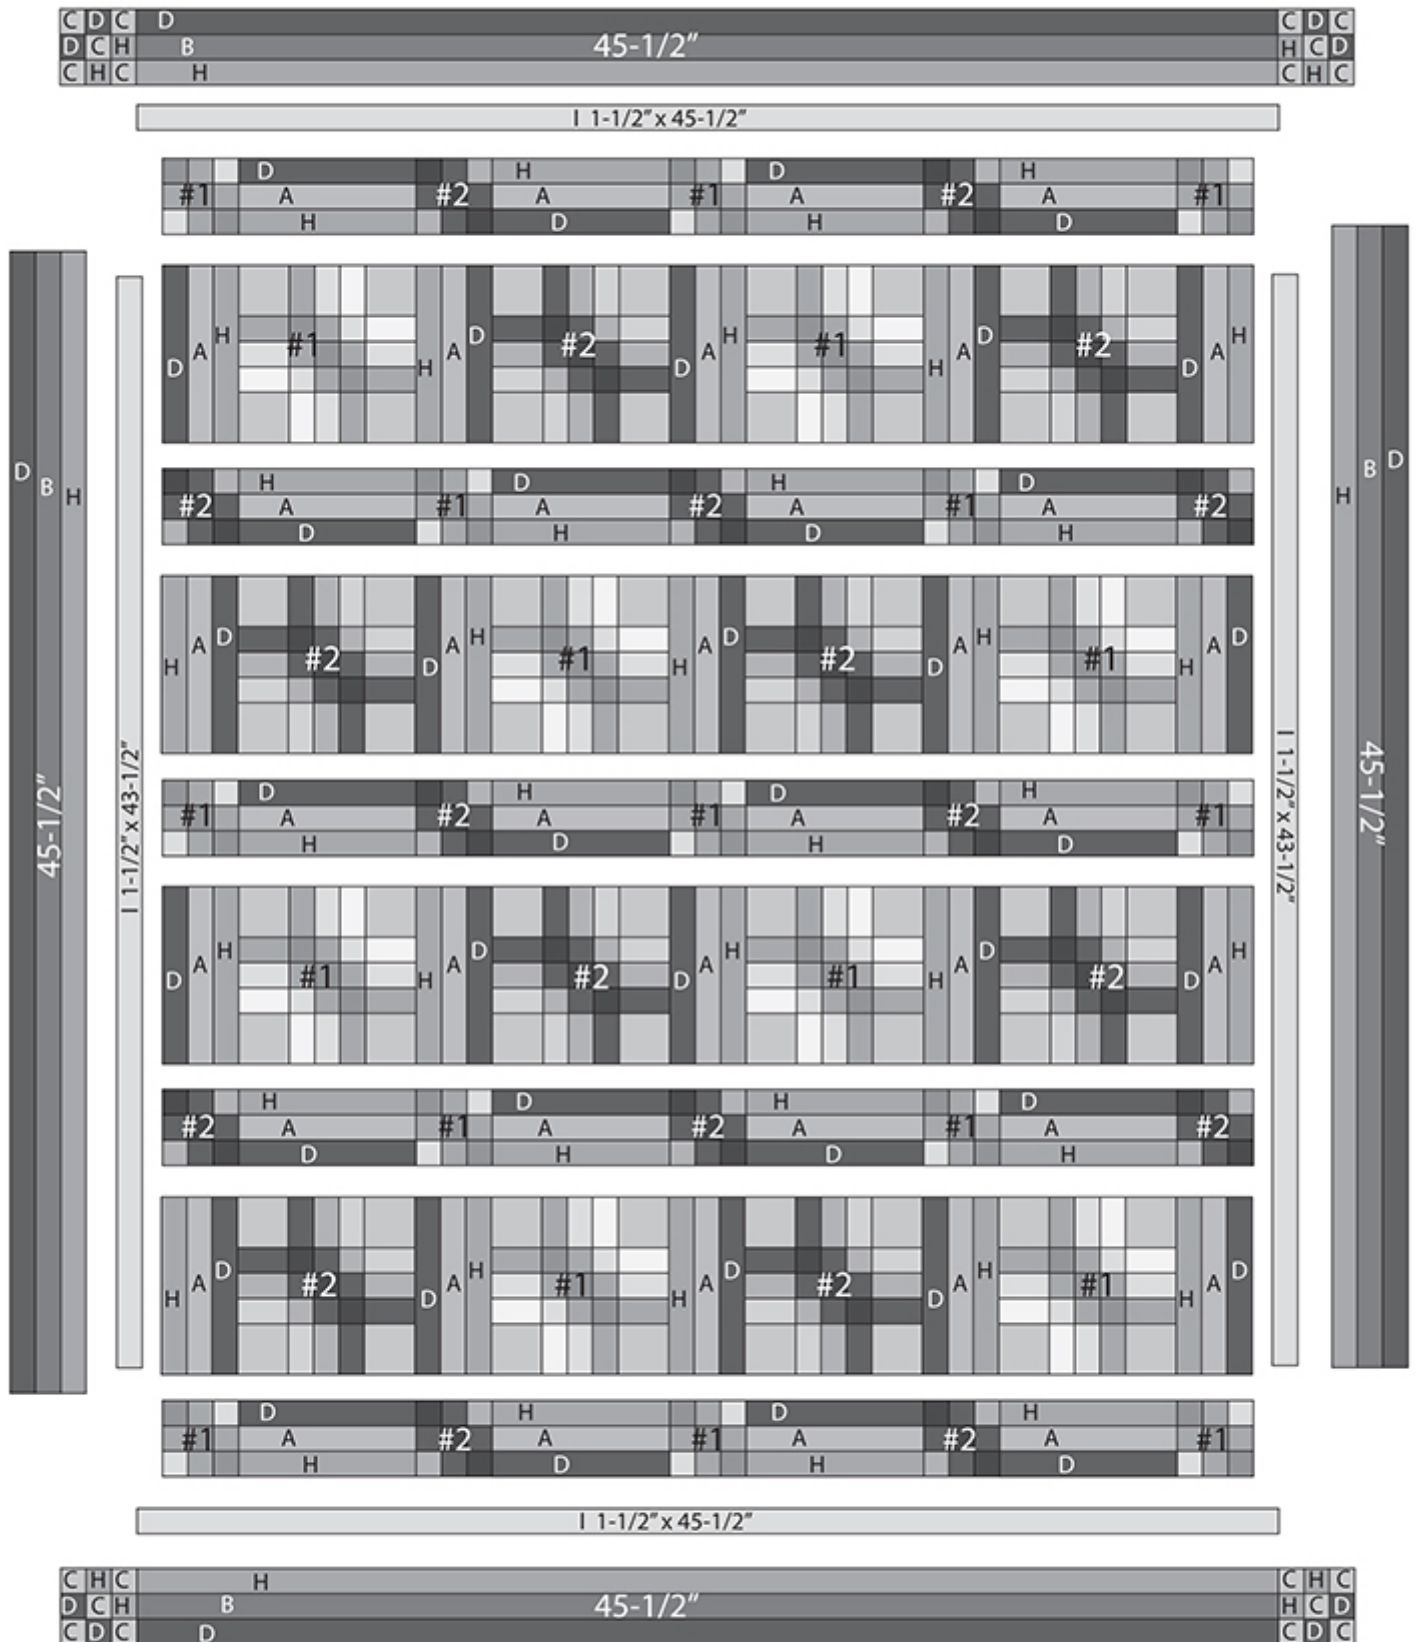

14. The quilt measures approximately 51-1/2" x 51-1/2". Make backing (**Fabric L**) at least 8" larger than the top. Layer and baste top, batting, and backing together. Quilt as desired. Attach binding (**Fabric J**) and enjoy!!