



INSTALLATION MANUAL

TAILGATE TABLE

AC-TB-200

MADE IN THE USA



Tailgate Table for Jeep's & Ford Broncos

Description	Quantity
Assembled Tailgate Table	1
10x1/2 Phillips round Head Screw (JK Jeep Model & Bronco)	6
Aluminum Spacer	3
Oil Resistant O Rings	6
M6 x 40MM Button Head Bolts (JK Jeep Model)	3
5/32 Black Rivet	2
1/8 Aluminum Pop Rivet	2

MODEL INSTRUCTIONS

JL: PG. 2

JK: PG. 3

BRONCO: PG. 4

1/8 Drill Bit required for JK & Bronco Installation.

Step 1: JL

Remove the cover off the screw mounts on the tailgate. Pop it off on he end and work your way down each side.



Step 2: JL


Open the tailgate table and use the three large holes to run a bolt through each. On the back side: install a single O-ring, then the aluminum spacer, and another O-ring. This will hold your spacer in place while you install the tailgate table.



Step 3: JL

Line up the bolts with the factory mounts on the tailgate. Install each bolt loosely to catch the threads and hold it in place. Then secure the tailgate table by tightening each bolt. A second person may be required while you start each bolt.

The tailgate table can be held by just the three bolts in the factory mounts. If you would like to attach the bottom of your tailgate table, you can use the Phillips round head screws to secure them to the plastic. No drilling necessary. Installation is complete.

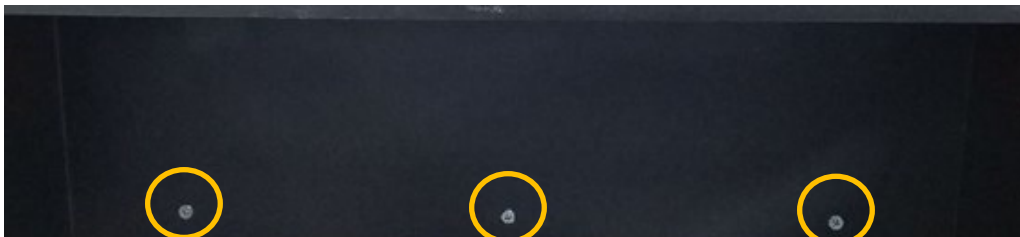

Step 1: JK

Open your tailgate and remove the plastic wire cover at the top. Clean the tailgate off to provide a clean mounting surface.




Step 2: JK

First, you will mark where the bottom middle bolt hole is going to be. On the large middle cutout, you can measure 2 1/16 in. from the ridge. Then the third vent in from the right hand side, measure 2 1/16 in. up to mark your first drill point.



Step 3: JK

Use a 1/8 drill bit. Drill a hole where you have marked and secure the tailgate table into place with a single Philips round head screw. Once your tailgate table is placed, use a marker to locate where you will drill the remaining 5 screws. After you have marked all of the holes to be drilled, remove the tailgate table and finish drilling. Then complete final installation with your remaining screws.

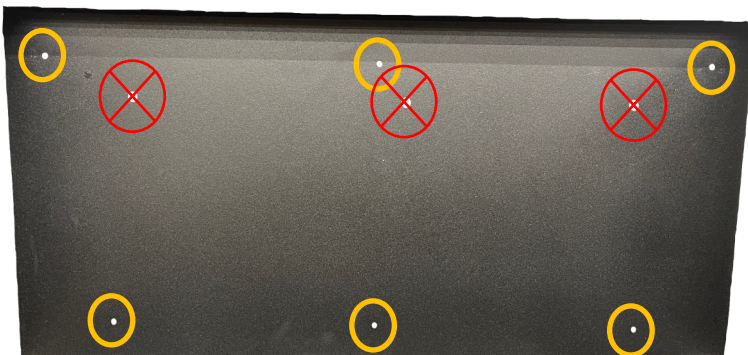

IMPORTANT

Do not drill the three large holes on the back of the tailgate table. Those are for the JL Model installation.

Step 1: Bronco

Begin by marking where you will drill your first hole for the tailgate table. Between these four features, mark your drill point at the center. Drill with a 1/8 drill bit and place the tailgate table with one Phillips round head screw.



Step 2: Bronco

Once your tailgate table is placed, use a marker to locate where you will drill the remaining 5 screws. After you have marked all of the holes to be drilled, remove the tailgate table and finish drilling. Then complete final installation with your remaining screws.



IMPORTANT

Do not drill the three large holes on the back of the tailgate table. Those are for the JL Model installation.

You are finished!

Scan this code to leave a review!



WARRANTY POLICY

LIMITED TWELVE (12) MONTH WARRANTY FOR FINISH AND ELECTRICAL COMPONENTS

Rock-Slide Engineering, LLC (“RSE”) warrants to the original purchaser that (a) the structural and mechanical components of the Step Sliders will be free of defects in material and workmanship for the lifetime of the Step Sliders (the “product”), and (b) the finish (powder coat) and the electrical components (including the motor) will be free of defects in material and workmanship for a period of twelve (12) months from the original date of purchase. This warranty applies only to the original retail purchaser. Warranty is void if product was not purchased directly from R- SE or from an authorized RSE retailer or reseller. This warranty applies only with regard to the product as originally installed to the original vehicle. This warranty does not cover removal or reinstallation of the product.

To exercise this warranty and receive any warranty service, the original purchaser must provide RSE with proof of purchase and date of purchase that is acceptable to RSE, such as a copy of the original purchaser’s purchase receipt. The original purchaser must return the defective product to RSE along with a description of the problem, a copy of the original purchase receipt, the original bill of sale and all contact information (name, address, telephone number and email address). To begin the warranty process, the original purchaser must email RSE’s warranty department. During this warranty term, and upon the original purchaser’s valid exercise of this warranty, RSE shall, at its option, repair or furnish the replacement product in the event the original product is deemed by RSE to be defective. RSE’s sole liability shall be for repairing or replacing the product, but RSE may refund the purchase price at its sole discretion and option. The original purchaser is responsible for prepayment of all shipping and/or transportation charges with respect to the exercise of this warranty. The product may change without notice. In the event of a product change, RSE has no obligation to upgrade or modify any older generation product.

THE WARRANTY SET FORTH HEREIN IS THE ONLY WARRANTY COVERING THE PRODUCT. NO OTHER WARRANTY EXISTS, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE. No retailer, reseller, dealer, agent, or employee is authorized to make any modifications, extensions, amendments, or additions to this warranty.

This warranty shall be void in its entirety if RSE determines that the product installation was modified, changed, altered, customized or in any way used other than as instructed. Installation of the product without strictly adhering to the installation instructions shall void this warranty. Installation must be on the proper vehicle or warranty is void.

RSE SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, UNDER ANY LEGAL THEORY AND/OR UNDER ANY CIRCUMSTANCE WHATSOEVER. IN ANY EVENT, ANY DAMAGES IN ANY SITUATION SHALL BE LIQUIDATED DAMAGES AND MAY NOT EXCEED THE RETAIL PRICE OF THE PRODUCT. RSE SHALL NOT BE LIABLE FOR ANY LOSS, DAMAGE OR INJURY DIRECTLY OR INDIRECTLY ARISING FROM THE USE OF OR INABILITY TO DETERMINE THE USE OF THE PRODUCT. THE ORIGINAL PURCHASER IS RESPONSIBLE TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, PRIOR TO USING THE PRODUCT, AND THE ORIGINAL PURCHASER ASSUMES ALL RESPONSIBILITY AND RISK IN CONNECTION THEREWITH.

For questions or concerns: please contact our office at 435-752-4580 and ask for the warranty department or email us at warranty@rockslideengineering.com.