Low Consumption Washout Urinal







UT104V Back Spud

- Low consumption one gallon or less per flush
- Compact design
- Washout flush action
- Integral trap

Vitreous china low consumption washout urinal. Includes wall hangers, ³/₄" inlet spud, 2" I.P.S. outlet flange and rubber gasket. ADA Compliant.

■ UT104

Low consumption washout urinal Top Spud Inlet

■ UT104V

Low consumption washout urinal Back Spud Inlet

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Recommended flushometer valve: TOTO Manual and Electronic Flush Valves are highly recommended for maximum performance.



UT104

Low Consumption Washout Urinal

■ SPECIFICATIONS

Water Use: 0.5 - 1.0 Gpf Flush System: Washout flush

action

Warranty: One Year Limited

Warranty

Material: Vitreous china

Min. Water Pressure: 15 psi

(Flowing)

Height (Urinal Only) $21\frac{1}{4}$ " Width $12\frac{1}{2}$ " Rim 14"

Shipping Weight: UT104 / UT104V

34.5 lbs.

Shipping Dimensions: UT104 / UT104V

24"L x $13^3/_4$ "W¹

x 15³/₈"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.


Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.




Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of rim is 17"maximum from the finished floor.

Note: Refer to manufacturer's instructions and local codes for proper flushometer valve installation and requirements.

These dimensions and specifications are subject to change without notice.

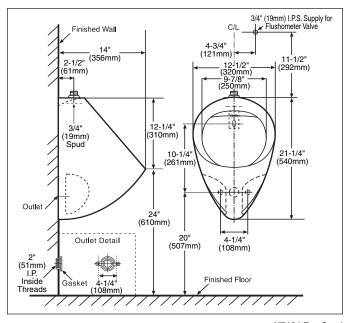

UT104 Top Spud



UT104V Back Spud



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com Printed in U.S.A. © TOTO U.S.A., Inc. 10/06